

GOOD NIGHT

Indoor products



Recessed

Recessed

16	Perduo Trimless	103	Compactus-Asy
18	Ipsufacto-a	104	Incognit GU10
22	Ipsufacto-a HE	106	Lenis GU10
24	Ipsufacto-a T 230	108	Big Lenis
26	Ipsufacto-a Low 230	110	Arus
27	Ipsufacto-a GU10	111	Big Ipsufacto f
28	Ipsufacto-a 95 HE	112	Superavit
30	Ipsufacto-a 95 T230	114	Big Curriculum
32	Ipsufacto-a 95 Low 230	115	Mergo
33	Ipsufacto-a 95 GU10	116	Lacunar Trimless
34	Ipsufacto-ip	117	Rotundus-UGR<19
36	Ipsufacto-ip 82 HE	118	Savanna 60x60 UGR<19
38	Curriculum-f	119	Savanna 60x60 Opal
40	Curriculum-f 90 HE	120	Savanna 120x30 Opal
42	Curriculum-f 90 T 230	121	Eclipsim
44	Curriculum-f 90 Low 230	122	Praetorium
46	Curriculum-f 90 GU10	123	Lacrima
48	Curriculum-a	124	Tellus
50	Suffixus HE	125	Scala
52	Suffixus T 230	126	Oculus
54	Suffixus Low 230	127	Signum
56	Suffixus GU10		
58	Marcus HE		
60	Marcus T 230		
62	Marcus Low 230		
64	Marcus GU10		
66	Obliquo HE		
67	Obliquo T230		
68	Obliquo Low 230		
69	Obliquo GU10		
70	Pendo HE		
71	Pendo T 230		
72	Pendo Low 230		
73	Pendo GU10		
74	Balnearis		
76	Mini-ipsufacto		
78	Minicurriculum f		
79	Minicurriculum a		
80	Deminutus		
81	Nolitus		
82	Parvus R		
83	Parvus Q		
84	Mini Parvus		
85	Mini Parvus Wood		
86	Honoris		
87	Honestus R HE		
88	Honestus Q HE		
89	Honestus Q2 HE		
90	Cicada HE		
92	Cicada GU10		
96	Quadratum-01 Trimless		
97	Quadratum-02 Trimless		
96	Quadratum-11		
97	Quadratum-12		
98	Quadratum-03 Trimless		
99	Quadratum-13		
100	Compactus-1		
101	Compactus-2		
102	Compactus-3		



MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA



Perduo Trimless

10092

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2*9W
Lumen Output	596
Connection	700mA
Driver	Included remote
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø125 h113 mm
Dimensions	Ø123,6 h112,2 mm
Adjustable	+/- 20°

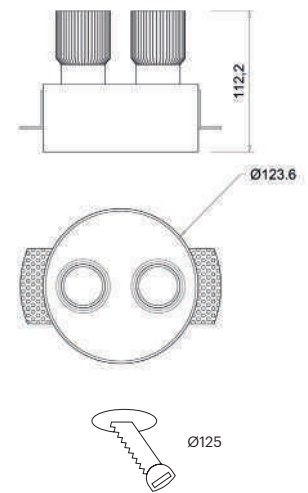

10092.18.271.20

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10092	18	27 2700	 1 Narrow 18°	● 20 Black	NDI* Driver included (non-dimmable) Dimmable driver upon request



Ipsufacto-a

10001

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI



WIRELESS



SPECIAL LED
FOOD AND
OTHERS



OTHER COLOUR
TEMPERATURES





Adjustable




Installation	Indoor		
Mounting Position	Ceiling recessed		
IP	20		
Wattage	11W	15W	GU10
Lumen Output	820	1200	
Connection	250mA	350mA	230V
Driver	Included remote		
Dimmable	ON/OFF, DALI, PUSH (See drivers section)		

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø76 h112mm
Dimensions	Ø82 h102mm
Adjustable	+/- 20°



10001.A.20.99 Spread lens

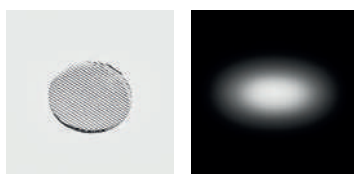




10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

Recessed

10001.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	11	27 2700	 1 Narrow 20°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	15	30 3000	 2 Medium 40°	● 20 Black	
			 4 Superwide 60°	● 40 Gold	

10001.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	GU10 (230V lamp not included)	XX	X	○ 10 White ● 20 Black ● 40 Gold	Depending on lamp



Available SORAA lamps

10001.A.11.10 Square frame-1
10001.A.12.10 Square frame-2

○ White

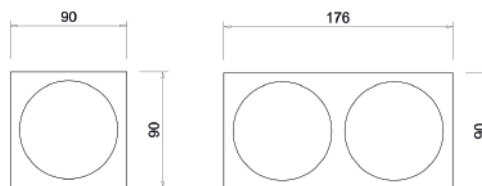



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



PROJECT: OCTAVIO MESTRE ARQUITECTOS

Ipsufacto-a HE

10001

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE


DIMMABLE

CASAMBI


WIRELESS




Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90	 Ø76
Life Time	L80/B10 >55.000 h	
Cut-out Size	Ø76 mm	
Adjustable	Yes	



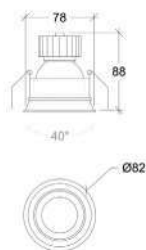

Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø82 h88mm
Cut-out Size	Ø76 h98mm

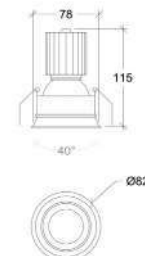

Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø82 h115mm
Cut-out Size	Ø76 h120mm




10001.*.**.*.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	5	27 2700	 1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	 2 Medium 25°	● 20 Black	
		40 4000	 3 Wide 39°	● 40 Gold	
			 4 Superwide 61°		



10001.A.20.99 Spread lens

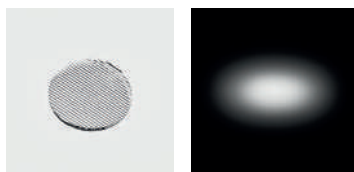

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



Other finishes upon request

Ipsufacto-a T230


GOOD NIGHT

10001

Recessed



Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10>25.000 h
IP	20	Cut-out Size	Ø76 h127mm
Wattage	10W	Dimensions	Ø82 h117mm
Lumen Output	760	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		

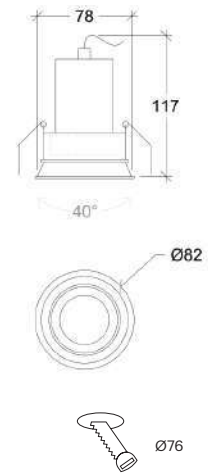


10001.10.**.***.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	10	27 2700	1 Narrow 12°	○ 10 White	DTR Phase dim
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 40 Gold	



10001.A.20.99 Spread lens

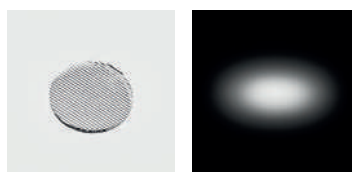

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



Other finishes upon request

Ipsufacto-a LOW 230

GOOD NIGHT

10001

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE

DIMMABLE


CASAMBI

WIRELESS



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	7W
Lumen Output	500
Connection	230V
Driver	Not required
Dimmable	Phase Dim

CRI	>80
Life Time	L70/B10>20.000 h
Cut-out Size	Ø76 h65mm
Dimensions	Ø82 h53mm
Adjustable	Yes

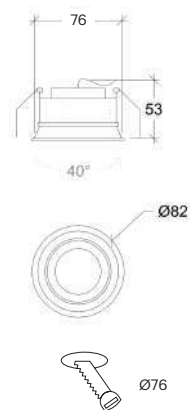

10001.7.**.3.**.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	7	27 2700	3 Wide 38°	○ 10 White	DTR Phase dim
		30 3000		● 20 Black	
		40 4000		● 40 Gold	



PROJECT: OCTAVIO MESTRE ARQUITECTOS

Ipsufacto-a GU10

GOOD NIGHT

10001

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE

DIMMABLE


CASAMBI

WIRELESS



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø76 h125mm
Dimensions	Ø82 h120mm
Adjustable	Yes

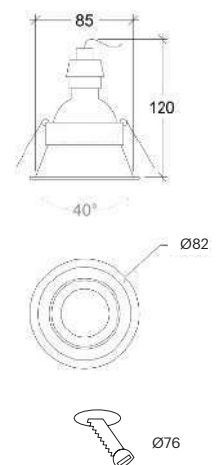

10001.GU10.XX.X.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold 	Depending on lamp



Other finishes upon request

Ipsufacto-a 95 HE

10008

GOOD NIGHT

Recessed




INDOOR RECESSED




Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	Ø85 mm
Driver	Not included	Dimensions	Ø95 mm
Dimmable	ON/OFF, DALI, PUSH (See drivers section)	Adjustable	Yes



Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø95 h99mm
Cut-out Size	Ø85 h109mm

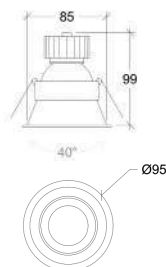

Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø95 h126mm
Cut-out Size	Ø85 h136mm

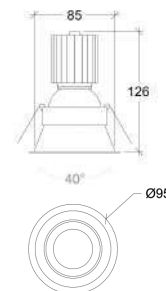


10008.*.**.*.*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°		
		4 Superwide 61°			




10001.A.20.99 Spread lens

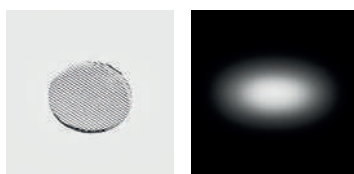

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

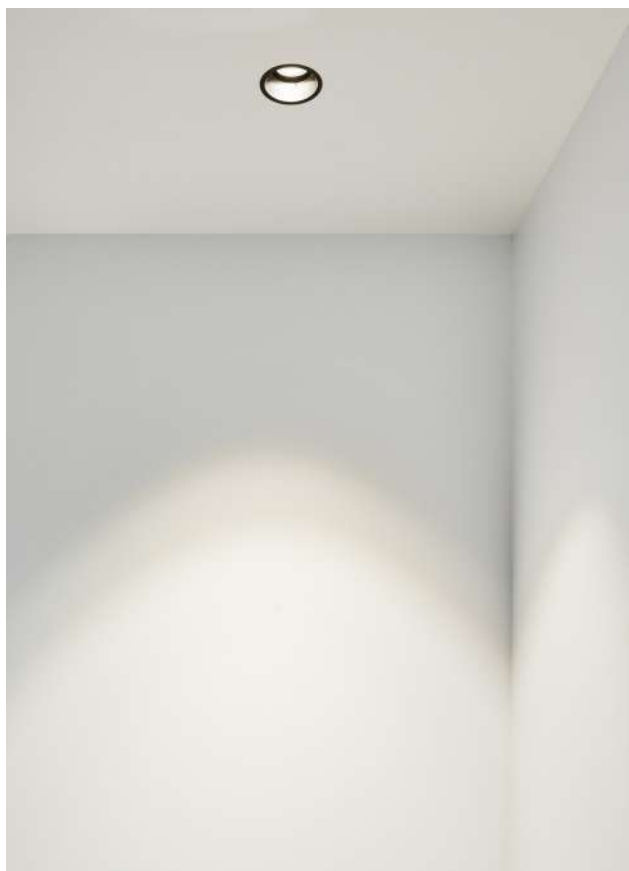

Ipsufacto-a 95 T230

10008

GOOD NIGHT

Recessed




INDOOR RECESSED



ALEXA, SIRI, GOOGLE DIMMABLE CASAMBI WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10>25.000 h
IP	20	Cut-out Size	Ø85 h145mm
Wattage	10W	Dimensions	Ø95 h128mm
Lumen Output	760	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		

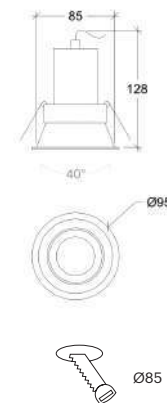


10008.10.**.***.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	10	27 2700	1 Narrow 12°	<input type="radio"/> 10 White	DTR Phase dim
		30 3000	2 Medium 24°	<input checked="" type="radio"/> 20 Black	
		40 4000	3 Wide 36°		



10001.A.20.99 Spread lens

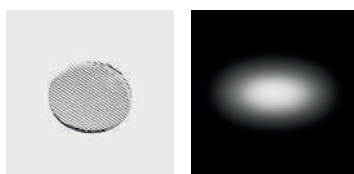

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA

Ipsufacto-a 95 LOW 230V

10008

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI




WIRELESS

Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	L70/B10>20.000 h
IP	20	Cut-out Size	Ø85 h72mm
Wattage	7W	Dimensions	Ø95 h64mm
Lumen Output	500	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		

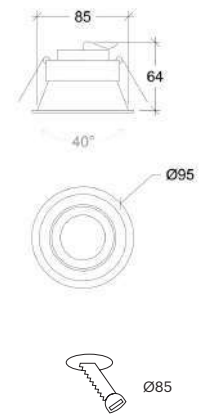


10008.7.**.3.**.DTR.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	7	27 2700	 3 Wide 36°	<input type="radio"/> 10 White	DTR Phase dim
		30 3000		<input checked="" type="radio"/> 20 Black	
		40 4000			



10001.A.20.99 Spread lens

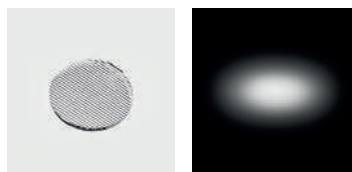

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

Ipsufacto-a 95 GU10

10008

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø85 h125mm
Dimensions	Ø95 h120mm
Adjustable	Yes

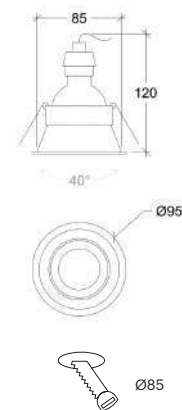


10008.GU10.XX.XX.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	GU10	XX Depending on lamp	XX Depending on lamp	<input type="radio"/> 10 White <input checked="" type="radio"/> 20 Black	Depending on lamp

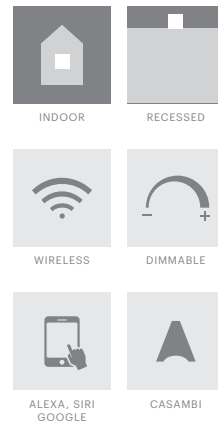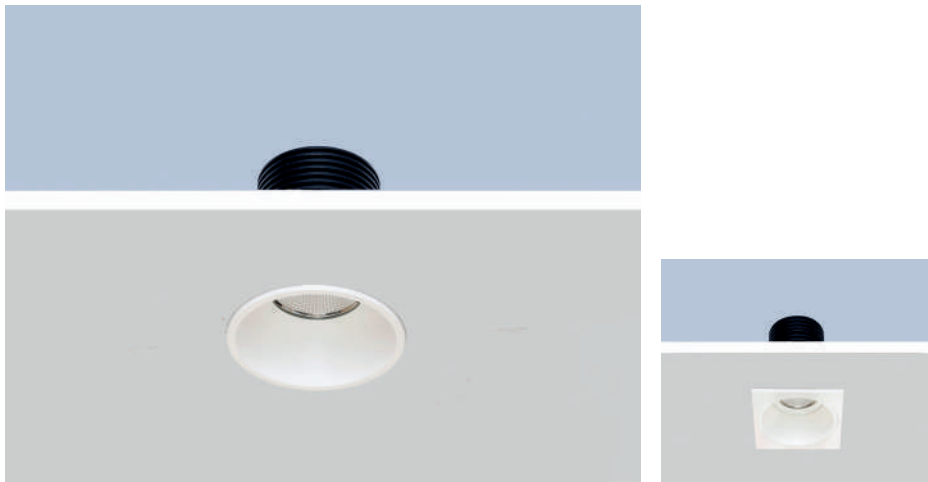


Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	35.000 h
IP	65	Cut-out Size	Ø76 h112mm
Wattage	11W 15W	Dimensions	Ø82 h102mm
Lumen Output	820 1200	Adjustable	No
Connection	500mA / 350mA		
Driver	Included remote 8-24V (500mA) 20-39V (350mA)		
Dimmable*	Included remote ON/OFF, DALI, PUSH (See drivers section)		

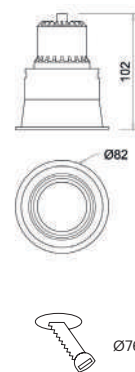


70002.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70002	11	27 2700	1 Narrow 20°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	15	30 3000	2 Medium 40°	● 20 Black	
			4 Superwide 60°		



10001.A.11.10 Square frame-1

○ White

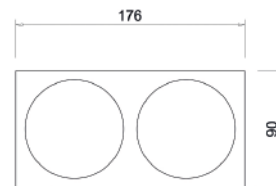

10001.A.12.10 Square frame-2

○ White



YERSE



PROJECT: OCTAVIO MESTRE ARQUITECTOS

Ipsufacto-IP 82 HE

70002

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI



WIRELESS

Installation	Indoor	CRI	>90	
Mounting Position	Ceiling recessed	Life Time	L80/B10 >55.000 h	
IP	44	Cut-out Size	Ø82 mm	
Driver	Not included	Adjustable	Yes	
Dimmable	ON/OFF, DALI, PUSH (See drivers section)			

Wattage	5W		Wattage	8,6W	
Lumen Output	750		Lumen Output	1200	
Connection	150mA		Connection	250mA	
Dimensions	Ø82 h88mm		Dimensions	Ø82 h115mm	
Cut-out size	Ø78 h105mm		Cut-out size	Ø78 h125mm	

70002.*.**.*.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70002	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°	● 40 Gold	
		4 Superwide 61°			




PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA




Installation	Indoor	
Mounting Position	Ceiling recessed	
IP	20	
Wattage	11W	15W
Lumen Output	820	1200
Connection	250mA	350mA
Driver	Included remote	
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)	

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø72 h100mm
Dimensions	Ø82 h90mm
Adjustable	No

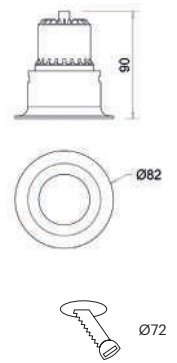

10001.A.20.99 Spread lens

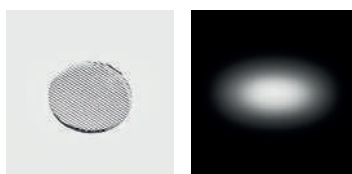




10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre


Recessed

10004.**.**.*.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10004	11	27 2700	 1 Narrow 20°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	15	30 3000	 2 Medium 40°		
			 4 Superwide 60°		

10001.A.11.10 Square frame-1
10001.A.12.10 Square frame-2

○ White

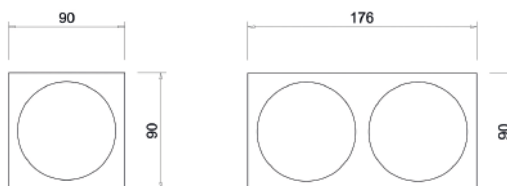

PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Curriculum-f 90 HE

10043

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE




DIMMABLE







CASAMBI







WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	Ø80 mm
Driver	Not included	Adjustable	Yes
Dimmable	ON/OFF, DALI, PUSH (See drivers section)		 Ø80


Wattage	5W		Wattage	8,6W	
Lumen Output	750		Lumen Output	1200	
Connection	150mA		Connection	250mA	
Dimensions	Ø90 h84mm		Dimensions	Ø90 h111mm	
Cut-out size	Ø80 h94mm		Cut-out size	Ø80 h121mm	

10043.*.**.***.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	5	27 2700	 1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	 2 Medium 25°		
		40 4000	 3 Wide 39°		
		 4 Superwide 61°			



10001.A.20.99 Spread lens

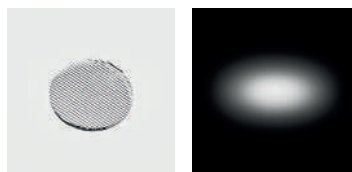

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



PROJECT: ESTUDI ARQUITECTURA INTERIOR MAITE PRATS / PHOTO: MARC TORRA

Curriculum-f 90 T230

GOOD NIGHT

10043

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	10W
Lumen Output	760
Connection	230V
Driver	Not required
Dimmable	Phase Dim

CRI	>90
Life Time	L80/B10>25.000 h
Cut-out Size	Ø80 h130mm
Dimensions	Ø90 h112mm
Adjustable	No

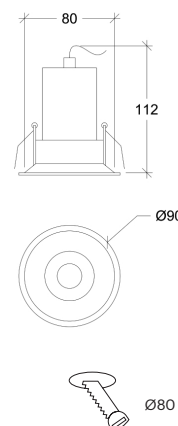


10043.10.**.**.10.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	10	27 2700	1 Narrow 12°	○ 10 White	DTR Phase dim
		30 3000	2 Medium 24°		
			3 Wide 36°		




10001.A.20.99 Spread lens

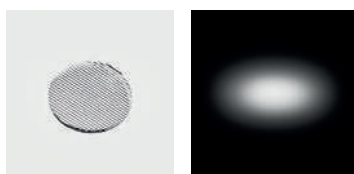

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

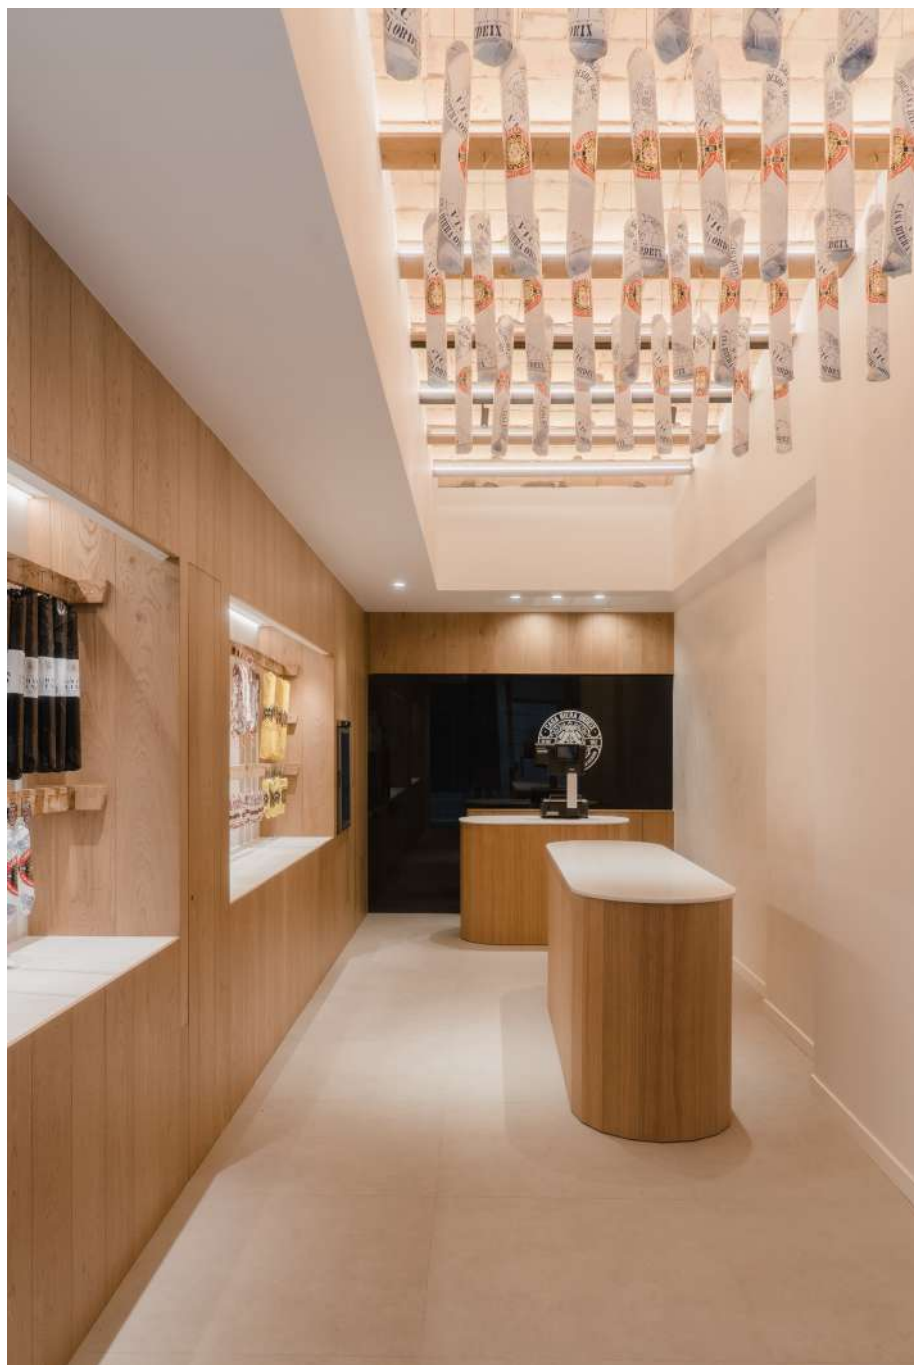

CASA RIERA ORDEIX / PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Curriculum-f 90 LOW 230

GOOD NIGHT

10043

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	7W
Lumen Output	500
Connection	230V
Driver	Not required
Dimmable	Phase Dim

CRI	>80
Life Time	L70/B10>20.000 h
Cut-out Size	Ø80 h55mm
Dimensions	Ø90 h49mm
Adjustable	No




10043.7.**.3.10.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	7	27 2700 30 3000 40 4000	3 Wide 38°	○ 10 White	DTR Phase dim



10001.A.20.99 Spread lens

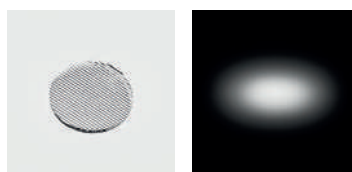

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Curriculum-f 90 GU10

GOOD NIGHT

10043

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø80 h109mm
Dimensions	Ø90 h105mm
Adjustable	No



10043.GU10.X.XX.10.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	GU10	XX Depending on lamp	XX Depending on lamp	○ 10 White	Depending on lamp




PROJECT: OCTAVIO MESTRE ARQUITECTOS




Installation	Indoor	
Mounting Position	Ceiling recessed	
IP	20	
Wattage	11W	15W
Lumen Output	820	1200
Connection	250mA	350mA
Driver	Included remote	
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)	

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø90 h102mm
Dimensions	Ø104 h92mm
Adjustable	+/- 20°

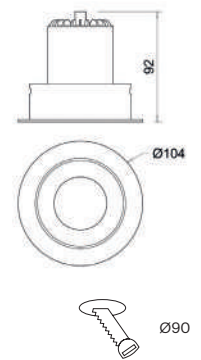

10001.A.20.99 Spread lens

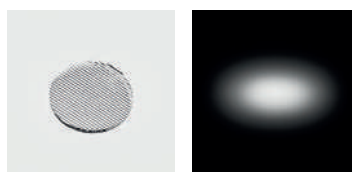




10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

Recessed

10005.**.**.*.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10005	11	27 2700	 1 Narrow 20°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	15	30 3000	 2 Medium 40°		
			 4 Superwide 60°		

10005.GU10.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish
10005	GU10 (230V. lamp not included)	XX	X	○ 10 White



Available SORAA lamps



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



RESTAURANT ARRÓS I PEIX / PROJECT: SANDRA SOLER STUDIO / PHOTO: MERITXELL ARJALAGUER

Suffixus HE

10013

GOOD NIGHT

Recessed



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI



WIRELESS




Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)


CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø62 mm
Adjustable	No



Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø68 h91mm
Cut-out size	Ø62 h101mm

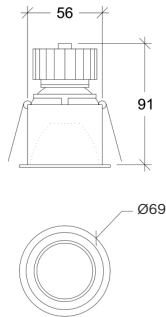

Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø69 h118mm
Cut-out size	Ø62 h126mm

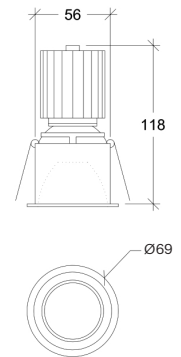

10013.*.**.*.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	5	27 2700	1 Narrow 15°	⊙ 11 White & White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	⊙ 14 White & Gold	
		40 4000	3 Wide 39°	⊙ 22 Black & Black	
			4 Superwide 61°	⊙ 24 Black & Gold	



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



Suffixus T230

10013

GOOD NIGHT

Recessed



INDOOR RECESSED




ALEXA, SIRI
GOOGLE


DIMMABLE

CASAMBI

WIRELESS

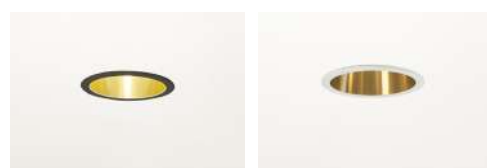

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10>25.000 h
IP	20	Cut-out Size	Ø62 h130mm
Wattage	10W	Dimensions	Ø68 h121mm
Lumen Output	760	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		



10013.10.**.*.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black	
			● 24 Black & Gold		



RESIDENCIA MAS ANGLI / PROJECT: NORA BATLLE



Suffixus LOW 230

10013

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE

CASAMBI

WIRELESS




Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	L70/B10>20.000 h
IP	20	Cut-out Size	Ø62 h71mm
Wattage	7W	Dimensions	Ø68 h61mm
Lumen Output	500	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		



10013.7.**.3.**.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	7	27 2700	3 Wide 36°	⊙ 11 White & White	DTR Phase dim
		30 3000		● 14 White & Gold	
		40 4000		⦿ 22 Black & Black	
				● 24 Black & Gold	

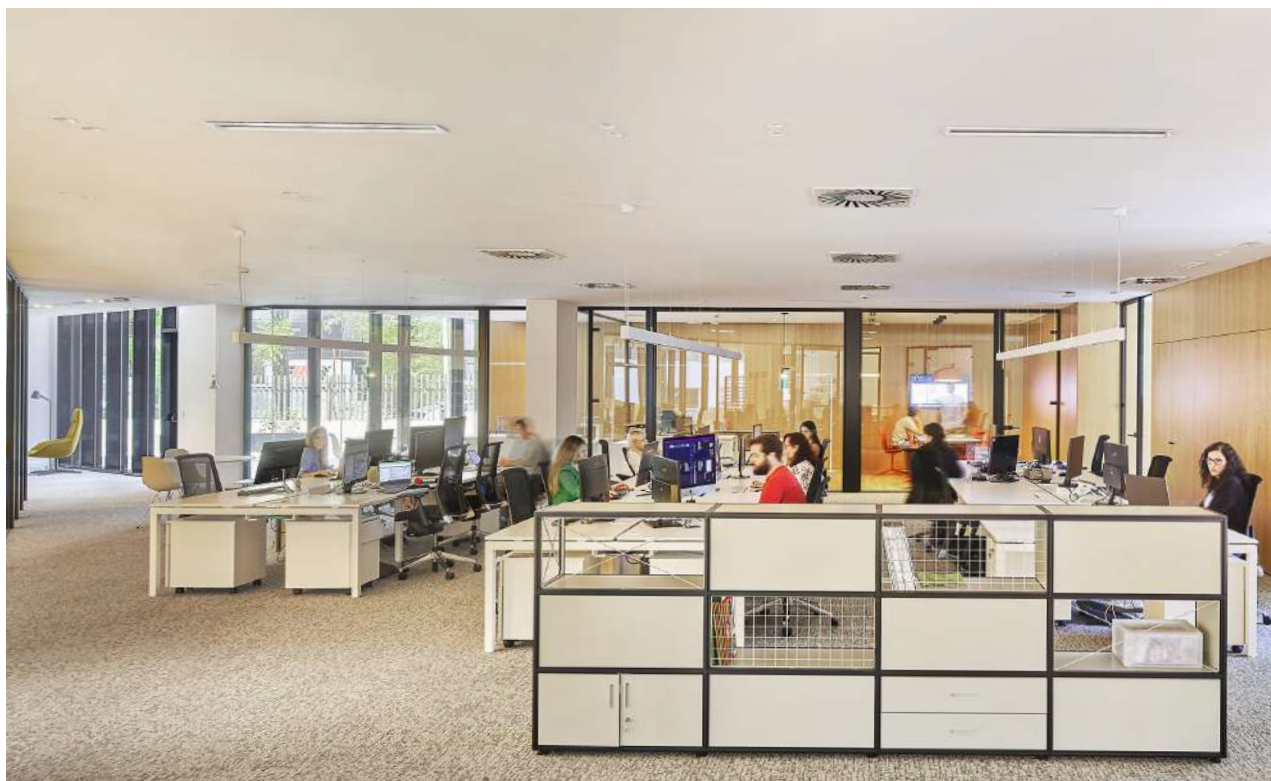

MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA



Suffixus GU10

10013

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI





WIRELESS



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø62 h120 mm
Dimensions	Ø68 h111 mm
Adjustable	No



10013.GU10.XX.X.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ⦿ 11 White & White ⦿ 14 White & Gold ⦿ 22 Black & Black ⦿ 24 Black & Gold 	Depending on lamp



PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: MARC TORRA



Marcus HE

10012

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI



WIRELESS



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø65mm
Adjustable	Yes





Ø65

Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø72 h71mm
Cut-out size	Ø65 h81mm



Ø72

Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø72 h98mm
Cut-out size	Ø65 h110mm



Ø72

10012.*.**.*.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°	● 40 Gold	
		4 Superwide 61°			



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCE GOST



Marcus T230

10012

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10>25.000 h
IP	20	Cut-out Size	Ø65 h125mm
Wattage	10W	Dimensions	Ø72 h100mm
Lumen Output	760	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		



10012.10.**.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	10	27 2700	1 Narrow 12°	○ 10 White	DTR Phase dim
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 40 Gold	



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



Marcus LOW 230

10012

GOOD NIGHT

Recessed



INDOOR RECESSED





ALEXA, SIRI
GOOGLE

DIMMABLE


CASAMBI

WIRELESS

Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	L70/B10>20.000 h
IP	20	Cut-out Size	Ø65 h50mm
Wattage	7W	Dimensions	Ø72 h41mm
Lumen Output	500	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		



10012.7.**.3.**.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	7	27 2700	 3 Wide 38°	○ 10 White	DTR Phase dim
		30 3000		● 20 Black	
		40 4000		● 40 Gold	



RESIDENCIA MAS ANGLI / PROJECT: NORA BATLLE



Marcus GU10

10012

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø65 h95mm
Dimensions	Ø72 h92mm
Adjustable	No



10012.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold 	Depending on lamp



SON BRULL / PROJECT: FORTEZA + APARICIO / PHOTO: ART SÁNCHEZ



Obliquo HE

10009

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)


CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out size	Ø62 mm
Adjustable	No



Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø68 h61mm
Cut-out size	Ø62 h73mm

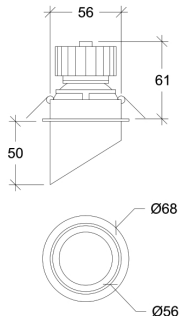

Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø68 h88mm
Cut-out size	Ø62 h100mm

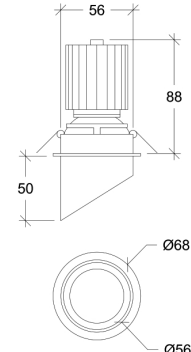

10009.*.*.*.*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	5	27 2700	1 Narrow 15°	11 White & White	XXX Driver not included built-in
	9	30 3000	2 Medium 25°	14 White & Gold	
		40 4000	3 Wide 39°	22 Black & Black	
	4 Superwide 61°	24 Black & Gold			



EL CROSANET / PROJECT: SANDRA SOLER STUDIO

Obliquo T230

10009

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10>25.000 h
IP	20	Cut-out Size	Ø62 h100mm
Wattage	10W	Dimensions	Ø68 h90mm
Lumen Output	760	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		

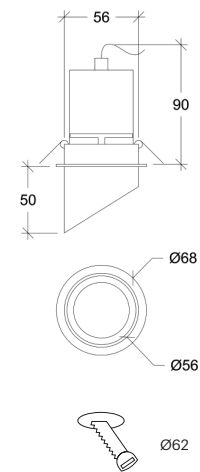

10009.10.**.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black	
				● 24 Black & Gold	

Obliquo LOW 230

10009

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI








WIRELESS

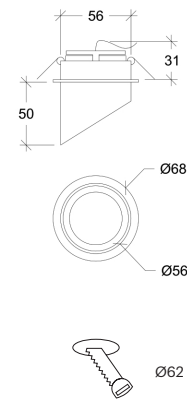Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	7W
Lumen Output	500
Connection	230V
Driver	Not required
Dimmable	Phase Dim

CRI	>80
Life Time	L70/B10>20.000 h
Cut-out Size	Ø62 h35mm
Dimensions	Ø68 h31mm
Adjustable	No



10009.7.**.3.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	7	27 2700	 3 Wide 38°	 11 White & White	DTR Phase dim
		30 3000		 14 White & Gold	
		40 4000		 22 Black & Black	
		 24 Black & Gold			



Obliquo GU10

10009

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø62 h86mm
Dimensions	Ø68 h82mm
Adjustable	No

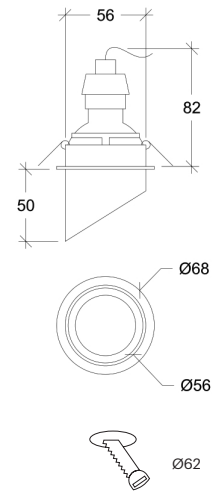

10009.GU10.XX.X.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	GU10	XX Depending on lamp	XX Depending on lamp	⊙ 11 White & White	Depending on lamp
				⊙ 14 White & Gold	
				⊙ 22 Black & Black	
				⊙ 24 Black & Gold	





Pendo HE

10010

GOOD NIGHT

Recessed





Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)



CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out size	Ø62 mm
Adjustable	No



Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø68 h61mm
Cut-out size	Ø62 h71mm



Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø68 h88mm
Cut-out size	Ø62 h98mm



10010.**.***.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	5	27 2700	1 Narrow 15°	⊙ 11 White & White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	⊙ 14 White & Gold	
		40 4000	3 Wide 39°	⊙ 22 Black & Black	
			4 Superwide 61°	⊙ 24 Black & Gold	

Pendo T230

10010

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10>25.000 h
IP	20	Cut-out Size	Ø62 h100mm
Wattage	10W	Dimensions	Ø68 h90mm
Lumen Output	760	Adjustable	No
Connection	230V		
Driver	Not included		
Dimmable	Phase Dim		



10010.10.**.*.**.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black	
			● 24 Black & Gold		



Pendo LOW 230

10010

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	L70/B10>20.000 h
IP	20	Cut-out Size	Ø62 h40mm
Wattage	7W	Dimensions	Ø68 h31mm
Lumen Output	500	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		



10010.7.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	7	27 2700	3 Wide 38°	⊙ 11 White & White	DTR Phase dim
		30 3000		⊙ 14 White & Gold	
		40 4000		⊙ 22 Black & Black	
				⊙ 24 Black & Gold	



Pendo GU10

10010

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø62 h92mm
Dimensions	Ø68 h82mm
Adjustable	No



10010.GU10.XX.X.**.

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ⊙ 11 White & White ⦿ 14 White & Gold ⦿ 22 Black & Black ⦿ 24 Black & Gold 	Depending on lamp



Balnearis

10007

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø75 h80mm
Wattage	12W	Dimensions	Ø85 h70mm
Lumen Output	900	Adjustable	No
Connection	300mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10007.12.**.5.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10007	12	27 2700 30 3000	5 Asymetric 50°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request





INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø56 h105mm
Wattage	8W	Dimensions	Ø60 h95mm
Lumen Output	600	Adjustable	No
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10011.8.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10011	8	27 2700	1 Narrow 15°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°	● 20 Black	
			3 Wide 36°		



GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø56 h93mm
Wattage	8W	Dimensions	Ø60 h83mm
Lumen Output	600	Adjustable	No
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10014.8.**.*10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10014	8	27 2700	1 Narrow 15°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°		
			3 Wide 36°		



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø56 h93mm
Wattage	8W	Dimensions	Ø60 h83mm
Lumen Output	600	Adjustable	+/- 15°
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10015.8.**.*10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10015	8	27 2700	1 Narrow 15°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°		
			3 Wide 36°		

Deminutus


10019

GOOD NIGHT






Recessed

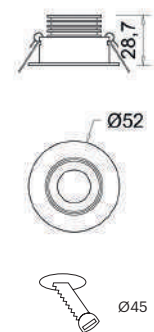


Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø45 h39mm
Wattage	3W	Dimensions	Ø52 h29mm
Lumen Output	140	Adjustable	+/- 25°
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10019.3.30.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10019	3	30 3000	<ul style="list-style-type: none">  1 Narrow 10°  2 Medium 25°  3 Wide 45° 	<ul style="list-style-type: none">  10 White  20 Black 	<p>NDI* Driver included (non-dimmable) Dimmable driver upon request</p>

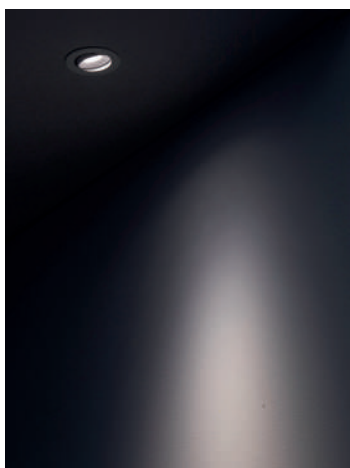

Nolitus

10059

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L70/B10 >50.000 h
IP	20	Cut-out Size	Ø63 h100mm
Wattage	6,1W	Dimensions	Ø68 h94mm
Lumen Output	635	Adjustable	No
Connection	350mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)		



10059.6.**.2.20.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10059	6	27 2700	2 Medium 40°	○ 10 White ● 20 Black ● 30 Aluminium ● 40 Gold ● 80 Copper	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000			
Other finishes available upon request					

Parvus R

10016

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	6,1W
Lumen Output	635
Connection	350mA
Driver	Not included
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø62 h75mm
Dimensions	Ø70 h63mm
Adjustable	No



10016.6. **.3.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10016	6	27 2700 30 3000	3 Wide 40°	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium ● 40 Gold ● 80 Copper <p>Other finishes available upon request</p>	XXX Driver not included (See drivers section)

Parvus Q

10017

GOOD NIGHT

Recessed





INDOOR RECESSED



ALEXA, SIRI GOOGLE DIMMABLE CASAMBI WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	50x50 h68mm
Wattage	6,1W	Dimensions	54x54 h58mm
Lumen Output	635	Adjustable	No
Connection	350mA		
Driver	Not included		
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)		



10016.6. **.3.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10017	6	27 2700 30 3000	3 Wide 40°	<ul style="list-style-type: none"> 10 White 20 Black 30 Aluminium 40 Gold B0 Copper <p>Other finishes available upon request</p>	XXX Driver not included (See drivers section)

Mini Parvus

10070

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Recessed only for wood ceiling	Life Time	L90/B20 >50.000 h
IP	20	Cut-out Size	Ø40 h62mm
Wattage	3,3W	Dimensions	Ø45 h52mm
Lumen Output	440	Adjustable	No
Connection	100mA		
Driver	Not included		
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)		



NOTE: The driver does not fit through the fixture hole

10070.3.**.2.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10070	3	27 2700 30 3000	2 Medium 40°	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium ● 40 Gold ● B0 Copper 	XXX Driver not included (See drivers section)

Mini Parvus Wood


10060

GOOD NIGHT

Recessed




Only for installation in wood

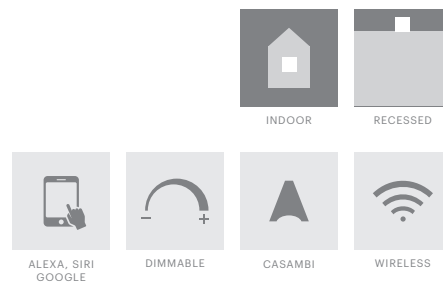

Installation	Indoor
Mounting Position	Recessed only for wood ceiling
IP	20
Wattage	3,3W
Lumen Output	440
Connection	100mA
Driver	Not included
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	L90/B20 >50.000 h
Cut-out Size	Ø33 h45mm
Dimensions	Ø36 h42mm
Adjustable	No

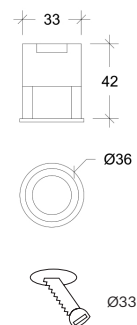

NOTE: The driver does not fit through the fixture hole

10060.3.**.2.20.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10060	3	27 2700 30 3000	2 Medium 40°	● 20 Black	XXX Driver not included (See drivers section)

Honoris

10203

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	35.000 h
IP	20	Cut-out Size	Ø83 h110mm
Wattage	9.3W	Dimensions	Ø90 h100mm
Lumen Output	870	Adjustable	+/- 20°
Connection	500mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		

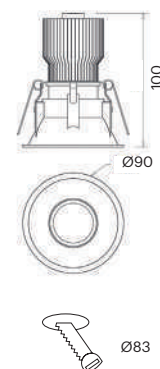

10203.9.27.*,**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10203	9	27 2700	1 Narrow 24°	⊙ 11 White & White	NDI* Driver included (non-dimmable) Dimmable driver upon request
			2 Medium 38°	⊙ 14 White & Gold	

Honestus R HE

10023

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI




WIRELESS


Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90	 Ø82
Life Time	L80/B10>25.000 h	
Cut-out size	Ø82mm	
Adjustable	Yes	



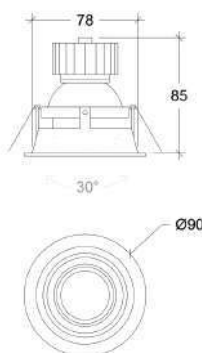

Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø90 h85mm
Cut-out size	Ø82 h105mm

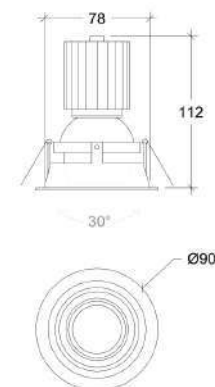

Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø90 h112mm
Cut-out size	Ø82 h122mm



10023.**.**.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10023	5	27 2700	 1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	 2 Medium 25°	● 20 Black	
		40 4000	 3 Wide 39°		
		 4 Superwide 61°			


Honestus Q HE

10024

GOOD NIGHT





Recessed



Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	L80/B10>25.000 h
IP	20	Cut-out size	80x80 mm
Driver	Not included	Adjustable	Yes
Dimmable	ON/OFF, DALI, PUSH (See drivers section)		 80x80

Wattage	5W	Wattage	8,6W
Lumen Output	750	Lumen Output	1200
Connection	150mA	Connection	250mA
Dimensions	90x90 h85mm	Dimensions	90x90 h112mm
Cut-out size	80x80 h95mm	Cut-out size	80x80 h122mm

10024.*.**.*.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10024	5	27 2700	 1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	 2 Medium 25°	● 20 Black	
		40 4000	 3 Wide 39°		
		 4 Superwide 61°			

Honestus Q2 HE

10025

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI



WIRELESS





Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)



CRI	>90
Life Time	L80/B10>25.000 h
Cut-out size	165x80 mm
Adjustable	Yes



Wattage	2 x 5W
Lumen Output	2 x 750
Connection	150mA
Dimensions	175x90 h85mm
Cut-out size	165x80 h95mm

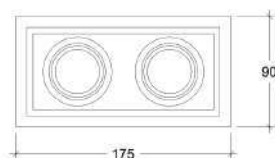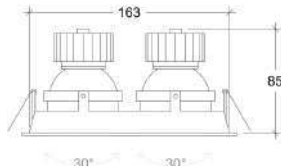

Wattage	2 x 8,6W
Lumen Output	2 x 1200
Connection	250mA
Dimensions	175x90 h112mm
Cut-out size	165x80 h122mm

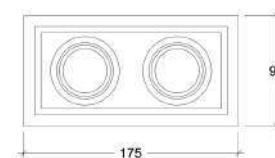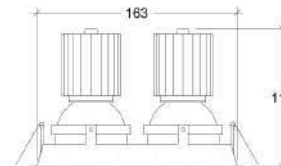

10025.**.*.*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10025	10	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	18	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°		
			4 Superwide 61°		

Cicada HE

10029

GOOD NIGHT

Recessed




INDOOR RECESSED



ALEXA, SIRI, GOOGLE DIMMABLE CASAMBI WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Recessed only for wood ceiling	Life Time	L80/B10>25.000 h
IP	20	Cut-out Size	Ø102 h70mm
Wattage	5W	Dimensions	Ø110 h58mm
Lumen Output	700	Adjustable	Yes
Connection	150mA		
Driver	Not included		
Dimmable	ON/OFF, DALI, PUSH (See drivers section)		

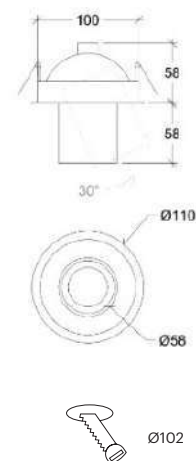

10029.5.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10029	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
		30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°		
			4 Superwide 61°		

GOOD NIGHT

Recessed



Cicada GU10

10029

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø102 h70mm
Dimensions	Ø110 h58mm
Adjustable	Yes

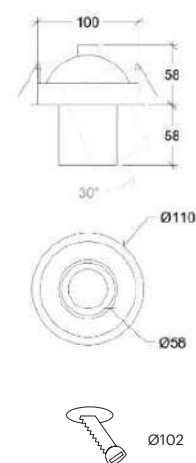


10029.GU10.XX.X.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10029	GU10	XX Depending on lamp	XX Depending on lamp	<input type="radio"/> 10 White <input type="radio"/> 20 Black	Depending on lamp





GOOD NIGHT



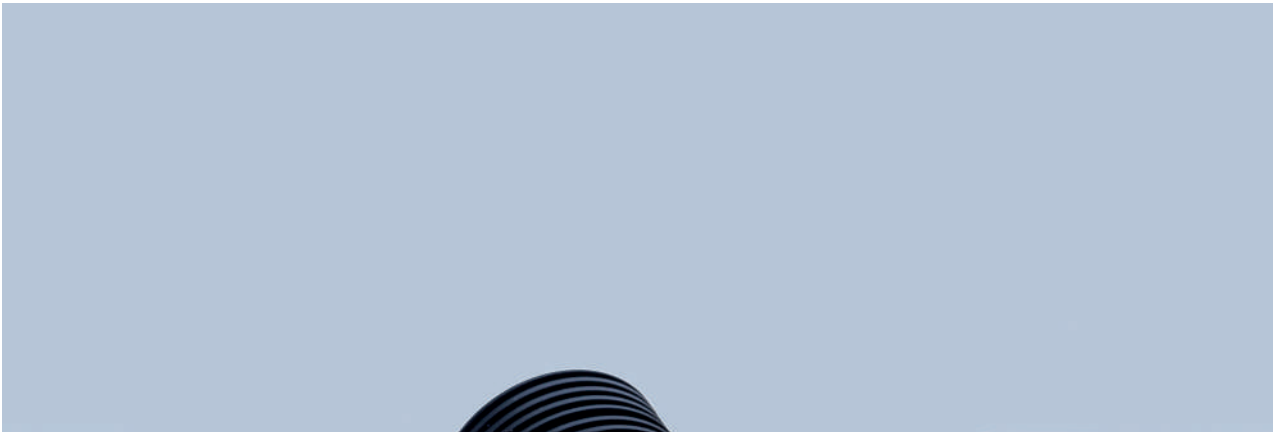
Recessed





Installation Indoor
Installation Description To be combined with LED module & Driver
Mounting Position Ceiling recessed
IP 20

 INDOOR	 RECESSED	 DIMMABLE	 WIRELESS
 ALEXA, SIRI GOOGLE	 CASAMBI	 OTHER COLOUR TEMPERATURES	 SPECIAL LED FOOD AND OTHERS

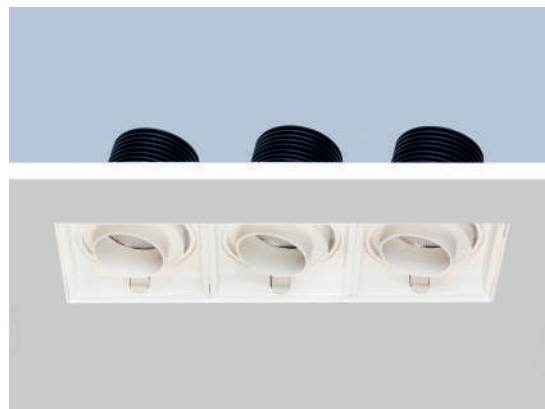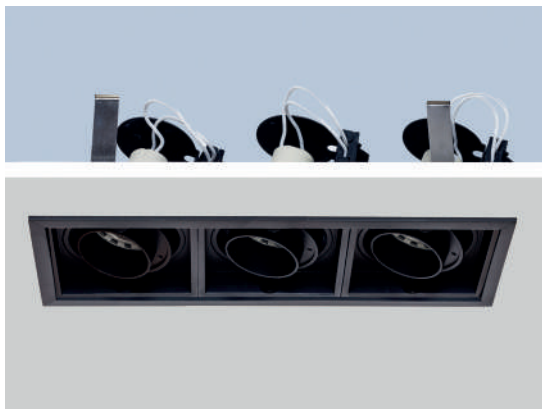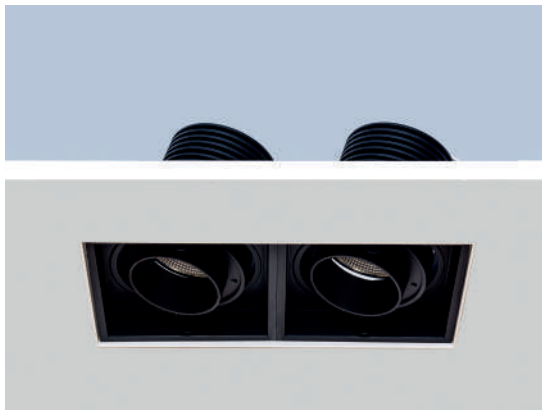


Quadratum-01 Trimless

10301

GOOD NIGHT

Recessed

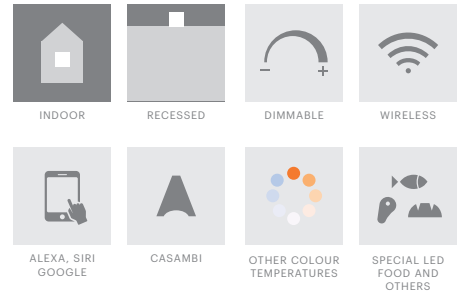


10301.XX.XX.X.**

Cut-out Size 97x97 h105mm
Dimensions 97x97 h95mm
Adjustable +/- 30° 359° Rotation


Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10301	XX	XX	X	☉ 11 White & White ● 22 Black & Black

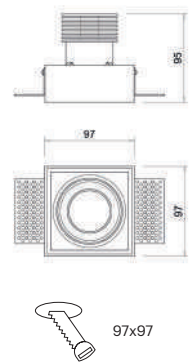

Quadratum-11

10311

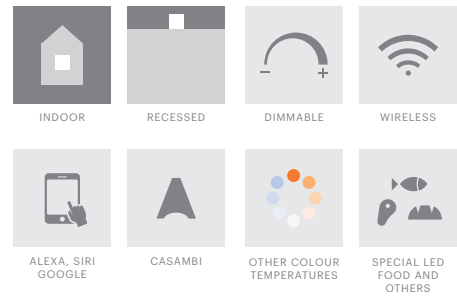


10311.XX.XX.X.**

Cut-out Size 104x97 h105mm
Dimensions 106x106 h95mm
Adjustable +/- 30° 359° Rotation

Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10311	XX	XX	X	☉ 11 White & White ● 22 Black & Black

Led module not included in combination with 1 module


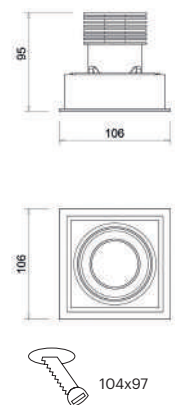


Quadratum-02 Trimless

10302


GOOD NIGHT

Recessed

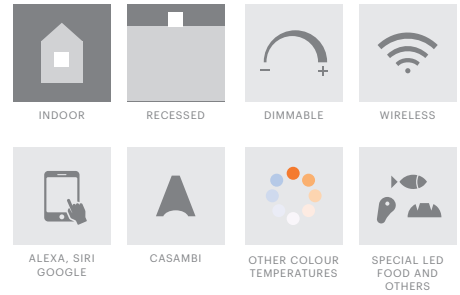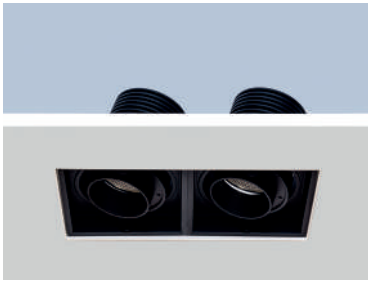


10302.XX.XX.X.**

Cut-out Size 97x189 h105mm
Dimensions 97x189 h95mm
Adjustable +/- 30° 359° Rotation

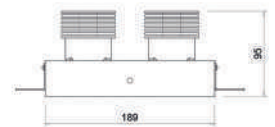


Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10302	XX	XX	X	☉ 11 White & White ● 22 Black & Black

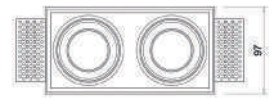

Quadratum-12

10312

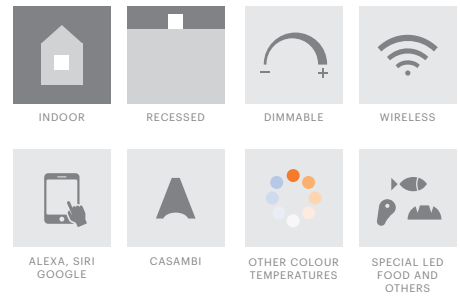


10312.XX.XX.X.**

Cut-out Size 104x191 h105mm
Dimensions 106x199 h95mm
Adjustable +/- 30° 359° Rotation



Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10312	XX	XX	X	☉ 11 White & White ● 22 Black & Black





Led module not included in combination with 2 modules

Quadratum-03 Trimless

10303

GOOD NIGHT

Recessed

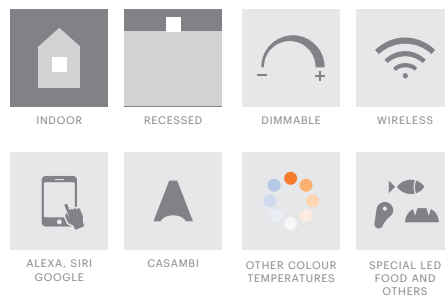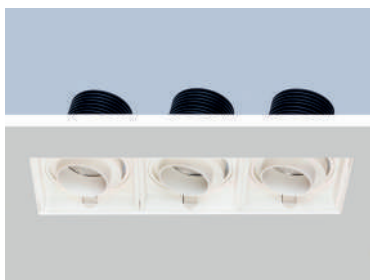


10303.XX.XX.X.**

Cut-out Size 97x282 h105mm
Dimensions 97x282 h95mm
Adjustable +/- 30° 359° Rotation

Luminaire without LED & Driver



Number	W	Colour Temperature	Light Distribution	Finish
10313	XX	XX	X	<input type="radio"/> 11 White & White <input type="radio"/> 22 Black & Black

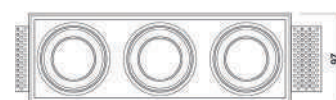

Quadratum-13


10313




10313.XX.XX.X.**

Cut-out Size 104x284 h105mm
Dimensions 106x292 h95mm
Adjustable +/- 30° 359° Rotation

Luminaire without LED & Driver

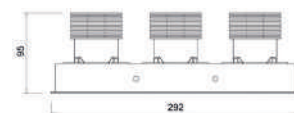




Number	W	Colour Temperature	Light Distribution	Finish
10313	XX	XX	X	<input type="radio"/> 11 White & White <input type="radio"/> 22 Black & Black



Led module not included in combination with 3 modules

60001.**.**.*

LED with Driver

Number	W	Colour Temperature	Light Distribution
60001	11	27 2700	 1 Narrow 20°
	15	30 3000	 2 Medium 40°
			 4 Superwide 60°



Wattage	11W	15W
Lumen Output	820	1200
Connection	500mA	350mA
Driver	Included remote	
Colour Temperature	2700K	3000K
CRI	>90	
Dimmable	ON/OFF, DALI, PUSH (dimmable drivers on request)	

10300.GU10

GU10 adapter for Quadratum




Available SORAA lamps

Compactus-1

10503

GOOD NIGHT

Recessed

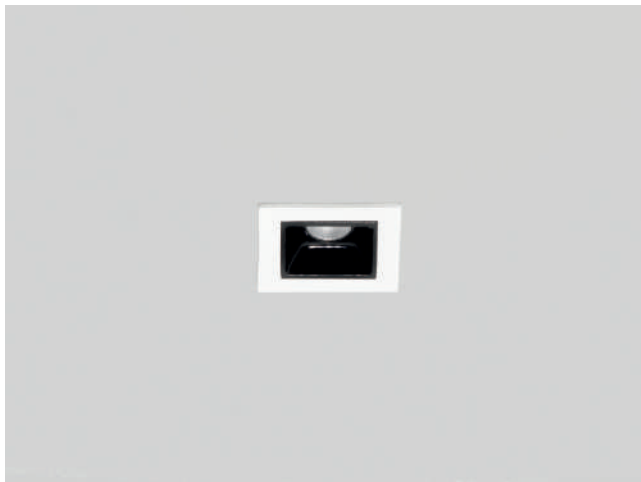

INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI








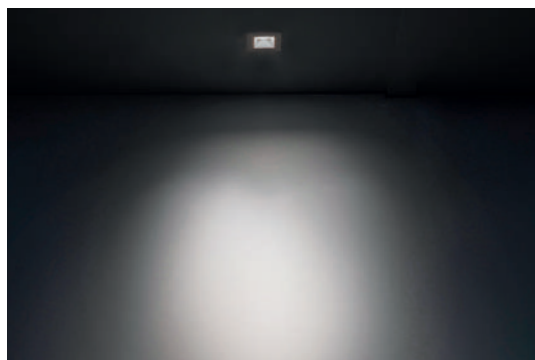
WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	37x37 h42mm
Wattage	3W	Dimensions	45x45 h39mm
Lumen Output	160	Adjustable	No
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10503.3.27.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10503	3	27 2700	<ul style="list-style-type: none">  1 Narrow 15°  2 Medium 30°  3 Wide 45° 	<ul style="list-style-type: none">  11 White & White  12 White & Black 	<p>NDI* Driver included (non-dimmable) Dimmable driver upon request</p>



Compactus-2

10506

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI








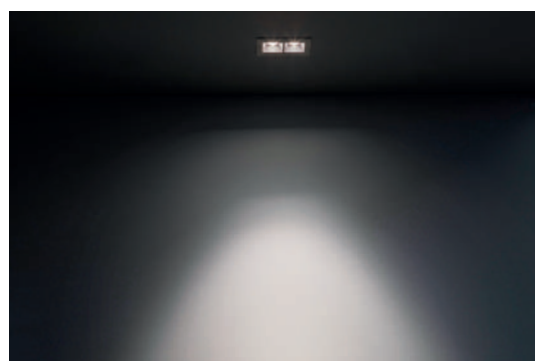
WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	68x37 h42mm
Wattage	6W	Dimensions	75x45 h39mm
Lumen Output	360	Adjustable	No
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10506.6.27.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10506	6	27 2700	<ul style="list-style-type: none">  1 Narrow 15°  2 Medium 30°  3 Wide 45° 	<ul style="list-style-type: none">  11 White & White  12 White & Black 	<p>NDI* Driver included (non-dimmable) Dimmable driver upon request</p>



Compactus-5

10512

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI








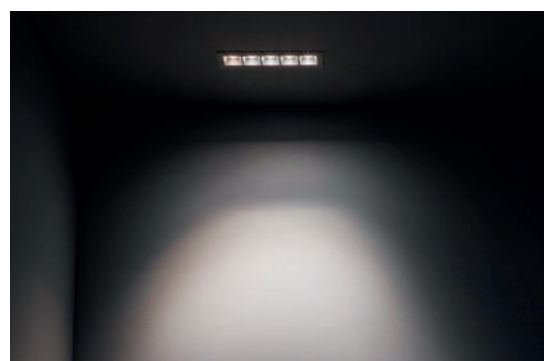
WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	140x37 h42mm
Wattage	12W	Dimensions	148x45 h39mm
Lumen Output	870	Adjustable	No
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10512.12.27.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10512	12	27 2700	<ul style="list-style-type: none">  1 Narrow 15°  2 Medium 30°  3 Wide 45° 	<ul style="list-style-type: none">  11 White & White  12 White & Black 	<p>NDI* Driver included (non-dimmable) Dimmable driver upon request</p>



Compactus-Asy

10612

GOOD NIGHT

Recessed




INDOOR RECESSED



ALEXA, SIRI, GOOGLE DIMMABLE CASAMBI WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	140x37 h46mm
Wattage	12W	Dimensions	148x45 h39mm
Lumen Output	790	Adjustable	No
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmmable drivers on request)		



10612.12.27.5.12

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10612	12	27 2700	5 Asymetric	● 12 White & Black	NDI* Driver included (non-dimmable) Dimmable driver upon request



Incognit GU10

10502

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI






WIRELESS

Gypsum material
Paintable

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	83x83 h135mm
Dimensions	80x80 h131mm Ø55mm
Adjustable	No

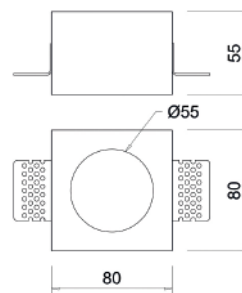

10501.GU10.XX.X.90

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10502	GU10	XX	XX	○ 90 Gypsum	Depending on lamp





PROJECT: ESTUDI ARQUITECTURA INTERIOR MAITE PRATS / PHOTO: MARC TORRA



PROJECT: ESTUDI ARQUITECTURA INTERIOR MAITE PRATS / PHOTO: MARC TORRA

Lenis GU10

10800

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI





WIRELESS



Gypsum material
Paintable

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	125x125 h130mm
Wattage	GU10	Dimensions	120x120 h121mm Ø56mm
Lumen Output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

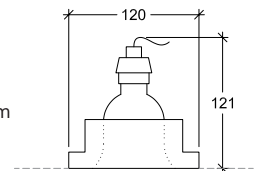

10800.GU10.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10800	GU10	XX	XX	○ 10 White	Depending on lamp



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Big Lenis

10801

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Gypsum material
Paintable

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	30.000 h
IP	20	Cut-out Size	Ø335 h100mm
Wattage	18W	Dimensions	Ø330 h97mm
Lumen Output	1300	Adjustable	No
Connection	230V		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)		

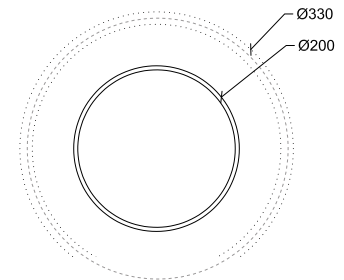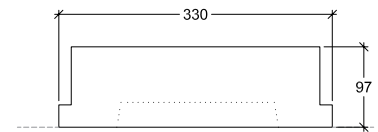

10801.22.30.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10801	22	30 3000	6 Opal 120°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Arus GU10

10022



GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø80-85 h110mm
Dimensions	Ø95 h100mm
Adjustable	Yes



10022.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10022	GU10	XX Depending on lamp	XX Depending on lamp	○ 10 White ● 20 Black	Depending on lamp



MAMS / PROJECT: SANDRA SOLER STUDIO / PHOTO: IVAN RAGA



Big Ipsofacto f

10030

GOOD NIGHT

Recessed




INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE



CASAMBI




WIRELESS



Installation	Indoor
Mounting Position	Ceiling recessed
IP	44
Driver	Included remote
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	40.000 h
Adjustable	No

Wattage	22W
Lumen Output	2100
Connection	500mA
Dimensions	Ø130 h97mm
Cut-out size	Ø120 h105mm

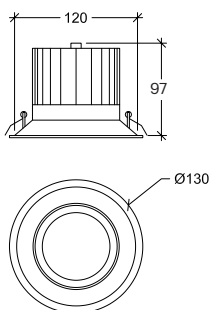

Wattage	30W
Lumen Output	3500
Connection	700mA
Dimensions	Ø160 h130mm
Cut-out size	Ø145 h140mm

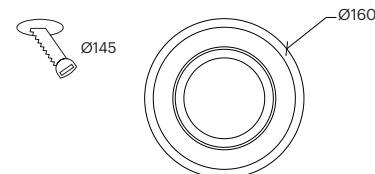

10030.**.*.*.*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10030	22	30 3000	1 Narrow 24°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	30	40 4000	2 Medium 38°	● 20 Black	
		3 Wide 60°	● 40 Gold		



Superavit

10035


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	30W
Lumen output	2500
Connection	800mA
Driver	Included remote
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø126 h130mm
Dimensions	Ø135 h114mm
Adjustable	+/- 30° 358° Rotation

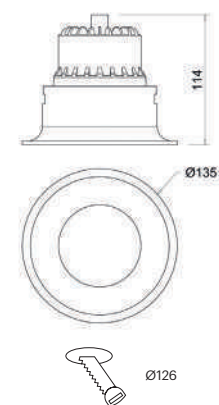

10035.30.**.*10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10035	30	27 2700	2 Medium 25°	○ 10 White	NDI* Included built-in non-dimmable
		30 3000	3 Wide 40°	● 20 Black	
		40 4000			



SIZE / PROJECT: MARTA BACQUELAINE



SIZE / PROJECT: MARTA BACQUELAINE



SIZE / PROJECT: MARTA BACQUELAINE

10110

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	22W
Lumen output	1800
Connection	700mA
Driver	Included remote
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)

CRI	>85
Life Time	30.000 h
Cut-out Size	Ø200 h50mm
Dimensions	Ø210 h36mm
Adjustable	No



10110.22.**.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10035	22	30 3000 40 4000	6 Opal 120°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request

Mergo



10112

GOOD NIGHT


Recessed



Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	30.000 h
IP	20	Cut-out Size	Ø150 h70mm
Wattage	30W	Dimensions	Ø160 h62mm
Lumen output	2400	Adjustable	No
Connection	700mA		
Driver	Included built-in		
Dimmable*	Non-dimmable		



10112.30.**.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10112	30	30 3000 40 4000	 6 Opal 120°	○ 10 White	NDI* Driver included (non-dimmable)

Lacunar Trimless

10114

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Only for gypsum ceiling
Other wattages and dimensions available upon request (30W and 40W)

Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	30.000 h
IP	20	Cut-out Size	Ø300 h98mm
Wattage	20W	Dimensions	Ø286 h88mm
Lumen output	1350	Adjustable	Yes
Connection	700mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)		

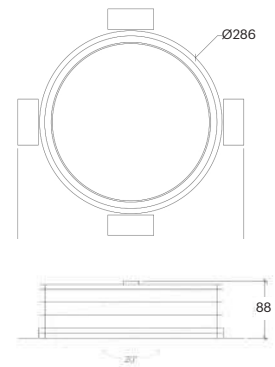

10114.20.**.6.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10114	20	30 3000		○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	

Rotundus-UGR<19

10105

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	25W
Lumen output	2500
Connection	600mA
Driver	Included remote
Dimmable*	ON/OFF, DALI, PUSH (dimmable drivers on request)

CRI	>85
Life Time	40.000 h
Cut-out Size	Ø200 h140mm
Dimensions	Ø215 h120mm
Adjustable	No

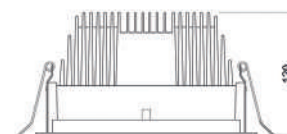

10105.25.**.3.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10105	25	30 3000 40 4000	3 Wide 80°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request





Savanna 60x60 UGR < 19


GOOD NIGHT

10160

Recessed / Surface / Suspended

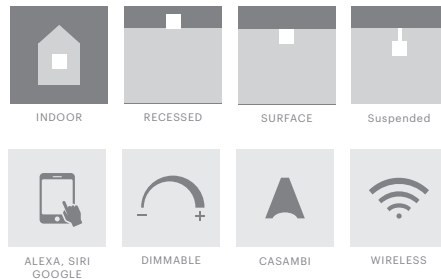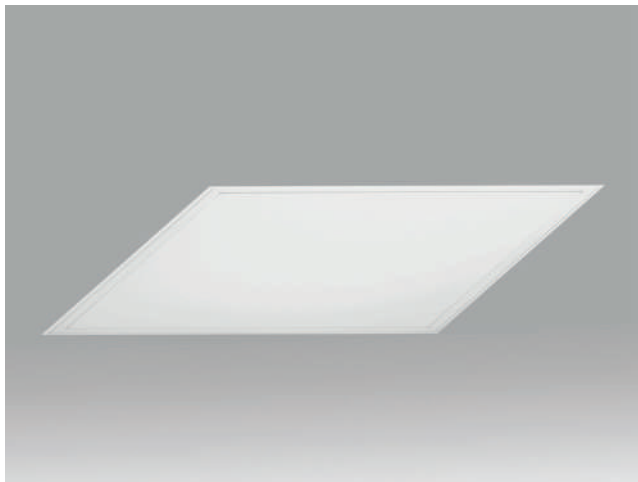

Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	44	Cut-out Size	595x595 h40mm (technical ceiling)
Wattage	36W	Dimensions	595x595 h35mm
Lumen output	3500		
Connection	230V		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)		

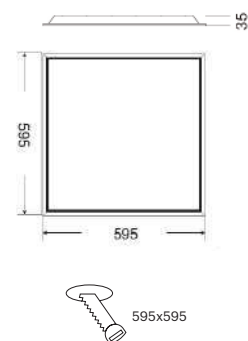

10160.36.**.4.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10160	36	30 3000 40 4000 50 5000	4 Superwide 90°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request

Accessory


- 10160.A.1 Surface mounting kit for Savanna 60x60
- 10160.A.2 Suspended mounting kit
- 10160.A.3 Recessing frame for Savanna 60x60
- 10160.A.4 Recessing brackets for Savanna

Savanna 60x60 Opal


GOOD NIGHT

10160

Recessed / Surface / Suspended

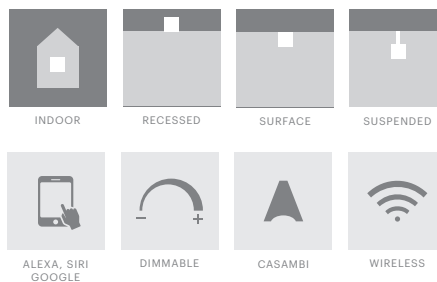

Installation	Indoor	CRI	>80
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	595x595 h40mm (technical ceiling)
Wattage	36W	Dimensions	595x595 h35mm
Lumen output	3250		
Connection	230V		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)		

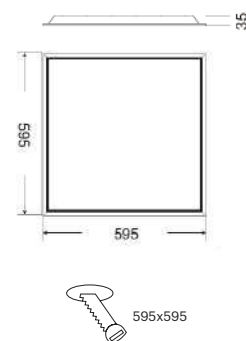

10160.36.**.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10160	36	30 3000 40 4000 50 5000	6 Opal 120°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request

Accessory



- 10160.A.1 Surface mounting kit for Savanna 60x60
- 10160.A.2 Suspended mounting kit
- 10160.A.3 Recessing frame for Savanna 60x60
- 10160.A.4 Recessing brackets for Savanna

Savanna 120x30 Opal

GOOD NIGHT

10162

Recessed / Surface / Suspended

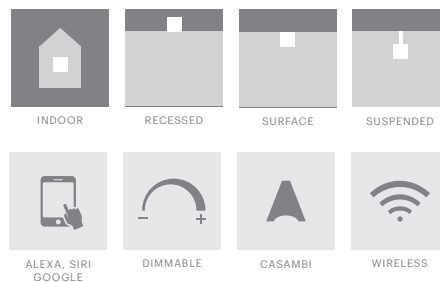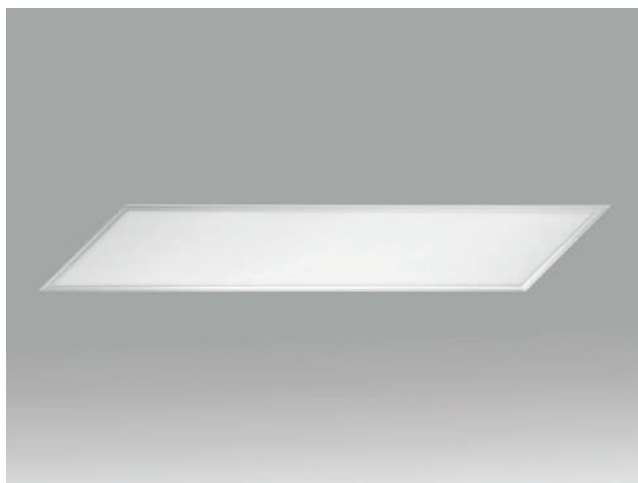

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	36W
Lumen output	3200
Connection	230V
Driver	Included remote
Dimmable*	ON/OFF, DALI, PUSH (See drivers section)

CRI	>80
Life Time	40.000 h
Cut-out Size	295x1195 h40mm (technical ceiling)
Dimensions	295x1195 h35mm



10162.36.**.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10162	36	30 3000	6 Opal 120°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000			
		50 5000			

Accessory

- 10160.A.2 Suspended mounting kit for Savanna
- 10160.A.4 Recessing brackets for Savanna

Eclipsim


10701

GOOD NIGHT



Recessed



Installation	Indoor	CRI	>85
Mounting Position	Wall recessed	Life Time	30.000 h
IP	20	Cut-out Size	Ø40 h57mm
Wattage	3W	Dimensions	Ø44 h47,5mm
Lumen output	130	Adjustable	No
Connection	700mA		
Driver	Included remote		
Dimmable*	Non-dimmable		



10701.3.30.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10701	3	30 3000	 6 Opal	 10 White	NDI* Driver included (non-dimmable)



Praetorium

10713

GOOD NIGHT

Recessed wall



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE




CASAMBI





WIRELESS

Only for cavity wall
Gypsum material
Paintable

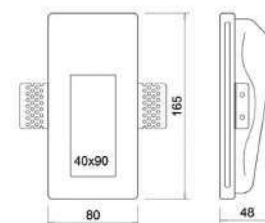Installation	Indoor	CRI	>80
Mounting Position	Wall recessed	Life Time	40.000 h
IP	20	Cut-out Size	169x84 h52mm
Wattage	1W	Dimensions	165x80 h48mm
Lumen output	100	Adjustable	No
Connection	350mA		
Driver	Included remote		
Dimmable*	Non-dimmable		



10713.1.30.5.10


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10713	1	30 3000	 5 Asymetric	 10 White	NDI* Driver included (non-dimmable)

Lacrima

36000


GOOD NIGHT

Recessed wall



Only for cavity wall
Gypsum material
Paintable

Installation	Indoor	CRI	>80
Mounting Position	Wall recessed	Life Time	30.000 h
IP	20	Cut-out Size	320x105 h45mm
Wattage	1W	Dimensions	210x50mm
Lumen output	100	Adjustable	No
Connection	350mA		
Driver	Included remote		
Dimmable*	Non-dimmable		

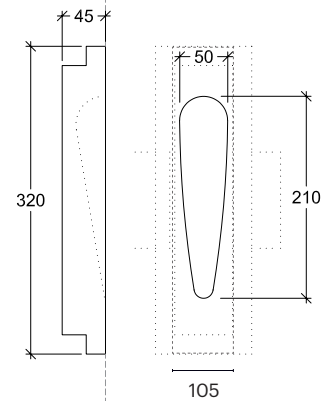

36000.1.30.5.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
36000	1	30 3000	5 Asymetric	○ 10 White	NDI* Driver included (non-dimmable)



Tellus

10705


GOOD NIGHT

Recessed wall




INDOOR RECESSED

Installation	Indoor	CRI	>85
Mounting Position	Wall recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø68 h40mm
Wattage	3W	Dimensions	74x74 h38mm
Lumen output	50	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable		



10705.3.27.5.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10705	3	27 2700	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Scala

75005




GOOD NIGHT

Recessed wall




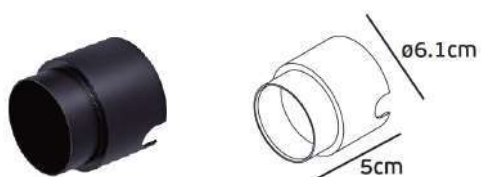
Installation	Indoor / Outdoor
Mounting Position	Wall recessed
IP	20
Wattage	1W
Lumen output	100
Connection	230VA
Driver	Included built-in
Dimmable*	Non-dimmable

CRI	>90
Life Time	20.000 h
Cut-out Size	Ø61 h50mm (with recessing box) Ø50 h30mm (without recessing box)
Dimensions	Ø58 h25mm
Adjustable	No



70005.1.30.5.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70005	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Recessing box included

Oculus


75006

GOOD NIGHT


Recessed wall



Installation	Indoor / Outdoor	CRI	>80
Mounting Position	Wall recessed	Life Time	30.000 h
IP	65	Cut-out Size	Ø75 h38mm
Wattage	2W	Dimensions	Ø80 h38mm
Lumen output	120	Adjustable	No
Connection	230VA		
Driver	Included built-in		
Dimmable*	Non-dimmable		

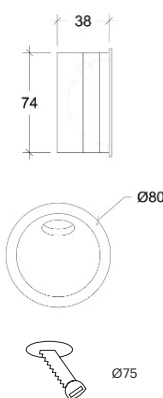

70006.1.30.5.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70006	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Supplied with 200cm cable

Signum

70702


GOOD NIGHT

Recessed wall




Installation	Indoor / Outdoor
Mounting Position	Wall recessed
IP	65
Wattage	1,5W
Lumen output	170
Connection	230VA
Driver	Included built-in
Dimmable*	Non-dimmable

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø68 h71mm
Dimensions	Ø75 h53mm
Adjustable	No

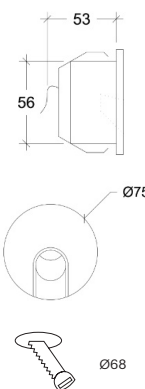

70702.1.**.*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70702	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)



Supplied with 200cm cable
Recessing box included

Surface / Suspended



Surface / Suspended

- 130 Pictus Cylinder suspended
- 131 Fluctus 140 Cylinder Surface
- 132 Fluctus 180 Cylinder Surface
- 133 Fluctus 150 Cylinder Surface GU10
- 134 Fluctus 140 Cylinder Suspended
- 135 Fluctus 180 Cylinder Suspended
- 136 Fluctus 150 Cylinder Suspended GU10
- 138 Aqualis-65
- 139 Aqualis-85
- 140 Audere Cylinder Surface
- 141 Audere cylinder Suspended
- 142 Canalis T230 Surface
- 143 Canalis GU10 Surface
- 144 Canalis T230 Suspended
- 145 Canalis GU10 Suspended
- 146 Speculum
- 148 Buto 35
- 150 Lunis
- 152 Lunis Twin
- 154 Bitubus 100 Surface
- 156 Bitubus 100 Suspended
- 157 QX
- 158 Linestrum 30.1
- 160 Linestrum 30.2
- 161 Linestrum 50.1
- 162 Linestrum 50.2
- 163 Linestrum 100.2
- 164 Porcellanatum Basic
- 165 Porcellanatum Basic Switch
- 166 Purus

Pictus Cylinder Suspended

35077

GOOD NIGHT

Suspended



Standard: surface mounted canopy



INDOOR

SUSPENDED



DIMMABLE




CASAMBI



WIRELESS


Installation	Indoor	CRI	>90
Mounting Position	Suspended	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	5W	Dimensions	Ø35 h120mm
Lumen output	665	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable *Dimmable drivers upon request		

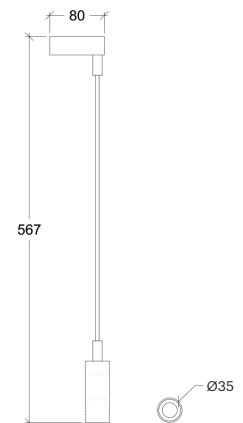

35077.5.**.*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35077	5	27 2700	1 Narrow 12°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 30 Aluminium	
				● 40 Gold	
				● A0 Corten	
				● B0 Copper	

Other finishes available upon request

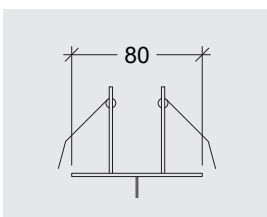


Recessed canopy on request

Fluctus 140 Cylinder Surface

30067


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	5W 8,6W
Lumen output	790 1200
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable


CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	-
Dimensions	Ø56 h140mm
Adjustable	No

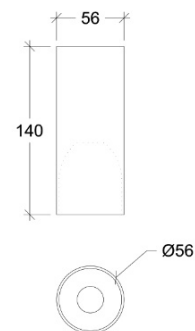

30067.*.*.*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30067	5	27 2700	1 Narrow 14°	○ 10 White	NDI* Driver included (non-dimmable)
		30 3000	2 Medium 25°	● 20 Black	
	9	40 4000	3 Wide 40°	● 30 Aluminium	
			4 Superwide 60°	● 40 Gold	
				● A0 Corten	
				● B0 Copper	

Other finishes available upon request

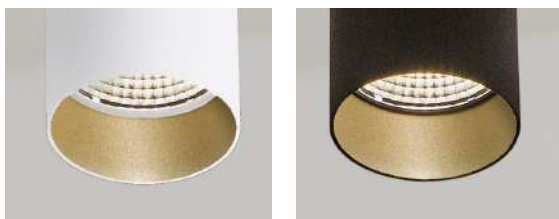


Fluctus 180 Cylinder Surface


30068

GOOD NIGHT

Surface



Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	5W 8,6W	Dimensions	Ø56 h180mm
Lumen output	790 1200	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable	Phase Dim		

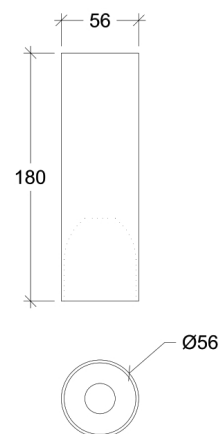

30068.***.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30068	5	27 2700	1 Narrow 14°	10 White	DTR Phase Dim
		30 3000	2 Medium 25°	20 Black	
	9	40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
			A0 Corten		
			B0 Copper		




Other finishes are available upon request for the external body and the internal ring

Fluctus 150 Cylinder Surface GU10

30067


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø56 h153mm
Adjustable	No

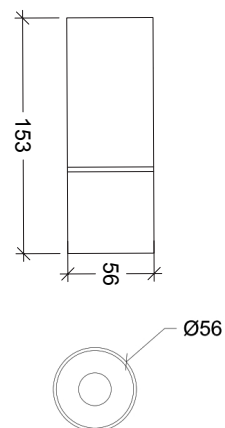

30067.GU10.XX.X.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30067	GU10	XX	X	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium ● 40 Gold ● A0 Corten ● B0 Copper 	Depending on lamp



Other finishes are available upon request for the external body and the internal ring

Fluctus 140 Cylinder Suspended


35067

GOOD NIGHT

Suspended



Installation	Indoor	CRI	>90
Mounting Position	Suspended	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	5W 8,6W	Dimensions	Ø56 h140 mm
Lumen output	700 1200	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable *Dimmable drivers upon request		

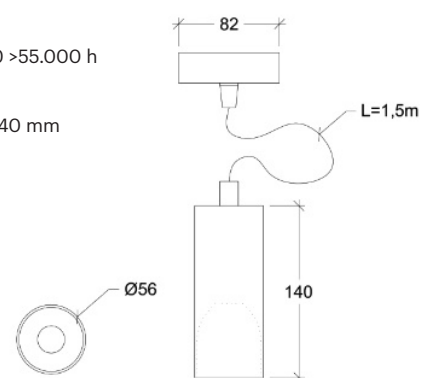


35067.*.*.*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35067	5	27 2700	1 Narrow 14°	○ 10 White	NDI* Driver included (non-dimmable)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	● 30 Aluminium	
			4 Superwide 60°	● 40 Gold	
				● A0 Corten	
				● B0 Copper	



Other finishes are available upon request for the external body and the internal ring

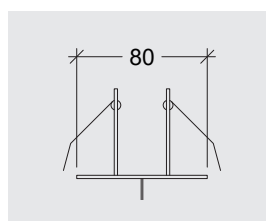

Recessed canopy on request

Fluctus 180 Cylinder Suspended

35068

GOOD NIGHT

Suspended



INDOOR SUSPENDED



DIMMABLE




CASAMBI



WIRELESS


Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	5W 8,6W
Lumen output	700 1200
Connection	230V
Driver	Included built-in
Dimmable	Phase Dim

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	-
Dimensions	Ø56 h180mm
Adjustable	No

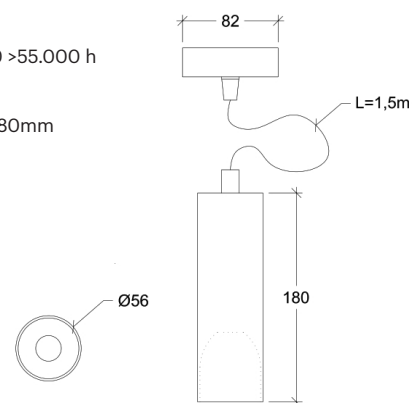


35068.*.*.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35067	5	27 2700	1 Narrow 14°	10 White	DTR
		30 3000	2 Medium 25°	20 Black	
	9	40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
			A0 Corten		
				B0 Copper	

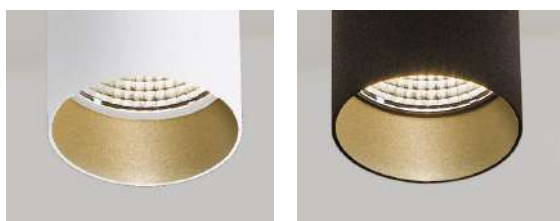

Other finishes are available upon request for the external body and the internal ring

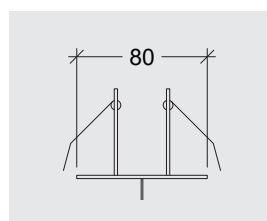

Recessed canopy on request



Fluctus 150 Cylinder Suspended GU10

35067

GOOD NIGHT

Suspended



INDOOR SUSPENDED



DIMMABLE




CASAMBI



WIRELESS


Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø56 h153mm
Adjustable	No

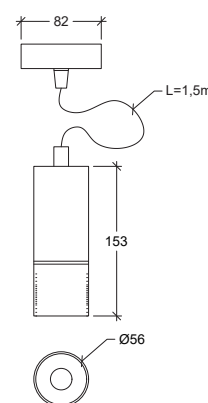


35067.GU10.XX.X.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35067	GU10	XX	X	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium ● 40 Gold ● A0 Corten ● B0 Copper 	Depending on lamp

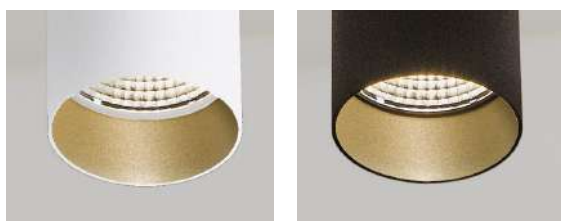

Other finishes are available upon request for the external body and the internal ring

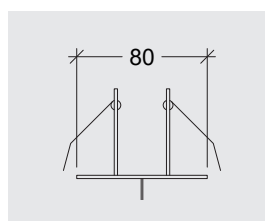

Recessed canopy on request



Suspended



MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA

Aqualis-65

30065

GOOD NIGHT

Surface




Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	8W	Dimensions	Ø65 h157mm
Lumen output	580	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable	Non-dimmable		



30065.8.27.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30065	8	27 2700	1 Narrow 25°	⊙ 11 White & White	NDI Driver included (non-dimmable)
			2 Medium 40°	⊙ 12 White & Black	
			4 Superwide 60°	⊙ 14 White & Gold	
				● 21 Black & White	
				● 22 Black & Black	
				● 24 Black & Gold	

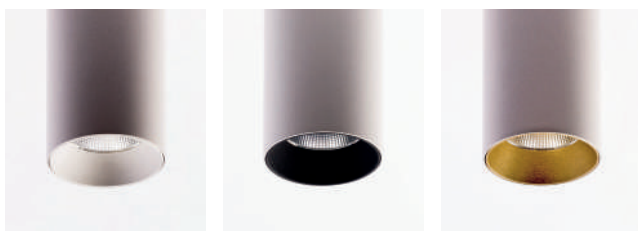


Aqualis-85

30085


GOOD NIGHT

Surface / Suspended




Installation	Indoor
Mounting Position	Surface, Suspended
IP	20
Wattage	20W
Lumen output	1450
Connection	230V
Driver	Included built-in
Dimmable	Non-dimmable

CRI	>90
Life Time	40.000 h
Cut-out Size	-
Dimensions	Ø85 h154mm
Adjustable	No

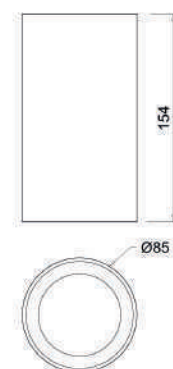

30085.20.30.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30085	20	30 3000	1 Narrow 15°	⊙ 11 White & White	NDI Driver included (non-dimmable)
			2 Medium 25°	⦿ 12 White & Black	
			3 Wide 40°	⦿ 14 White & Gold	
				● 21 Black & White	
				⦿ 22 Black & Black	
				● 24 Black & Gold	

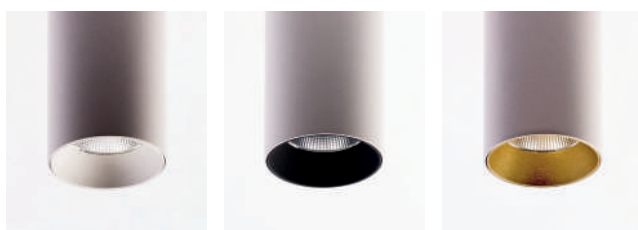


30085.A.2.10 Aqualis-85-Suspended set ○
 30085.A.2.20 Aqualis-85-Suspended set ●

Audere Cylinder Surface


30079

GOOD NIGHT

Surface

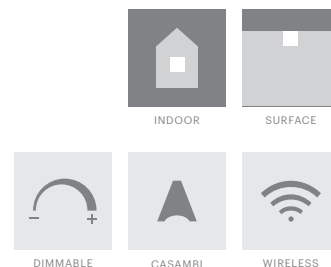

Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	20W	Dimensions	Ø80 h160mm
Lumen output	2600	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable *Dimmable drivers upon request		

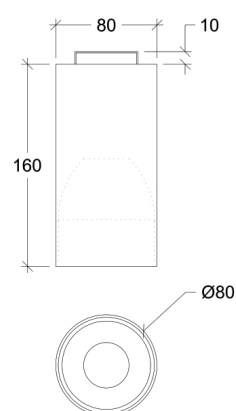

30079.20.**.*.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30079	20	27 2700	1 Narrow 14°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°	20 Black	
		40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
				A0 Corten	
				B0 Copper	



Other finishes are available upon request for the external body and the internal ring

Audere Cylinder Suspended

35079

GOOD NIGHT

Suspended



INDOOR SUSPENDED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	>90
Mounting Position	Suspended	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	20W	Dimensions	Ø80 h160mm
Lumen output	2600	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable *Dimmable drivers upon request		

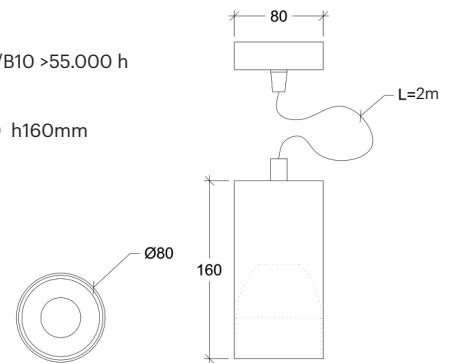


35079.20.**.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35079	20	27 2700	1 Narrow 14°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°	20 Black	
		40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
				A0 Corten	
				B0 Copper	



Other finishes are available upon request for the external body and the internal ring

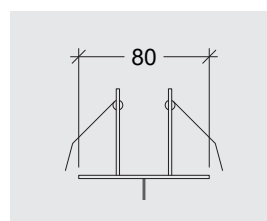

Recessed canopy on request




Canalis T230 Surface


30070

GOOD NIGHT

Surface



Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	L80/B10 >25.000 h
IP	20	Cut-out Size	-
Wattage	10W	Dimensions	Ø90 h140mm
Lumen output	675	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable	Phase Dim		

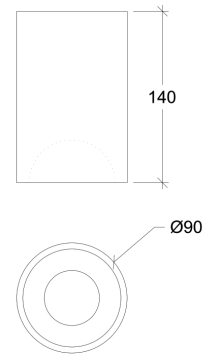

30070.10.**.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30070	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase Dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black	
				● 24 Black & Gold	



Canalis GU10 Surface

30070

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø90 h140mm
Adjustable	No



30070.GU10.XX.X.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30070	GU10	X	X	<ul style="list-style-type: none"> ☉ 11 White & White ☉ 14 White & Gold ● 22 Black & Black ● 24 Black & Gold <p>Other finishes available upon request</p>	Depending on lamp



Canalis T230 Suspended

35070

GOOD NIGHT

Suspended



INDOOR SUSPENDED



DIMMABLE




CASAMBI



WIRELESS


Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	10W
Lumen output	675
Connection	230V
Driver	Included
Dimmable	Phase Dim

CRI	>90
Life Time	L80/B10 >25.000 h
Cut-out Size	-
Dimensions	Ø90 h140mm
Adjustable	No

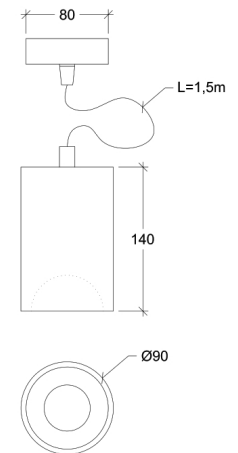

35070.10.**.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35070	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase Dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black ⦿ 24 Black & Gold	
Other finishes available upon request					

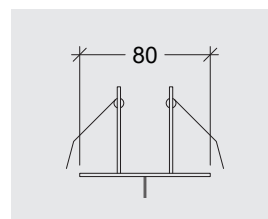

Recessed canopy on request

Canalis GU10 Suspended

35070


GOOD NIGHT

Suspended




Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø90 h140mm
Adjustable	No

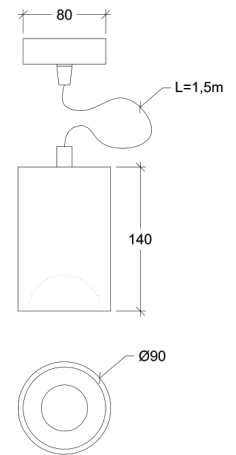

35070.GU10.XX.X.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35070	GU10	X	X	<ul style="list-style-type: none"> ☉ 11 White & White ☉ 14 White & Gold ● 22 Black & Black ● 24 Black & Gold <p>Other finishes available upon request</p>	Depending on lamp

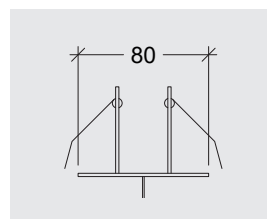

Recessed canopy on request

Speculum

30090

GOOD NIGHT

Surface




Installation	Indoor	CRI	>85
Mounting Position	Surface	Life Time	30.000 h
IP	44	Cut-out Size	-
Wattage	18W	Dimensions	L900 A40 h58mm
Lumen output	1000	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	Non-dimmable		




30090.18.27.6.70


Number	W	Colour Temperature	Light Distribution	Finish	Dim
30090	18	27 2700	6 Opal	70 Chrome	NDI Driver included (non-dimmable) Dimmable driver upon request

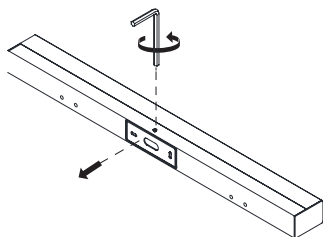

Wall fixation (included)

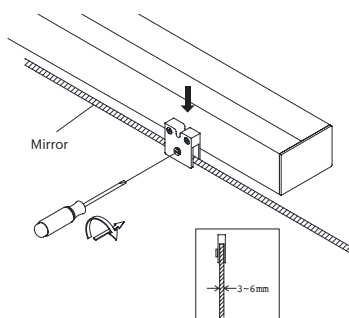

Mirror fixation (included)

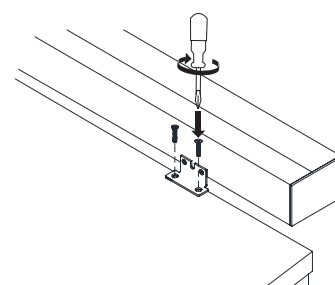

Furniture fixation (included)




PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCÉ GOST PHOTO

Buto 35


30135

GOOD NIGHT

Surface



Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	35.000 h
IP	20	Cut-out Size	-
Wattage	18W	Dimensions	Ø350 h55mm
Lumen output	1600	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable	Phase Dim		

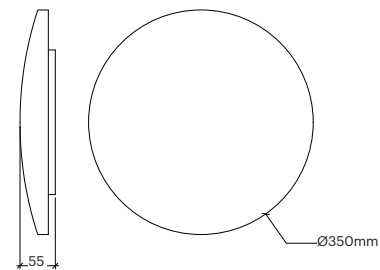

30135.18.**.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30135	18	30 3000	6 Opal	10 White	DTR Phase Dim





Lunis

30110

GOOD NIGHT

Surface



INDOOR SURFACE



DIMMABLE




CASAMBI




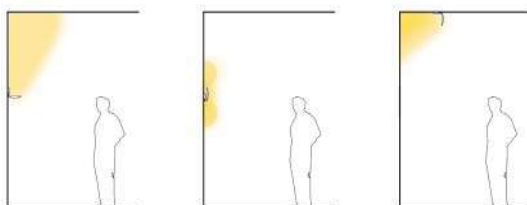
WIRELESS



Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	35.000 h
IP	20	Cut-out Size	-
Wattage	15W	Dimensions	Ø205 h70mm
Lumen output	1600	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		

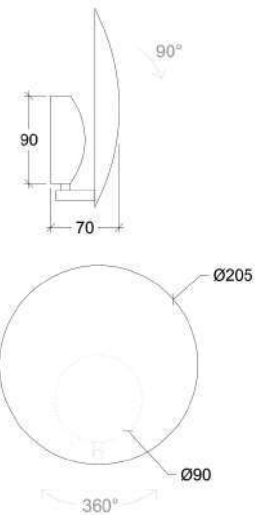

30110.15..**.*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30110	15	27 2700 30 3000	 4 Superwide	<i>Exterior & Interior</i> ☉ 11 White & White ● 22 Black & Black ● 32 Aluminium & Black ● 42 Gold & Black ● A2 Corten & White ● B2 Copper & Black Other finishes available upon request	DTR Phase Dim



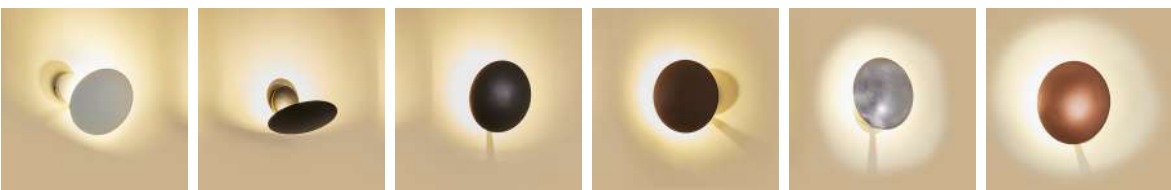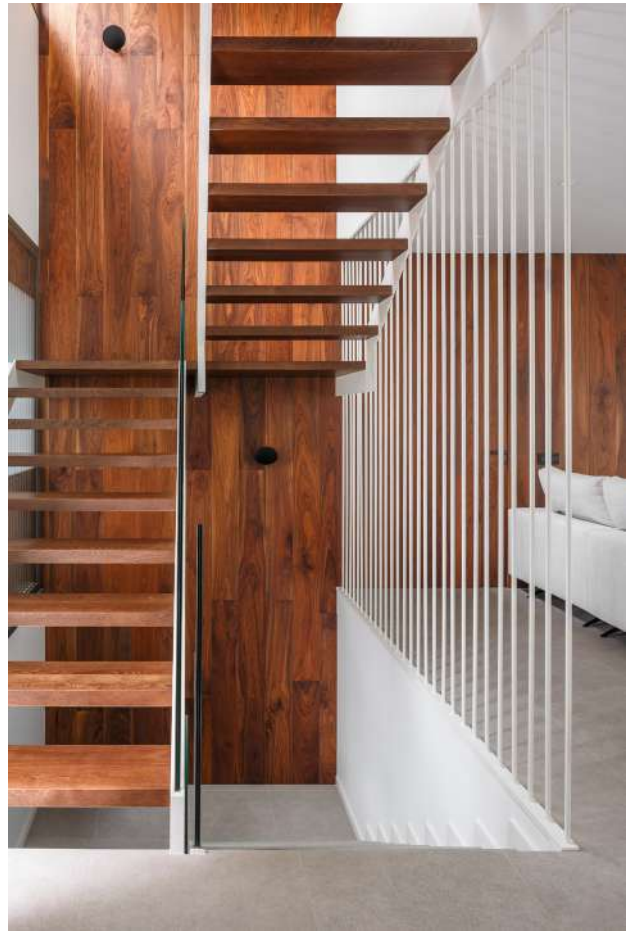


Lunis Twin



30111

GOOD NIGHT

Surface




Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	35.000 h
IP	20	Cut-out Size	-
Wattage	2x15W	Dimensions	Ø205x2 h145mm
Lumen output	2x1600	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Phase Dim		

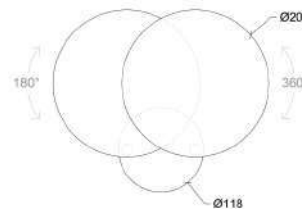

30111.30.**.*.**.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30111	15	27 2700 30 3000	4 Superwide	<i>Exterior & Interior</i> ☉ 11 White & White ● 22 Black & Black ● 32 Aluminium & Black ● 42 Gold & Black ● A2 Corten & White ● B2 Copper & Black Other finishes available upon request	DTR Phase Dim

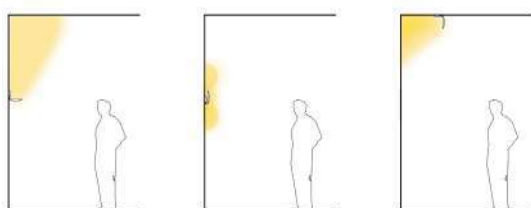



Bitubus 100 Surface

30136

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2x15W
Lumen output	2x700
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable *Dimmable drivers upon request


CRI	>90
Life Time	35.000 h
Cut-out Size	-
Dimensions	1160x140 h90mm
Adjustable	No

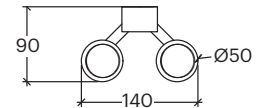

30136...**.**.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30136	30	24 2400		10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		27 2700		20 Black	
		30 3000		30 Aluminium	
		40 4000		40 Gold	
				A0 Corten	
				B0 Copper	

Other dimensions and wattages available upon request

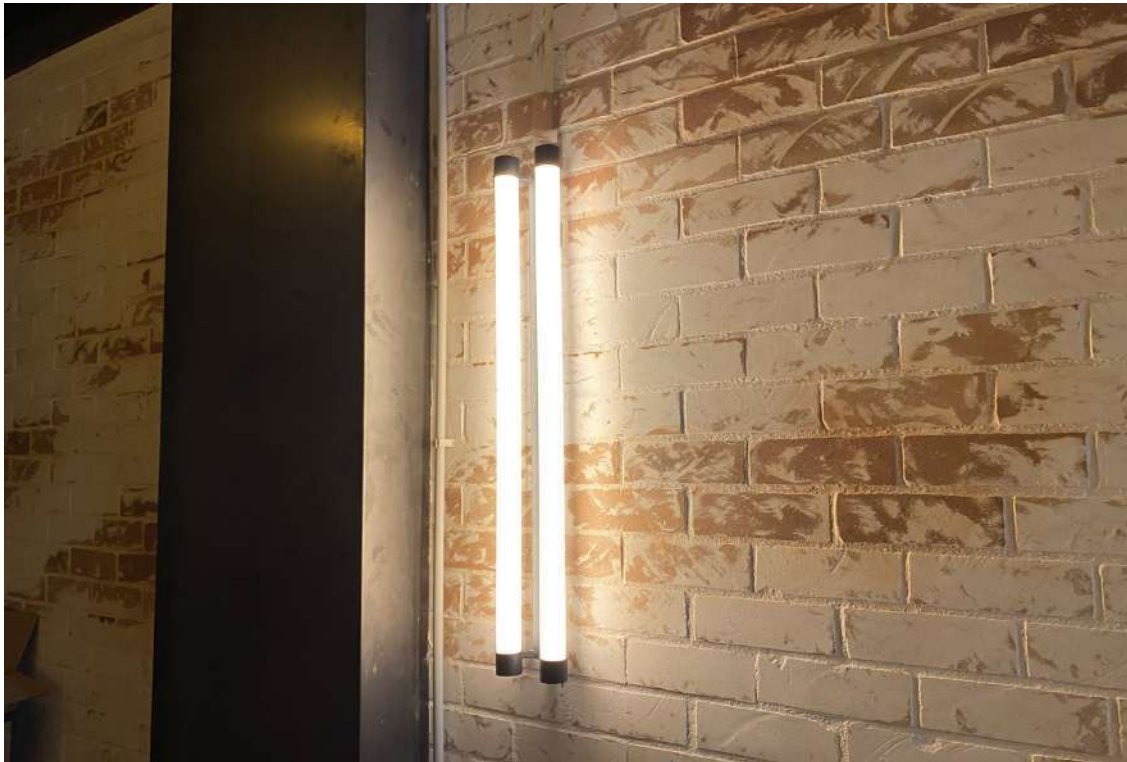

Bitubus 100 Suspended

35136



GOOD NIGHT

Suspended



Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	2x15W
Lumen output	2x700
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable *Dimmable drivers upon request

CRI	>90
Life Time	35.000 h
Cut-out Size	-
Dimensions	1160x140 h90mm
Adjustable	No

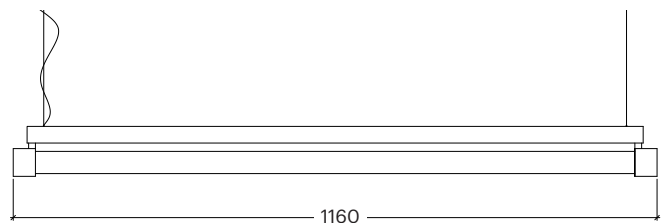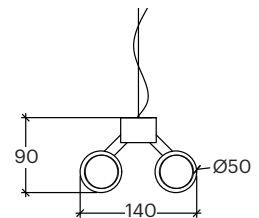

35136...**.**.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35136	30	24 2400	6 Opal 120°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		27 2700		● 20 Black	
		30 3000		● 30 Aluminium	
		40 4000		● 40 Gold	
				● A0 Corten	
				● B0 Copper	

Other dimensions and wattages available upon request

QX



30071

GOOD NIGHT

Surface



Installation	Indoor / Outdoor	CRI	>90
Mounting Position	Surface	Life Time	30.000 h
IP	54	Cut-out Size	-
Wattage	3W + 3W	Dimensions	100x100 h110mm
Lumen output	600	Adjustable	Yes
Connection	230V		
Driver	Included built-in		
Dimmable	Non-dimmable		



30071.6.30.X. **.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30071	6	30 3000	X 0° a 120°	<i>Exterior & Interior</i> ◎ 11 White & White ● 26 Black & Dark Grey ○ 31 Aluminium & White ● 41 Gold & White ◎ 66 Dark Grey & Dark grey ● A1 Corten & White ● B1 Copper & White RO RAL Chart	NDI Driver included (non-dimmable)



Linestrum 30.1


30072

GOOD NIGHT

Surface



Installation	Indoor	CRI	>80
Mounting Position	Surface	Life Time	25.000 h
IP	20	Cut-out Size	-
Wattage	5W	Dimensions	300x40 h71mm
Lumen output	400	Adjustable	
Connection	230V		
Driver	Included		
Dimmable	Non-dimmable		

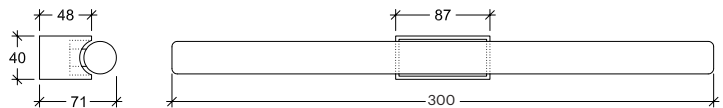

30072.5.27.6.**.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30072	5	27 2700	6 Opal	<ul style="list-style-type: none"> 10 White 20 Black 30 Aluminium 40 Gold A0 Corten B0 Copper 	NDI Driver included non-dimmable)



Linestrum 30.2


30073

GOOD NIGHT

Surface



Installation	Indoor	CRI	>80
Mounting Position	Surface	Life Time	25.000 h
IP	20	Cut-out Size	-
Wattage	5W	Dimensions	307x40 h71mm
Lumen output	400	Adjustable	
Connection	230V		
Driver	Included		
Dimmable	Non-dimmable		

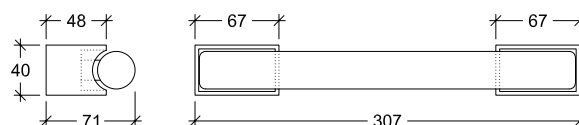

30073.5.276.**.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30073	5	27 2700	6 Opal	<ul style="list-style-type: none"> <input type="radio"/> 10 White <input type="radio"/> 20 Black <input type="radio"/> 30 Aluminium <input type="radio"/> A0 Corten <input type="radio"/> B0 Copper <input type="radio"/> M0 Metallic Copper <input type="radio"/> N0 Metallic Gold <input type="radio"/> P0 Metallic Chrome 	NDI Driver included (non-dimmable)




Linestrum 50.1


30074

GOOD NIGHT


Surface



Installation	Indoor	CRI	>80
Mounting Position	Surface	Life Time	25.000 h
IP	20	Cut-out Size	-
Wattage	8W	Dimensions	500x40 h71mm
Lumen output	700	Adjustable	
Connection	230V		
Driver	Included		
Dimmable	Non-dimmable		

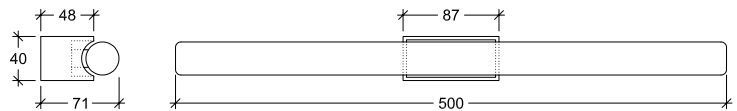

30074.8.27.6.**.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30074	8	27 2700	 6 Opal	<ul style="list-style-type: none"> <input type="radio"/> 10 White <input type="radio"/> 20 Black <input type="radio"/> 30 Aluminium <input type="radio"/> A0 Corten <input type="radio"/> B0 Copper <input type="radio"/> M0 Metallic Copper <input type="radio"/> N0 Metallic Gold <input type="radio"/> P0 Metallic Chrome 	NDI Driver included (non-dimmable)




Linestrum 50.2


30075

GOOD NIGHT

Surface

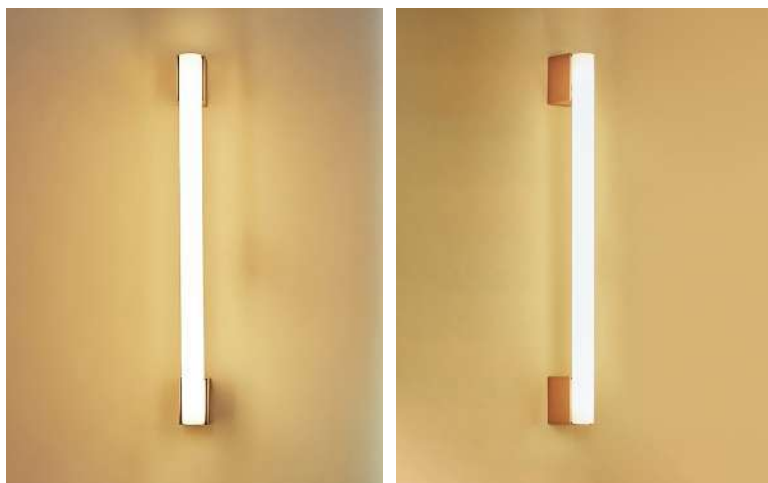

Installation	Indoor	CRI	>80
Mounting Position	Surface	Life Time	25.000 h
IP	20	Cut-out Size	-
Wattage	8W	Dimensions	507x40 h71mm
Lumen output	700	Adjustable	
Connection	230V		
Driver	Included		
Dimmable	Non-dimmable		

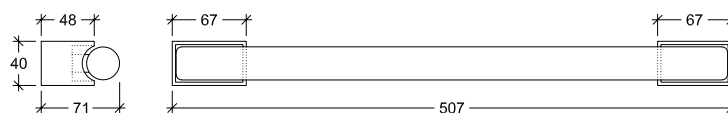

30075.8.27.6.**.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30075	8	27 2700	6 Opal	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium ● A0 Corten ● B0 Copper ● M0 Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome 	NDI Driver included (non-dimmable)



Linestrum 100.2


30076

GOOD NIGHT

Surface



Installation	Indoor	CRI	>80
Mounting Position	Surface	Life Time	25.000 h
IP	20	Cut-out Size	-
Wattage	15W	Dimensions	1007x40 h71mm
Lumen output	1500	Adjustable	
Connection	230V		
Driver	Included		
Dimmable	Non-dimmable		

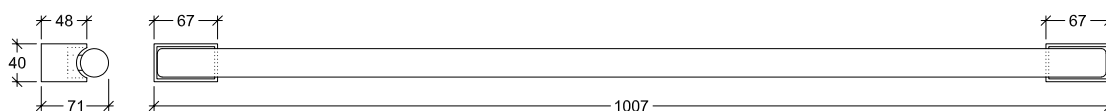

30076.15.27.6.**.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30076	15	27 2700	6 Opal	<ul style="list-style-type: none"> <input type="radio"/> 10 White <input type="radio"/> 20 Black <input type="radio"/> 30 Aluminium <input type="radio"/> AO Corten <input type="radio"/> BO Copper <input type="radio"/> MO Metallic Copper <input type="radio"/> NO Metallic Gold <input type="radio"/> PO Metallic Chrome 	NDI Driver included (non-dimmable)




Porcellanatum Basic

30080



GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
Material	Porcelain
IP	20
Wattage	E27
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	E27
Life Time	E27
Cut-out Size	-
Dimensions	Ø65 h135mm
Adjustable	No

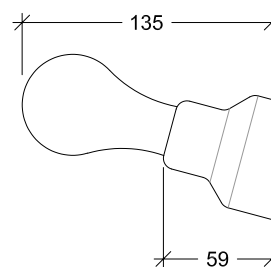

30080.E27.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30080	E27	XX Depending on lamp	X Depending on lamp	© 11 White & White	Depending on lamp




Porcellanatum Basic Switch

30081


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
Material	Porcelain
IP	20
Wattage	E27
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	E27
Life Time	E27
Cut-out Size	-
Dimensions	Ø70 h131mm
Adjustable	No

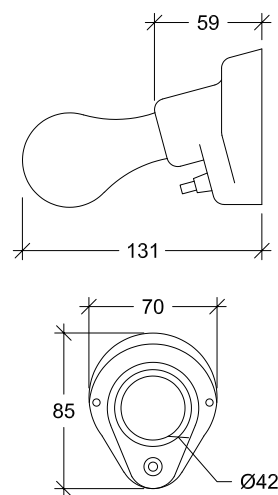

30081.E27.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30081	E27	XX Depending on lamp	X Depending on lamp	⊙ 11 White & White	Depending on lamp




Purus

30088



GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
Material	Aluminium
IP	20
Wattage	E27
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	E27
Life Time	E27
Cut-out Size	-
Dimensions	Ø98 h162mm
Adjustable	No

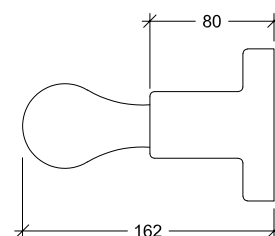

30088.E27X.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30088	E27	XX Depending on lamp	X Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium ● 40 Gold ● A0 Corten ● B0 Copper 	Depending on lamp







Spots

Surface / Recessed

- 170 Pictus Base Surface
- 171 Pictus Base Recessed
- 172 Fluctus 140 Base Surface
- 173 Fluctus 150 Base GU10 Surface
- 174 Fluctus 180 Base Surface
- 176 Furtivus-Zoom Surface
- 178 Fluctus 140 Base Recessed
- 179 Fluctus 150 Base GU10 Recessed
- 180 Audere Base Surface
- 181 Audere Base Recessed
- 182 Museum Plus Base Surface
- 184 Museum Plus Base Recessed

Track


- 186 Pictus Track
- 188 Fluctus 140Track
- 190 Fluctus 150 Track GU10
- 192 Fluctus 180 Track 5W
- 194 Furtivus-Zoom Track
- 196 Audere Track
- 198 Museum Plus Track
- 202 Ars
- 204 Elongatus tarck
- 206 Sabrolumo Track L600
- 207 Sabrolumo Track L1200
- 208 Sabrolumo Track L1500
- 209 Sabrolumo UGR Track L600
- 210 Sabrolumo UGR Track L1200
- 212 Sabrolumo UGR Track L1500
- 213 Tracks

Pictus Base Surface


30084

GOOD NIGHT

Surface



Installation	Indoor	CRI	90
Mounting Position	Ceiling surface	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	5W	Dimensions	Ø35 h135mm
Lumen output	665	Adjustable	Yes
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable *Dimmable drivers upon request		

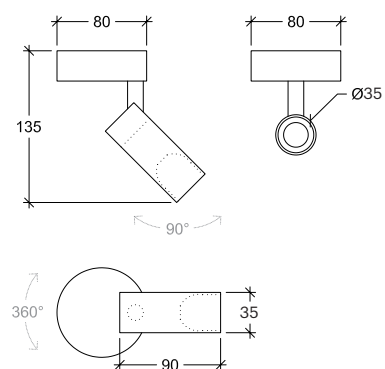

30084.5.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30084	5	27 2700	1 Narrow 14°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 30 Aluminium	
				● 40 Gold	
				● AO Corten	
				● BO Copper	

Other finishes available upon request



Pictus Base Recessed

10036

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling surface
IP	20
Wattage	5W
Lumen Output	665
Connection	230V
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø60 h60mm
Dimensions	Ø35 h108mm
Adjustable	Yes

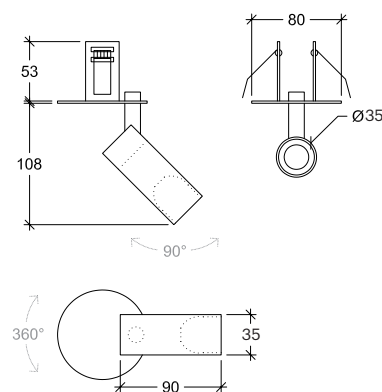

10036.5.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10036	5	27 2700	1 Narrow 12°	○ 10 White	XXX Driver not included (See drivers section)
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 30 Aluminium	
				● 40 Gold	
				● AO Corten	
				● BO Copper	

Other finishes available upon request




Fluctus 140 Base Surface


30094

GOOD NIGHT

Surface



Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	5W 8,6W	Dimensions	Ø56 h140mm
Lumen output	700 1200	Adjustable	Yes
Connection	230V		
Driver	Included built-in		
Dimmable	Non-dimmable		

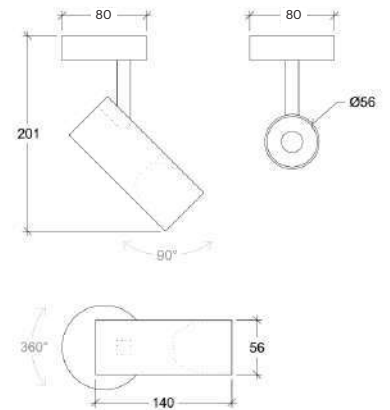

30094.9.**.*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30094	5	27 2700	1 Narrow 14°	○ 10 White	NDI Driver included (non-dimmable)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
			4 Superwide 60°		




Other finishes are available upon request for the external body and the internal ring

Fluctus 150 Base GU10 Surface

GOOD NIGHT


30094

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø56 h153
Adjustable	Yes

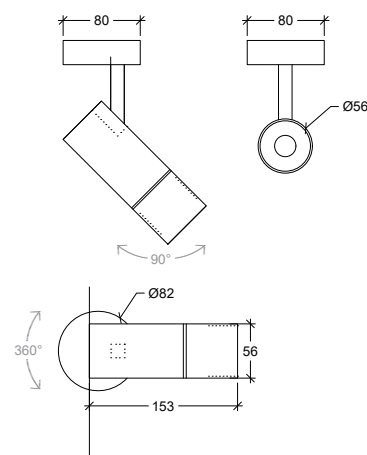

30094.GU10.XX.X.XX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30094	GU10	X	X	<ul style="list-style-type: none"> ○ 10 White ● 20 Black <p>Other finishes available upon request</p>	Depending on lamp




Other finishes are available upon request for the external body and the internal ring

Fluctus 180 Base Surface


30095

GOOD NIGHT

Surface

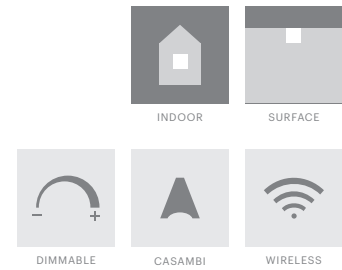

Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	5W 8,6W	Dimensions	Ø56 h180mm
Lumen output	700 1200	Adjustable	Yes
Connection	230V		
Driver	Included built-in		
Dimmable	Phase Dim		

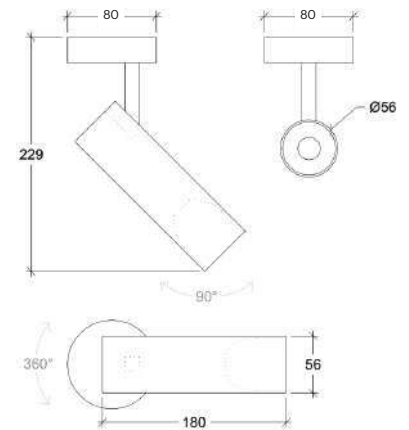

30095.9.**.***.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30095	5	27 2700	1 Narrow 14°	○ 10 White	DTR Phase Dim
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
			4 Superwide 60°		



Other finishes are available upon request for the external body and the internal ring



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Furtivus-Zoom Surface

30007

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS


Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W
Lumen output	700
Connection	230V
Driver	Included built-in
Dimmable	Phase Dim

CRI	>90
Life Time	30.000 h
Cut-out Size	-
Dimensions	Ø60 h165mm
Adjustable	Yes

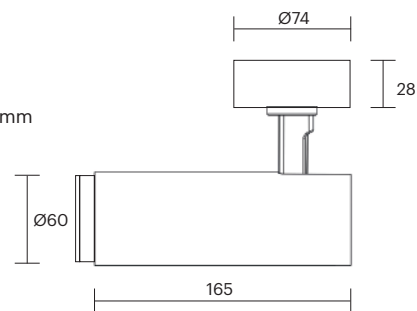

30007.12.27.9.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30007	12	27 2700	9 Zoom 9°-42°	○ 10 White ● 20 Black	DTR

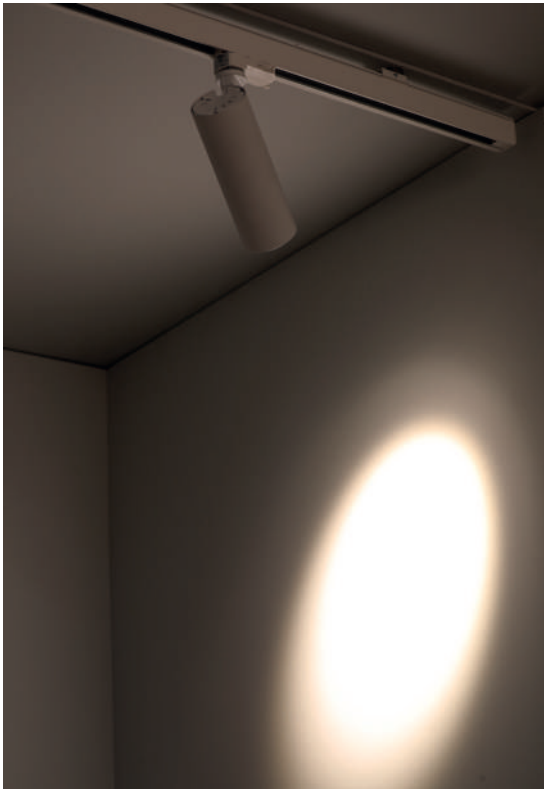

Fluctus 140 Base Recessed


10037

GOOD NIGHT

Recessed




INDOOR RECESSED



DIMMABLE CASAMBI WIRELESS


Installation	Indoor	
Mounting Position	Recessed	
IP	20	
Wattage	5W	8,6W
Lumen Output	700	1200
Connection	150mA	250mA
Driver	Not included	
Dimmable	ON/OFF, DALI, PUSH (dimmable drivers on request)	

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø70mm h60mm
Dimensions	Ø56 h140mm
Adjustable	Yes

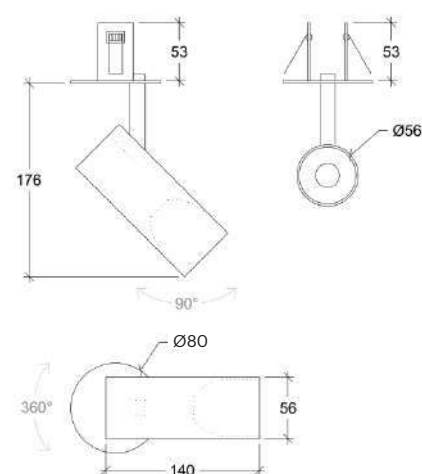

10037.*.**.*.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10037	5	27 2700	1 Narrow 14°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
	4 Superwide 60°				

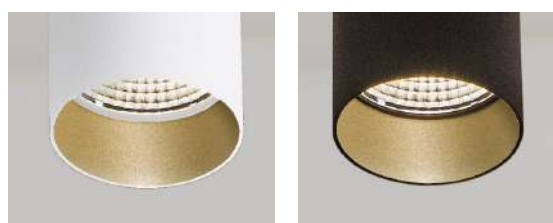


Other finishes are available upon request for the external body and the internal ring

Fluctus 150 Base GU10 Recessed

GOOD NIGHT


10037

Recessed




Installation	Indoor
Mounting Position	Recessed
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø70mm h60mm
Dimensions	Ø56 h153mm
Adjustable	Yes

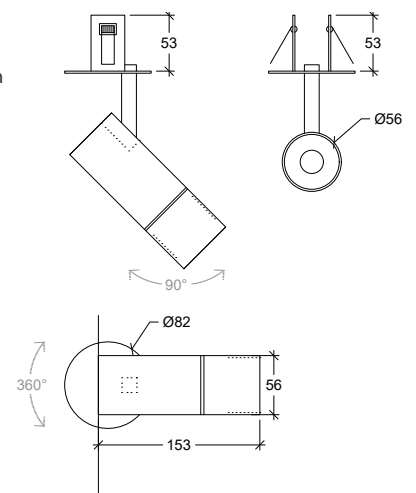

10037.GU10.XX.X.XX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10037	GU10	X	X	<ul style="list-style-type: none"> ○ 10 White ● 20 Black <p>Other finishes available upon request</p>	Depending on lamp

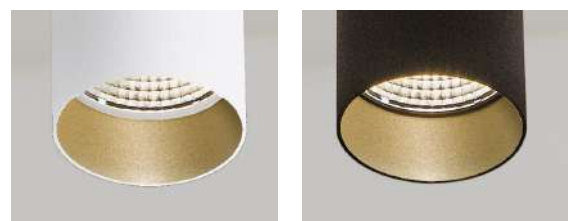


Other finishes are available upon request for the external body and the internal ring

Audere Base Surface

30096


GOOD NIGHT

Surface

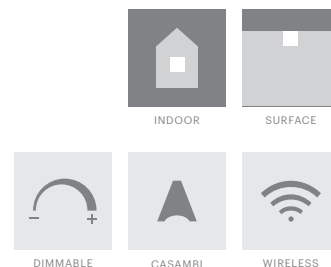


Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	20W
Lumen Output	2600
Connection	230V
Driver	Included built-in
Dimmable	Non-dimmable

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	-
Dimensions	Ø80 h160mm
Adjustable	Yes

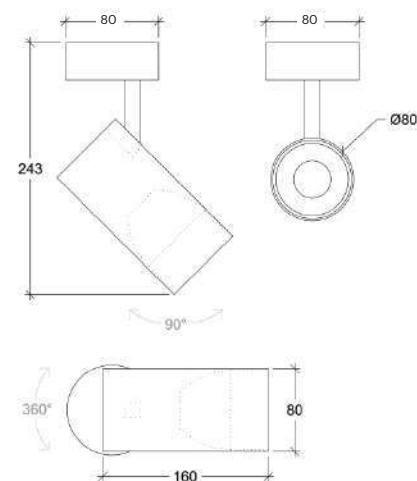

30096.20.**.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30096	20	27 2700	1 Narrow 14°	○ 10 White	NDI Driver included (non-dimmable)
		30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
		4 Superwide 60°			

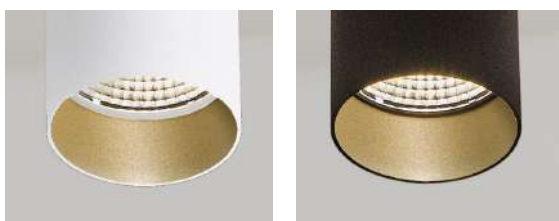


Other finishes are available upon request for the external body and the internal ring

Audere Base Recessed

10038


GOOD NIGHT

Recessed




Installation	Indoor
Mounting Position	Recessed
IP	20
Wattage	20W
Lumen Output	2600
Connection	600mA
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (dimmmable drivers on request)

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø70mm h60mm
Dimensions	Ø80 h160mm
Adjustable	Yes

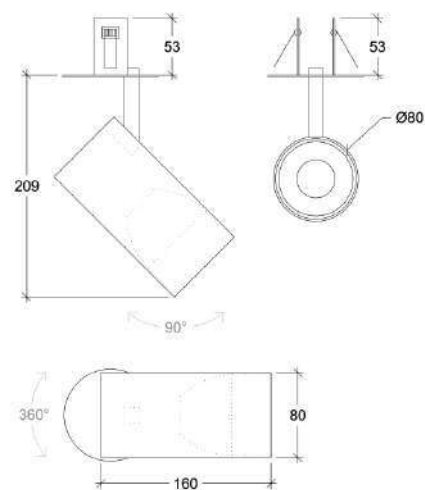

10038.20.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10038	20	27 2700	1 Narrow 14°	○ 10 White	XXX Driver not included (See drivers section)
		30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
		4 Superwide 60°			

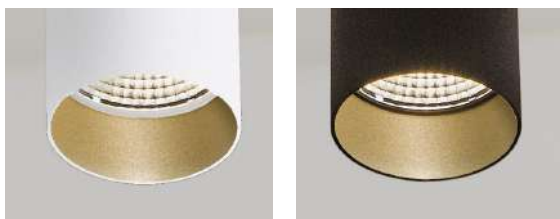


Other finishes are available upon request for the external body and the internal ring

Museum Plus Base Surface

30097


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Track
IP	20
Wattage	12,3W 23,6W
Lumen Output	1600 3300
Connection	230V
Driver	Included built-in
Dimmable	Phase Dim

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	-
Dimensions	Ø93 h90mm
Adjustable	Yes

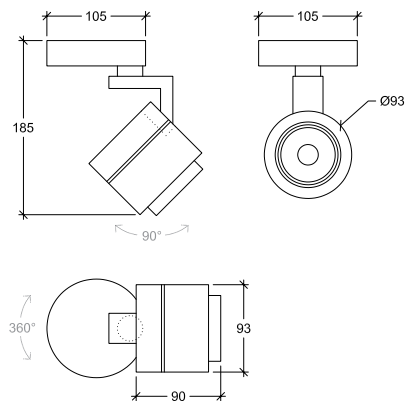

30097.**.*.*.*


Number	W	Colour Temperature	Light Distribution	Finish	Dim
30097	12	27 2700	1 Narrow 12°	○ 10 White	DTR
	24	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 36°	Other finishes available upon request	



- 20022.A.1.20 Asymmetric cowl
 - 20022.A.2.20 Symmetric cowl
 - 20022.A.3.20 Barn doors
 - 20022.A.4.20 Oval lens
 - 20022.A.5.20 Spread lens
 - 20022.A.6.20 Honeycomb Louvre
- Black



CREP NOVA / PROJECT: CARLOS MARTÍNEZ INTERIORS

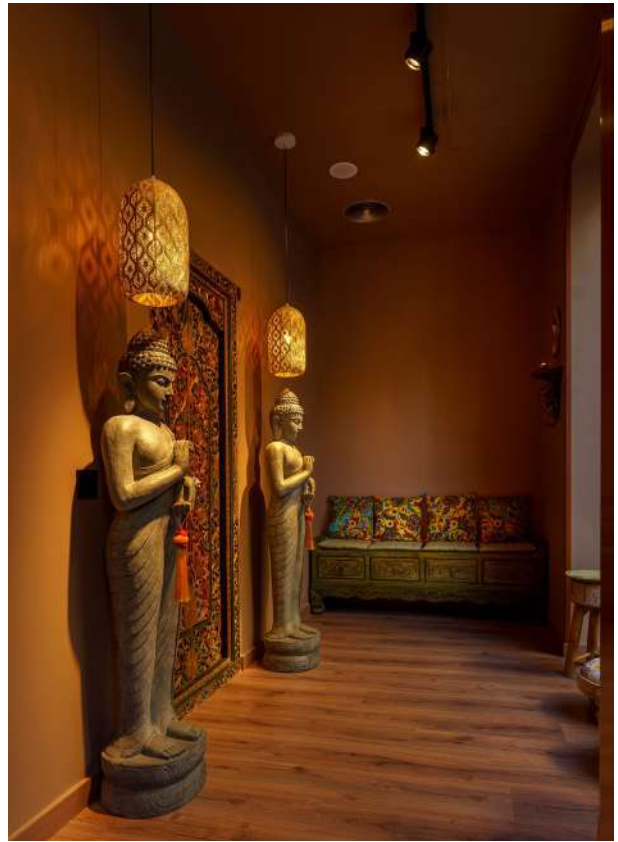

Museum Plus Base Recessed

10039

GOOD NIGHT

Recessed



INDOOR RECESSED




DIMMABLE CASAMBI WIRELESS

Installation	Indoor
Mounting Position	Track
IP	20
Wattage	12,3W 23,6W
Lumen Output	1600 3300
Connection	359mA 700mA
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø70 h60mm
Dimensions	Ø93 h90mm
Adjustable	Yes



Ø70

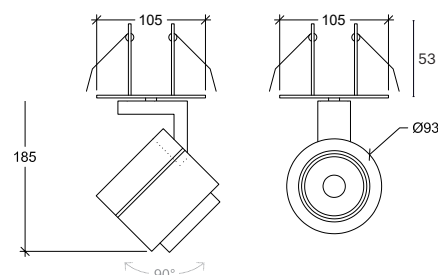

10039**0.**.*.**


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10039	12	27 2700	1 Narrow 12°	○ 10 White	XXX Driver not included (See drivers section)
	24	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 36°	Other finishes available upon request	



- 20022.A.1.20 Asymmetric cowl
- 20022.A.2.20 Symmetric cowl
- 20022.A.3.20 Barn doors
- 20022.A.4.20 Oval lens
- 20022.A.5.20 Spread lens
- 20022.A.6.20 Honeycomb Louvre


● Black





Installation	Indoor
Mounting Position	Track
IP	20
Wattage	6,8W
Lumen Output	845
Connection	230V
Driver	Included built-in
Dimmable	Non-dimmable (dimmable on request)

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	70mm
Dimensions	Ø35 h90mm
Adjustable	Yes

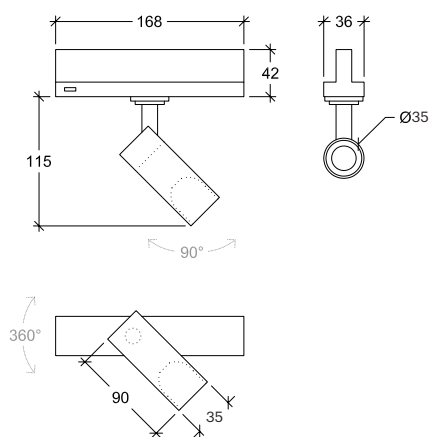

20023.7.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20023	7	27 2700	1 Narrow 12°	○ 10 White	NDI
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 30 Aluminium	
				● 40 Gold	
				● AO Corten	
				● BO Copper	

Other finishes available upon request






Fluctus 140 Track

20024


GOOD NIGHT

Track




Installation	Indoor	
Mounting Position	Track	
IP	20	
Wattage	5W	8,6W
Lumen Output	700	1200
Connection	230V	
Driver	Included built-in	
Dimmable	Non-dimmable	

CRI	>90
Life Time	L80/B10 > 55.000h
Cut-out Size	-
Dimensions	Ø56 h140mm
Adjustable	Yes

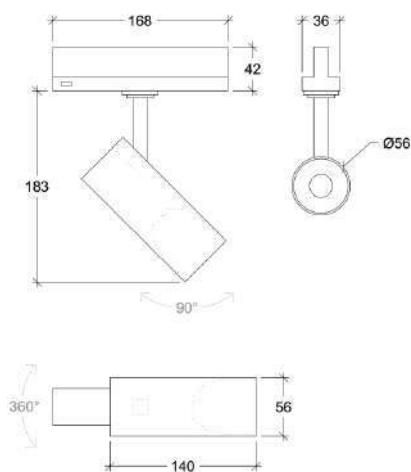

20024.9.**.***.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20024	5	27 2700	1 Narrow 14°	○ 10 White ● 20 Black	NDI Driver included (non-dimmable)
		30 3000	2 Medium 25°		
	9	40 4000	3 Wide 40°	Other finishes available upon request	
			4 Superwide 60°		

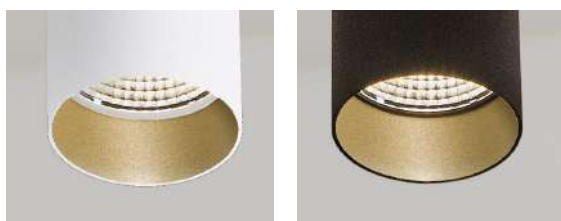

Other finishes are available upon request for the external body and the internal ring



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA




PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Fluctus 150 Track GU10

20024


GOOD NIGHT

Track




Installation	Indoor
Mounting Position	Track
IP	20
Wattage	GU10
Lumen Output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø56 h153mm
Adjustable	Yes

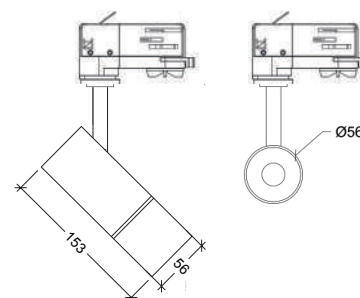

20024.GU10.XX.X.XX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20024	GU10	X	X	<input type="radio"/> 10 White <input checked="" type="radio"/> 20 Black Other finishes available upon request	Depending on lamp

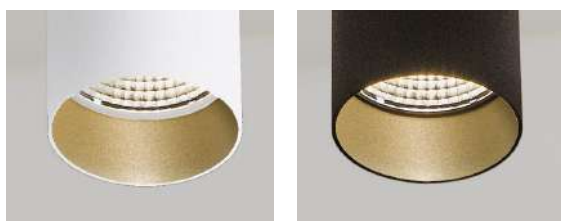

Other finishes are available upon request for the external body and the internal ring



LA MALLORQUINA / PROJECT: ESTUDI FRANCESC PONS




Fluctus 180 Track

20026


GOOD NIGHT

Track




Installation	Indoor	
Mounting Position	Track	
IP	20	
Wattage	5W	8,6W
Lumen Output	700	1200
Connection	230V	
Driver	Included	
Dimmable*	Phase dim *DALI on request	

CRI	>90
Life Time	L80/B10 > 55.000h
Cut-out Size	-
Dimensions	Ø56 h180mm
Adjustable	Yes

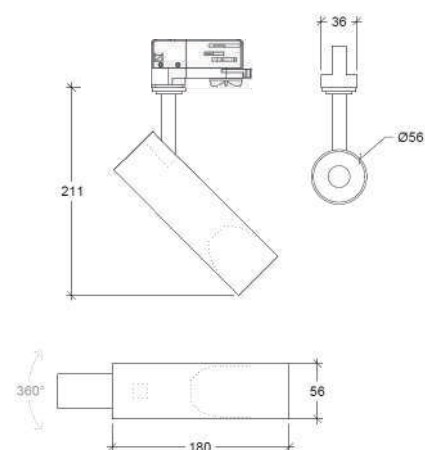

20026.*.*.*.*.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20026	5	27 2700	1 Narrow 14°	○ 10 White	DTR* Phase Dim Driver included DALI dimming on request
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
			4 Wide 60°		

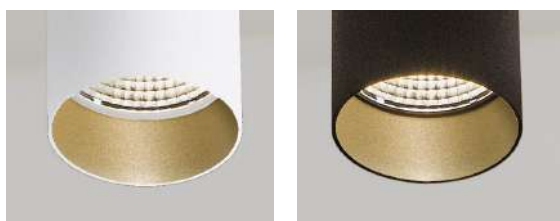

Other finishes are available upon request for the external body and the internal ring



RESTAURANT MAKO / PROJECT: FORTEZA APARICIO



EL CROSANET / PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

Furtivus-Zoom Track

20007

GOOD NIGHT

Track




INDOOR

TRACK




DIMMABLE

Installation	Indoor	CRI	>90
Mounting Position	Track	Life Time	30.000 h
IP	20	Cut-out Size	-
Wattage	12W	Dimensions	Ø60 h165mm
Lumen Output	700	Adjustable	Yes
Connection	230V		
Driver	Included built-in		
Dimmable*	Phase Dim		

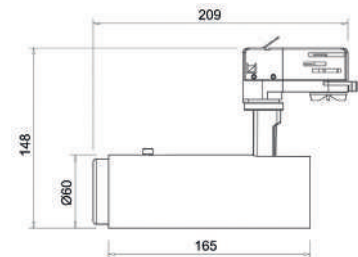

20007.12.27.9.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20007	12	27 2700	9 Zoom 9°-42°	○ 10 White ● 20 Black	DTR Phase Dim

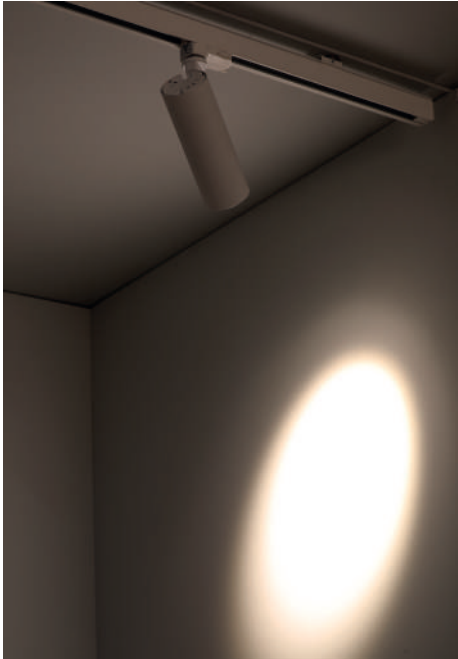


Audere Track


20025

GOOD NIGHT

Track




Installation	Indoor	CRI	>90
Mounting Position	Track	Life Time	L80/B10 > 55.000h
IP	20	Cut-out Size	-
Wattage	20W	Dimensions	Ø80 h160mm
Lumen Output	2600	Adjustable	Yes
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable (dimmable drivers on request) *DALI on request		

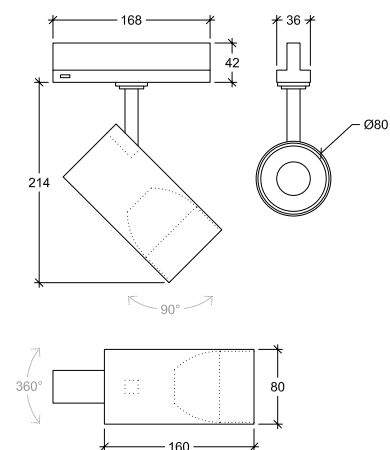

20025.20.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20025	20	27 2700	1 Narrow 14°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request DALI dimming on request
		30 3000	2 Medium 25°	20 Black	
		40 4000	3 Wide 40°	30 Aluminium (Black connector)	
			4 Superwide 60°		
					Other finishes available upon request

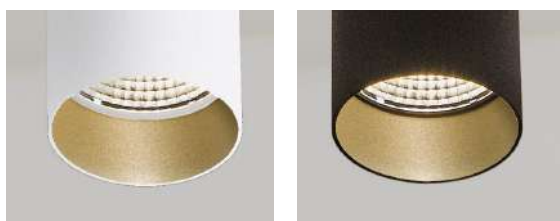

Other finishes are available upon request for the external body and the internal ring





LA MALLORQUINA / PROJECT: ESTUDI FRANCESC PONS




LA MALLORQUINA / PROJECT: ESTUDI FRANCESC PONS

Museum Plus Track

20022


GOOD NIGHT

Track



Installation	Indoor	
Mounting Position	Track	
IP	20	
Wattage	12,3W	23,6W
Lumen Output	1600	3300
Connection	230V	
Driver	Included built-in	
Dimmable	ON/OFF, DALI2	

CRI	>90	
Life Time	L80/B10 > 55.000h	
Cut-out Size	-	
Dimensions	Ø93 h90mm	
Adjustable	Yes	
Track connector	ON/OFF	168mm
	DALI2 12,3W	212mm
	DALI2 23,6W	248mm

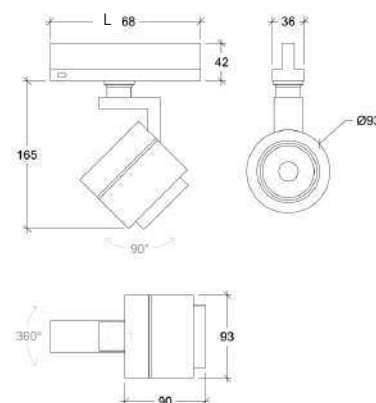

20022.20.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20022	12	27 2700	1 Narrow 12°	○ 10 White	NDI Driver included DAL DALI2 included
	24	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 36°	Other finishes available upon request	



- 20022.A.1.20 Asymmetric cowl
 - 20022.A.2.20 Symmetric cowl
 - 20022.A.3.20 Barn doors
 - 20022.A.4.20 Oval lens
 - 20022.A.5.20 Spread lens
 - 20022.A.6.20 Honeycomb Louvre
- Black



CREP NOVA / PROJECT: CARLOS MARTÍNEZ INTERIORS





NUAD THAI MASSAGE SPA



CAFÉ D'ESPANYA TREMP / PROJECT: OLGA ESCOBAR ESTUDIOS / PHOTO: MAR ARPÓN





EL FOMENT / PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: MARC TORRA



GONZALEZ & CO / PROJECT: TARRUELLA TRENCHS STUDIO / PHOTO: DAVID VILANOVA

Ars

20029

GOOD NIGHT

Track




INDOOR

TRACK

Installation	Indoor
Mounting Position	Track
IP	20
Wattage	15W
Lumen Output	1130
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable

CRI	>90
Life Time	30.000 h
Cut-out Size	-
Dimensions	Ø78 h234mm
Adjustable	-

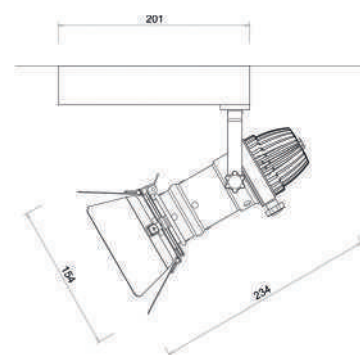

20029.15.27.2.20

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20029	15	27 2700	2 Medium 24°	● 20 Black	NDI* Driver included (non-dimmable)



BORDA LOBATO / PROJECT: TOOLSTUDIO BY GIANNI RUGGIERO / PHOTO: ANNA TUR BLANCH

Elongatus Track

20040

GOOD NIGHT

Track




Installation	Indoor
Mounting Position	Track
IP	20
Wattage	20W
Lumen Output	1800
Connection	230V
Driver	Included built-in
Dimmable	Non-dimmable

CRI	>80
Life Time	35.000 h
Cut-out Size	-
Dimensions	57x33 h603mm
Adjustable	-



20040.20.30.6.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20040	20	30 3000	 6 Opal	<input type="radio"/> 10 White <input checked="" type="radio"/> 20 Black	NDI Driver included non-dimmable)




Sabrolumo Track L600

20440



GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
IK	06
Wattage	27W (24W / 20W / 17W)*
Lumen Output	4320
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable (dimmable drivers on request) DALI

CRI	>80
Life Time	50.000 h
Cut-out Size	-
Dimensions	607x64 h54mm
Adjustable	No

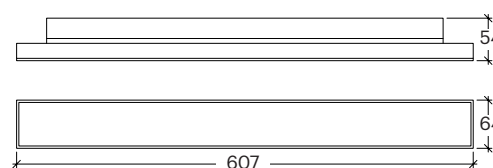

20440.27.**.*.**.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20440	27	30 3000	2 Medium 30°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000	3 Wide 60°		
		50 5000	4 Superwide 90°		
		60 6000	5D Double Asym. 2x25°		
			5DW Double Asym. 2x60°		
			6 Opal 120°		

* Power selector



Phase adjustable L1/L2/L3




Sabrolumo Track L1200

20441



GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
IK	06
Wattage	53W (46W / 39W / 17W)*
Lumen Output	8480
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable (dimmable drivers on request) DALI

CRI	>80
Life Time	50.000 h
Cut-out Size	-
Dimensions	1204x64 h54mm
Adjustable	No

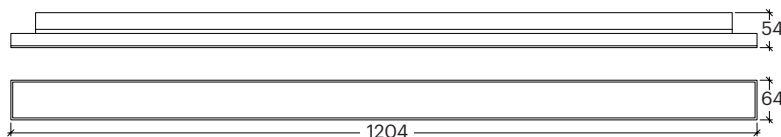

20441.53.**.**.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20441	53	30 3000	2 Medium 30°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000	3 Wide 60°		
		50 5000	4 Superwide 90°		
		60 6000	5D Double Asym. 2x25°		
			5DW Double Asym. 2x60°		
			6 Opal 120°		

* Power selector




Phase adjustable L1/L2/L3

Sabrolumo Track L1500

20442



GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
IK	06
Wattage	64W (56W / 47W / 39W)*
Lumen Output	10240
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable (dimmable drivers on request) DALI

CRI	>80
Life Time	50.000 h
Cut-out Size	-
Dimensions	1504x64 h54mm
Adjustable	No

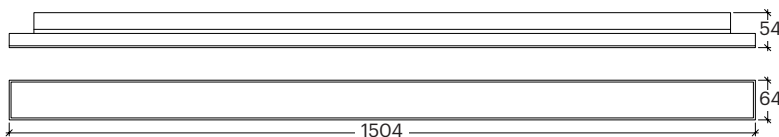

20442. 64.**.**.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20442	64	30 3000	2 Medium 30°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000	3 Wide 60°		
		50 5000	4 Superwide 90°		
		60 6000	5D Double Asym. 2x25°		
			5DW Double Asym. 2x60°		
			6 Opal 120°		

* Power selector



Phase adjustable L1/L2/L3

Sabrolumo UGR Track L600


20450

GOOD NIGHT



Track



UGR
<19



Installation	Indoor	CRI	>80
Mounting Position	Track	Life Time	50.000 h
IP	20	Cut-out Size	-
IK	06	Dimensions	607x64 h54mm
Wattage	27W (24W / 20W / 17W)*	Adjustable	No
Lumen Output	3300		
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable (dimmable drivers on request) DALI		

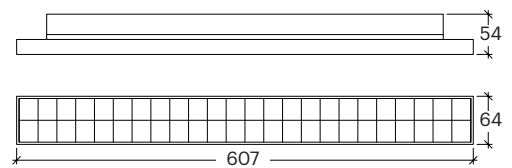

20450.27.**.*.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20450	27	30 3000	3 Wide 50° UGR<19 Silver reflector	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	
		50 5000			
		60 6000			

* Power selector



Phase adjustable L1/L2/L3

Sabrolumo UGR Track L1200


20451

GOOD NIGHT

Track





UGR
<19



Installation	Indoor
Mounting Position	Track
IP	20
IK	06
Wattage	53W (46W / 39W / 17W)*
Lumen Output	6700
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable (dimmable drivers on request) DALI

CRI	>80
Life Time	50.000 h
Cut-out Size	-
Dimensions	1204x64 h54mm
Adjustable	No

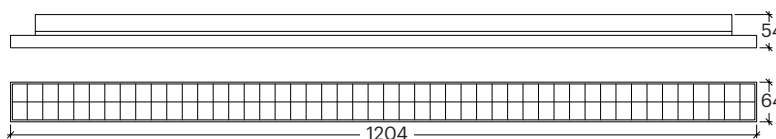

20451.53.**.*.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20451	53	30 3000	3 Wide 50° UGR<19 Silver reflector	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	
		50 5000			
		60 6000			

* Power selector



Phase adjustable L1/L2/L3

Sabrolumo UGR Track L1500


20452

GOOD NIGHT

Track





UGR
<19



Installation	Indoor
Mounting Position	Track
IP	20
IK	06
Wattage	64W (56W / 47W / 39W)*
Lumen Output	8250
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable (dimmable drivers on request) DALI

CRI	>80
Life Time	50.000 h
Cut-out Size	-
Dimensions	1504x64 h54mm
Adjustable	No

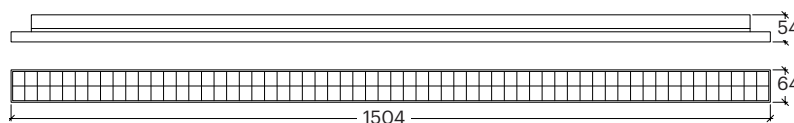

20452. 64.**.**.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20452	64	30 3000	3 Wide 50° UGR<19 Silver reflector	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	
		50 5000			
		60 6000			



* Power selector




Phase adjustable L1/L2/L3



20XTS

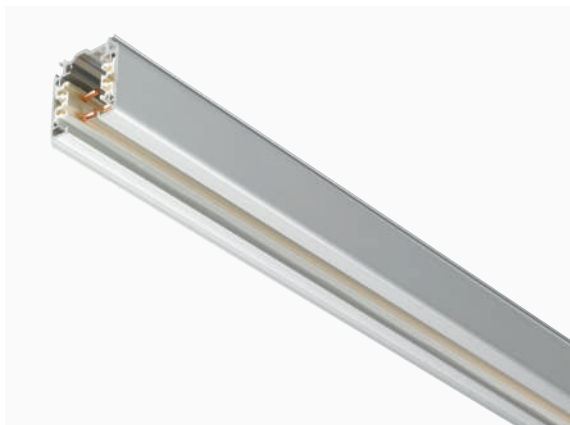


Surface Profile

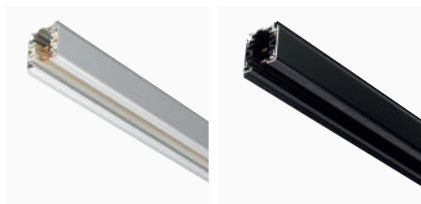


Reference	Description	Length	Finish
20XTS4100-2	Lighting track 3-circuit	1000mm	● Black
20XTS4100-3	Lighting track 3-circuit	1000mm	○ White
20XTS4200-2	Lighting track 3-circuit	2000mm	● Black
20XTS4200-3	Lighting track 3-circuit	2000mm	○ White
20XTS4300-2	Lighting track 3-circuit	3000mm	● Black
20XTS4300-3	Lighting track 3-circuit	3000mm	○ White

Other tracks (upon request)


Recessed 3-Phase Track



Surface DALI Track



Recessed DALI Track



1. Accessories for Surface

End Feed

- 20XTS11-2 End feed right
- 20XTS11-3 End feed right
- 20XTS12-2 End feed left
- 20XTS12-3 End feed left

**End Cap**

- 20XTS41-2 End cap
- 20XTS41-3 End cap

**T-Connector**

- 20XTS40-2 T-Connector
- 20XTS40-3 T-Connector

**Straight Connector**

- 20XTS21-2 Straight connector
- 20XTS21-3 Straight connector

**Middle Feed**

- 20XTS14-2 Middle feed
- 20XTS14-3 Middle feed

**Surface Clamp**

- 20SKB10-2 Surface clamp
- 20SKB10-3 Surface clamp

**X-Connector**

- 20XTS38-2 X-Connector
- 20XTS38-3 X-Connector

**L-Connector**

- 20XTS34-2 L-Connector in
- 20XTS34-3 L-Connector in
- 20XTS35-2 L-Connector out
- 20XTS35-3 L-Connector out

**Flexible Connector**

- 20XTS23-2 Flexible corner connector
- 20XTS23-3 Flexible corner connector

**Fix Point**

- 20GA70-2 Adapter connector
- 20GA70-3 Adapter connector

**Adjustable corner**

- 20XTS24-2 Adjustable corner connector
- 20XTS24-3 Adjustable corner connector

**Accessory for suspended**

- 20SPW11SK – 2 1'5m other lengths upon request
- 20SPW11SK – 3 1'5m other lengths upon request