Outdoor products

GOOD NIGHT

Recessed

- 216 Caminus-s
- 218 Caminus-r
- 220 Caminus-I
- 222 Moenia 224 Oculus
- 225 Signum


Surface / Suspended


- 226 Lanterna Battery
- 227 Big Lanterna Battery
- 228 Lucerna 34 230V
- 229 Lucerna 50 230V
- 230 Lucerna Wall 230V
- 231 Simetrix
- 232 ERRE2
- 234 Vallum Big
- 235 Vallum Small 236 Bacilis R 237 Bacilis Q

- 238 Big Bacilis R
- 239 Big Bacilis Q
- 240 QX
- 242 Duplex244 Demissus R
- 245 Demissus Q
- 246 Deorsum
- 247 Laminus Small
- 248 Laminus Big249 Fenestra
- 250 Magicae-ip
- 251 Iudice
- 252 Unguis
- 253 Viceversa-2
- 254 Tunnel

Recessed

GOOD NIGHT

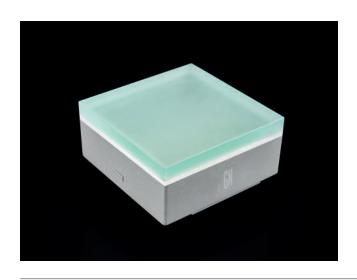



Power Rating 1,3 W Life Span 50.000 h **LED Colour** White, RGB 100° Beam Angle Input Voltage 24 VDC Material (Housing) Stainless Steel Glass Material Tempered Glass -25°C +50°C


Working Temperature Dimension (without installation box) 100 x 100 x 70 mm

Power cable: 2 x 1.0 mm2 Cable Interconnect Signal cable: 4 x 0,3 mm2

rubber cable

ON/OFF, DMX512 Control

ΙP IP67 **Luminous Flux** 75 lm





70007.1.27.6.80

100x100 Caminus-s 24V 1'3W 2700K Opal

70007.1.30.6.80

Caminus-s 100x100 24V 1'3W 3000K Opal

70007.1.RGB.6.80

Caminus-s 100x100 24V 1'3W RGB Opal





Accessories

70007.A.1 Caminus Leader cable 4m for monocolor
 70007.A.2 Caminus Jumper cable 1m for monocolor
 70007.A.3 Caminus endcap for monocolor


RGB Accessories upon request


Driver not included - See drivers section Control system and special drivers upon request

Custom projects upon request

Recessed

GOOD NIGHT

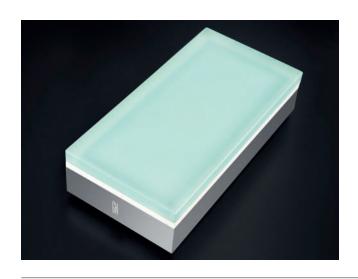



Power Rating 2,6 W Life Span 50.000 h **LED Colour** White, RGB 100° Beam Angel 24 VDC Input Voltage Material (Housing)


Stainless Steel Tempered Glass Glass Material **Working Temperature** -25°C +50°C 100 x 200 x 70 mm Dimension (without installation box) Cable Interconnect Power cable: 2 x 1.0 mm²

Signal cable: 4 x 0,3 mm²

rubber cable

ON/OFF, DMX512 Control

ΙP IP67 **Luminous Flux** 72,8lm



70008.3.27.6.80

Caminus-r 100x200 24V 2'6W 2700K Opal

70008.3.30.6.80

Caminus-r 100x200 24V 2'6W 3000K Opal

70008.3.RGB.6.80

Caminus-r 100x200 24V 2'6W RGB Opal

Accessories

70007.A.1 Caminus Leader cable 4m for monocolor 70007.A.2 Caminus Jumper cable 1m for monocolor 70007.A.3 Caminus endcap for monocolor

RGB Accessories upon request

Driver not included - See drivers section Control system and special drivers upon request

Custom projects upon request







GOOD NIGHT

70009

Recessed

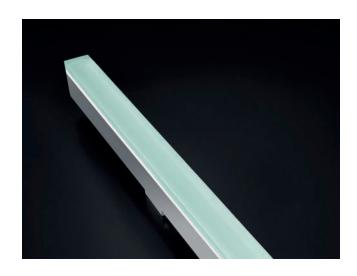



Power Rating 6 W


Life Span 50000 hours **LED Colour** White, RGB 100° Beam Angel Input Voltage 24 VDC Material (Housing) Stainless Steel Tempered Glass Glass Material **Working Temperature** -25°C +50°C Dimension (without installation box) 36 x 1000 x 70 mm Cable Interconnect

Power cable: 2 x 1.0 mm² Signal cable: 4 x 0,3 mm²

rubber cable

Control ON/OFF, DMX512

IP IP67
Luminous Flux 350 lm



70009.6.27.6.80

Caminus-I 1000x36 24V 6W 2700K Opal

70009.6.30.6.80

Caminus-I 1000x36 24V 6W 3000K Opal

70009.6.RGB.6.80

Caminus-I 1000x36 24V 6W RGB Opal




Accessories

70007.A.1 Caminus Leader cable 4m for monocolor
 70007.A.2 Caminus Jumper cable 1m for monocolor
 70007.A.3 Caminus endcap for monocolor

RGB Accessories upon request

Driver not included - See drivers section Control system and special drivers upon request

Custom projects upon request

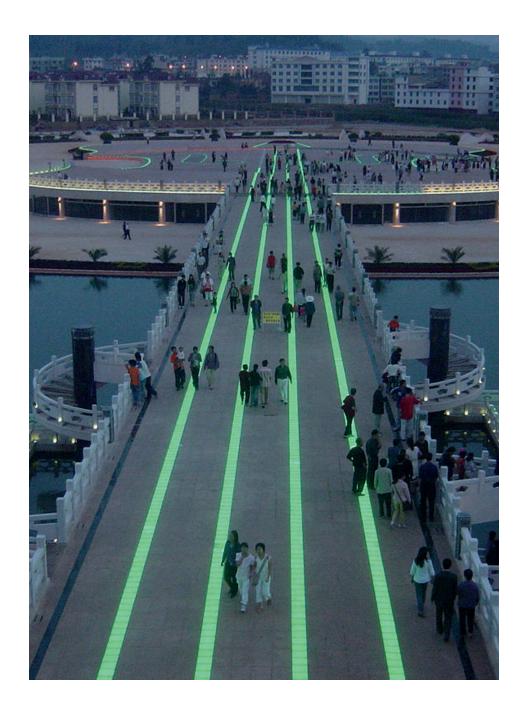

Recessed wall







Installation	Outdoor
Mounting Position	Wall recessed
IP	65
Wattage	3W
Lumen output	200
Connection	230V
Driver	Included built-in

Driver Included built-in
Dimmable* Non-dimmable

CRI Life Time Cut-out Size Dimmensions

Adjustable

20.000 h Ø75 h80mm Ø80 h70mm

>80

Ø80





75001.3.30.5.60

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75001	3	30 3000	5 Asymetric	● 60 Dark Grey	NDI* Driver included (non-dimmable)



Recessed wall









WIRELESS



Non-dimmable

Installation Indoor / Outdoor **Mounting Position** Wall recessed ΙP 65 2W Wattage Lumen output 120 230V Connection Driver Included built-in

CRI Life Time **Cut-out Size** Dimmensions Adjustable

>80 30.000 h Ø75 h38mm Ø80 h38mm No







70006.1.30.5.**

Dimmable*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70006	1	30 3000	5 Asymetric	O 10 White	NDI* Driver included (non-dimmable)
				20 Black	(non-diminable)



Supplied with 200cm cable

Recessed wall









WIRELESS

Installation Indoor / Outdoor **Mounting Position** Wall recessed ΙP 65 Wattage 1,5W Lumen output 170 230V Connection Driver Included built-in

Dimmable* Non-dimmable CRI Life Time **Cut-out Size** Dimmensions Adjustable

>90 40.000 h Ø68 h71mm Ø75 h53mm No







70702.1.**.*.

Number	w	Colour Temperature	Light Distribution	Finish	Dim
70702	1	30 3000	5 Asymetric	10 White	NDI* Driver included (non-dimmable)
				20 Black	(non-anninable)



Supplied with 200cm cable Recessing box included

Surface





OUTDOOR



InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage2,2WLumen output204Connection230VDriverIncluded built-in

Driver Included built-in

Dimmable Touch dimmable


 CRI
 >85

 Life Time
 20.000 h

No

Cut-out Size - 102x102 h340mm

Adjustable





80004.3.30.5.**

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80004	3	30 3000	6 Opal	O 10 White	TDI
				20 Black	

Portable LED light 2x2200mAh lithium battery Charge time 6-8 hours

Work time 12 hours Touch switch dimmable





Power adapter included Ø 75mm Recharging base included

Surface







Installation Indoor / Outdoor **Mounting Position** Surface 54 Wattage 2,2W Lumen output 204 230V Connection Driver Included built-in

Dimmable Touch dimmable CRI

Life Time **Cut-out Size**

Dimmensions


Adjustable

>85

20.000 h

140x140 h540mm


No



80005.3.30.5.**

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80005	3	30 3000	6 Opal	O 10 White	TDI

20 Black







Power adapter included Ø 75mm Recharging base included

Surface







InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage7WLumen output390Connection230VDriverIncluded built-in

Driver Included built-in

Dimmable* Non-dimmable


 CRI
 >85

 Life Time
 30.000 h

 Cut-out Size

 Dimmensions
 142x142 h340mm

No





80006.7.30.6.**.NDI

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80006	7	30 3000	6 Opal	● 20 Black	NDI* Driver included (non-dimmable)

Adjustable

Lucerna 50 230V

80007

Surface





OUTDOOR



 Installation
 Indoor / Outdoor

 Mounting Position
 Surface

 IP
 54

 Wattage
 7W

 Lumen output
 390

 Connection
 230V

Driver Included built-in
Dimmable* Non-dimmable

 CRI
 >85

 Life Time
 30.000 h

 Cut-out Size

Dimmensions 142x142 h500mm
Adjustable No





80007.7.30.6.**.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80007	3	30 3000	6 Opal	● 20 Black	NDI* Driver included (non-dimmable)

Surface









Installation Indoor / Outdoor **Mounting Position** Surface 54 7W Wattage Lumen output 220 230V Connection Driver Included built-in

Non-dimmable

CRI >85 Life Time 30.000 h **Cut-out Size** Dimmensions 126x125 h250mm Adjustable

No





80009.7.30.6.**.NDI

Dimmable*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80009	7	30 3000	6 Opal	20 Black	NDI* Driver included (non-dimmable)

Simetrix

80808

Surface





Installation Indoor / Outdoor **Mounting Position** Surface 65 2x3W Wattage Lumen output 37 230V Connection

Driver Included built-in Dimmable* Non-dimmable

Life Time **Cut-out Size**

CRI

Dimmensions Adjustable

>80 30.000 h

85x88 h117mm

No



80808.6.30.1.20.NDI

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80808	6	30 3000	1 Narrow	20 Black	NDI* Driver included (non-dimmable)

Surface







OOR SURFAC

InstallationIndoor / OutdoorMounting PositionSurfaceIP65Wattage3WLumen output37Connection230V

Driver Included built-in
Dimmable* Non-dimmable

CRI

Life Time Cut-out Size


Dimmensions Adjustable >80

30.000 h

_


55x75 h105mm

Yes



80022.6.30.1.20

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80022	3	30 3000	1 Narrow	10 White	NDI* Driver included
				20 Black	(non-dimmable)

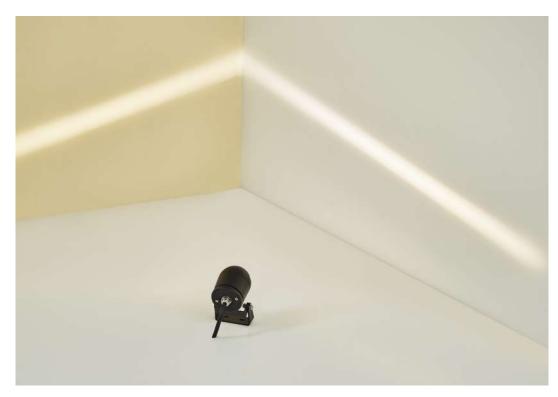



Surface





DOOR SURFACE


InstallationOutdoorMounting PositionSurfaceIP65Wattage6Lumen Output450Connection230

Driver Included built-in
Dimmable* Non-dimmable

CRI >80 Life Time 20.000 h

Cut-out Size

Dimmensions 160x160 h30mm



80020.6.30.5.60

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80020	6	30 3000	5 Asymetric	● 60 Dark Grey	NDI* Driver included (non-dimmable)





Vallum Small G000 NIGHT

80021

Surface







OOR SURFAC


InstallationOutdoorMounting PositionSurfaceIP65Wattage3Lumen Output250Connection230

Driver Included built-in
Dimmable* Non-dimmable

CRI >80 **Life Time** 20.000 h

Cut-out Size

Dimmensions 105x106 h22mm



80021.3.30.5.60

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80021	3	30 3000	5 Asymetric	● 60 Dark Grey	NDI* Driver included (non-dimmable)



Surface







Installation Indoor / Outdoor **Mounting Position** Surface ΙP 54 6W Wattage Lumen output 650 230V Connection

Driver Included built-in Dimmable* Non-dimmable

CRI


Life Time 30.000 h **Cut-out Size**

Dimmensions Adjustable

>80

Ø118 h35mm No

upon request



75002.6.**.5.**.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75002	6	30 3000	5 Asymetric	○ 10 White	NDI* Driver included
		40 4000		● 60 Dark Grey	(non-dimmable)
				AO Corten	
				Other finishes availab	ole



Surface



Non-dimmable





InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage6WLumen output650Connection230VDriverIncluded built-in


 CRI
 >80

 Life Time
 30.000 h

 Cut-out Size

 Dimmensions
 115x115 h35mm

 Adjustable
 No



75002.3.**.5.**.NDI

Dimmable*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75002	6	30 3000	5 Asymetric	O 10 White	NDI* Driver included
		40 4000		● 60 Dark Grey	(non-dimmable)
				A0 Corten	
				Other finishes availab	ole

upon request



Surface







Non-dimmable

InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage6WLumen output130Connection230VDriverIncluded built-in


 CRI
 >80

 Life Time
 30.000 h

 Cut-out Size

 Dimmensions
 Ø150 h35mm

 Adjustable
 No



75004.6.**.5.**.NDI

Dimmable*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75004	6	30 3000	5 Asymetric	O 10 White	NDI* Driver included (non-dimmable)
				Other finishes avai	ilable

Big Bacilis Q **GOOD NIGHT**

75005

Surface








Non-dimmable

Installation Indoor / Outdoor **Mounting Position** Surface 54 6W Wattage Lumen output 130 230V Connection Driver Included built-in

CRI >80 Life Time 30.000 h **Cut-out Size** 150x150 h35mm Dimmensions Adjustable No



75XXX.6.30.5.**

Dimmable*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75005	6	30 3000	5 Asymetric	O 10 White	NDI* Driver included (non-dimmable)
				Other finishes availab upon request	,









OUTDOOR





CASAMBI

AMBI WIRELESS



>90

30.000 h

InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage2 x 3WLumen output600Connection230V

Driver Included built-in
Dimmable* Non-dimmable

CRI
Life Time
Cut-out Size
Dimmensions

Dimmensions 100x100 h110mm Adjustable Yes





30071.6.30.X. **.NDI

Number	w	Colour Temperature	Light Distribution	Finish	Dim
	6	30 3000	X 0° a 120°	Exterior & Interior	NDI* Driver included
				O 11 White & White	(non-dimmable)
				26 Black & Dark Grey	
				31 Aluminium & White	
				O 41 Gold & White	
				66 Dark Grey & Dark gre	еу
				A1 Corten & White	
				O B1 Copper & White	
				RO RAL Chart	

Surface



Surface







InstallationOutdoorMounting PositionSurfaceIP65

Wattage GU10 x 2 lamps

Lumen output

Connection GU10-230V

Driver Not necessary


Dimmable GU10

 CRI
 GU10 x2

 Life Time
 GU10 x2

Cut-out Size Ø65x170 h106mm

Dimmensions -Adjustable 041



80015.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80015	GU10 x 2 lamps	XX	х	O 10 White	Depending on lamp
				60 Dark Grey	



PROJECT: SANDRA SOLER ESTUDIO / PHOTO: MARC TORRA



Available SORAA lamps





PROJECT: SANDRA SOLER ESTUDIO / PHOTO: MARC TORRA

Surface





OOOR SURFAC

InstallationIndoor / OutdoorMounting PositionSurfaceIP54WattageGU10Lumen outputGU10Connection230VDriverNot requiredDimmableDepending on lamp

CRI Life Time Cut-out Size Dimmensions Adjustable GU10 GU10 -83x65 h80mm No





80016.GU10.X.X.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80016	GU10	Depending on lamp	Depending on lamp	O 10 White	Depending on lamp
				● 60 Dark Grey	
				AO Corten	
				Other finishes availab upon request	ole



Surface









Installation Indoor / Outdoor **Mounting Position** Surface 54 GU10 Wattage Lumen output GU10 230V Connection Driver Not required Depending on lamp Dimmable

CRI Life Time **Cut-out Size** Dimmensions Adjustable

GU10 GU10 80x65 h80mm No





80016.GU10.X.X.**

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80016	GU10	Depending on lamp	Depending on lamp	O 10 White	Depending on lamp
				● 60 Dark Grey	
				AO Corten	
				Other finishes availab upon request	le



Surface







Depending on lamp

Installation Indoor / Outdoor **Mounting Position** Surface ΙP 54 2 x GU10 Wattage Lumen output 2 x GU10 230V Connection Driver Not required

CRI Life Time **Cut-out Size** Dimmensions Adjustable

GU10 GU10 83x65 h150mm No






80018.GU10.X.X.**

Dimmable

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80018	GU10	Depending on lamp	Depending on lamp	O 10 White	Depending on lamp
				● 60 Dark Grey	
				AO Corten	
				Other finishes availa upon request	ble




Surface





InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage2 x 6WLumen output1400Connection230VDriverNot requiredDimmable*Non-dimmable

CRI Life Time Cut-out Size Dimmensions Adjustable >80 30.000 h -114x34 h90mm No



80085.12.**.*.NDI

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80085	12	30 3000	6 Opal	O 10 White	NDI* Driver included
		40 4000		60 Dark Grey	(non-dimmable)
				A0 Corten	
				Other finishes availa upon request	ble

Surface







InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage2 x 6WLumen output2 x 700Connection230VDriverNot requiredDimmable*Non-dimmable

CRI Life Time Cut-out Size Dimmensions Adjustable >80 30.000 h

174x34 h90mm No





80086.12.**.*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80086	12	30 3000	6 Opal	O 10 White	NDI* Driver included
		40 4000		● 60 Dark Grey	(non-dimmable)
				AO Corten	
				Other finishes availab upon request	ble

Surface







Installation Indoor / Outdoor **Mounting Position** Surface ΙP 54 2 x 3W Wattage Lumen output 700 230V Connection Driver Not required Dimmable Non-dimmable

CRI Life Time Cut-out Size

Cut-out Size Dimmensions Adjustable >80

30.000 h

173x85 h65mm No



173



80010.6**.X.**.NDI

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80010	6	30 3000 40 4000	8 Eliptical	10 White60 Antracita	NDI Driver included (non-dimmable)



Other finishes available upon request

Surface







JOK JOKI AGE

Installation	Indoor / Outdoor			
Mounting Position	Surface			
IP	54			
Wattage	15W			
Lumen output	1180			
Connection	230V			
Driver	Not required			
Dimmable*	Non-dimmable			

 CRI
 >80

 Life Time
 50.000 h

 Cut-out Size

 Dimmensions
 Ø80 h45mm

 Adjustable





80011.15.**.*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80011	15	30 3000	2 Medium	○ 10 White	NDI* Driver included
		40 4000		20 Black	(non-dimmable)



Surface / Spike





InstallationOutdoorMounting PositionSurface / SpikeIP65Wattage3WLumen output320Connection230VDriverNot requiredDimmable*Non-dimmable


 CRI
 >85

 Life Time
 30.000 h

 Cut-out Size

 Dimmensions
 Ø45x78 h100

Ø45x78 h100mm Yes



80008.3.30.*.20

Number	w	Colour Temperature	Light Distribution	Finish	Dim
80008	3	30 3000	1 Narrow 10° 2 Medium 30°	20 Black	NDI* Driver included (non-dimmable)
Cable Length: 5	m				

Adjustable



80008.A.1.20





Surface





InstallationIndoor / OutdoorMounting PositionSurfaceIP54Wattage5WLumen output274Connection230VDriverIncluded built-inDimmable*Non-dimmable

 CRI
 >80

 Life Time
 50.000 h

 Cut-out Size

 Dimmensions
 Ø50 h125mm

 Adjustable

125

80031.5.**.2.20.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80031	5	30 3000	2 Medium 38°	● 20 Black	NDI* Driver included
		40 4000			(non-dimmable)



Surface







OOR SURFAC

InstallationOutdoorMounting PositionSurfaceIP65Wattage40WLumen Output4100Connection230V

Driver Included built-in
Dimmable* Non-dimmable

CRI Life Time

Cut-out Size

Dimmension 900x90 h74mm

Adjustable

No

>80

50.000 h

80002.40.30.6.10

Number	W		Colour Temperature	Ligh	t Distribution	Finish	Dim	
80002	40	30	3000	•	6 Opal	O 10 White	NDI*	Driver included (non-dimmable) Dimmable driver upon request



Surface / Suspended









Installation Outdoor **Mounting Position** Surface / Suspended Wattage 30 Lumen output 3800 230V Connection Driver Included built-in Dimmable* 1-10 V


CRI Life Time **Cut-out Size** Dimmensions Adjustable

>80 50.000 h



Ø80 900mm

No



80003.30.30.6.70

Number	W	Colour Temper	rature Light Distribution	Finish	Dim
80003	30	30 3000	6 Opal	70 Chrome	NDI* Driver included (non-dimmable)
					Dimmable driver upon request

Suspended kit included







Transparent version available



MAS DE VALLALTA / PROJECT: DAMIÁN SÁNCHEZ



MAS DE VALLALTA / PROJECT: DAMIÁN SÁNCHEZ

GOOD NIGHT

Good Night Lighting Special Products is the result of a passion for light, of a deep knowledge about lighting and a long experience in lights. It comes with the intention to bring good light to all areas, to make them more pleasant and appealing, by adapting to their particular needs and making lighting synonymous with beauty and atmosphere.

We understand our products as quality lighting solutions based on technology, design and awareness of light that only experience can provide. Our lights are carefully selected to meet the requirements that allow us to fulfill our commitment in terms of comfort, quality and guarantee

Contact us

Good Night Lighting Santiago Rusiñol, 14 nave B5 Pol. Ind. Can Humet de Dalt 08213 - Polinyà Barcelona

+34 935 285 434 info@goodnight-lighting.com www.goodnight-lighting.com

GOOD NIGHT

Graphic design EXITDESIGN

Product photography EXITDESIGN

Good Night assumes no liability or responsibility for any errors or omissions in the content of this catalogue.

Good Night reserves the right to alter any model or characteristics without prior notice.

This catalogue replaces all previous catalogues.

Good Night $\!\!^{\scriptscriptstyle{(\! g)}}\!\!$ is a registred trademark.

