


GOOD NIGHT


Systems

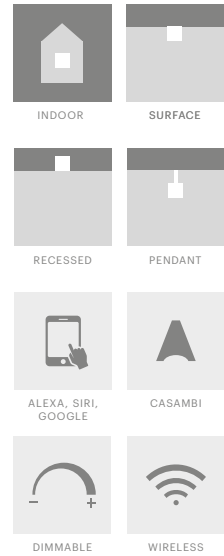

SSR is a system that is smart, modular and very easy to install in its 3 usual positions: pendant, surface and recessed.

Its magnetic system allows for great flexibility with the lighting design of each space, and lets us decide at the last moment which models we are going to use in the interior. We can install the frame at the time we think it is more convenient from a logistic and construction point of view, because we know we can install the light at the last minute without the need for screws or any kind of tool. And on top of that, the end user has the possibility to change the lighting design of his room depending on the needs of each moment.

These qualities make the SSR system one of the most adaptable to current needs, plus we should always keep in mind that it also adjusts well to different kind of budgets.

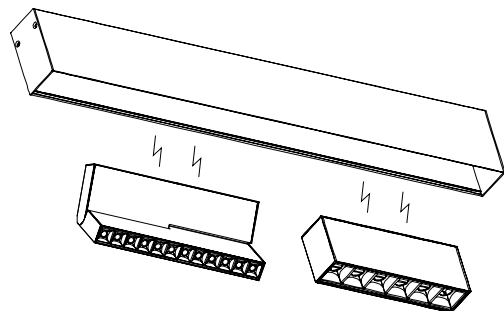


Recessed / Surface / Pendant




PROJECT: SANDRA SOLER STUDIO / PHOTO: JORGE DE JORGE


Surface

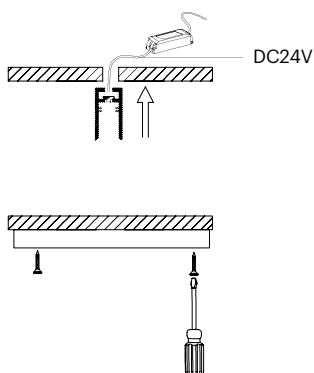

Recessed

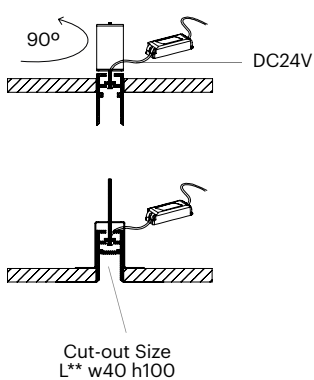

Pendant

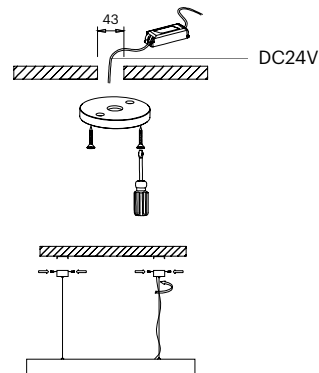


SSR Magnet


550

GOOD NIGHT


Smart System




SSR-Q1



SSR-Q3



SSR-Q6

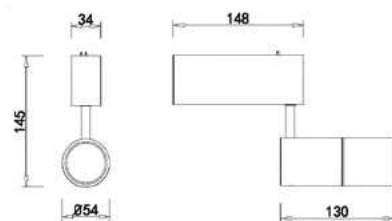


SSR-PJ13


Recessed / Surface / Pendant




SSR-Opal 10



SSR-Opal 30

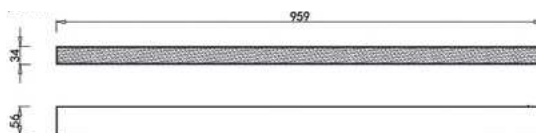

SSR-AD6

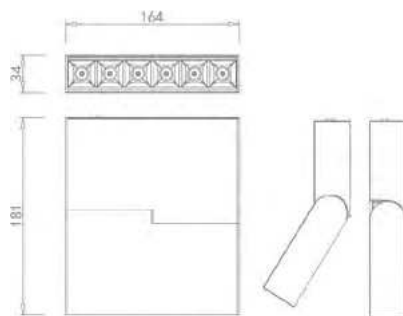


Installation	Indoor	CRI	>85
Mounting Position	Recessed, Surface, Pendant	Life Time L70	30.000
IP	20		

Connection	24VDC
Driver	Remote - Page 221
Dimmable	Dimmable drivers on page 221

1. Profile

Reference	Description	Finish
55010.20.M	Track-S Surface / Recessed / Pendant	● 20 Black
55011.20	End Cap (2 units)	● 20 Black
5509.20.M	Blank Cover (Optional)	● 20 Black

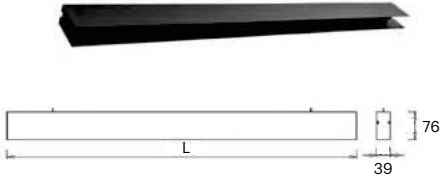


**Maximum wattage: 120W

2. Modules 24V DC

Reference	Description	W	CCT	Light Distribution	Finish	Lumen Output
55190.10.27.6.20.NDI	SSR-Opal 10	10	2.700K	Opal 120°	Black	400 lm
55191.30.27.6.20.NDI	SSR-Opal 30	30	2.700K	Opal 120°	Black	1250 lm
55201.1.27.2.20.NDI	SSR-Q1	1	2.700K	Medium 35°	Black	85 lm
55203.3.27.2.20.NDI	SSR-Q3	3	2.700K	Medium 35°	Black	200 lm
55206.6.27.2.20.NDI	SSR-Q6	6	2.700K	Medium 35°	Black	420 lm
55226.6.27.2.20.NDI	SSR-AD6	6	2.700K	Medium 35°	Black	420 lm
55110.15.27.2.20.NDI	SSR-PJ13	15	2.700K	Medium 30°	Black	725 lm


3. Connections

Reference	Description
55031	Connections Slice of MG Track (1unit / 3m)
55032	90° Horizontal Corner
55035	90° Vertical Corner



4. Fixations / Mounting Kits

Reference	Description	Cut-out Size
55023	Recessed kit (1 unit / 1'5m) includes 2 brackets	W40 x L x H100 mm
55022.20	Suspension kit (1 unit / 1'5m) includes 2 wires and feeding cable	



5. Driver

Drivers on page 221



PROJECT: SANDRA SOLER STUDIO / PHOTO: JORGE DE JORGE




*Custom configuration available upon request




VILAR RIBA / PROJECT: SANDRA SOLER STUDIO


Ocultus is made up of a design of hidden aluminum tucked away within the ceiling that offers useful and discrete lighting capacities. Ocultus is designed to be out of sight while incorporating projectors that illuminate from within or, if desired, they can also be visible in any type of space inside of a store, museum, houses, etc...

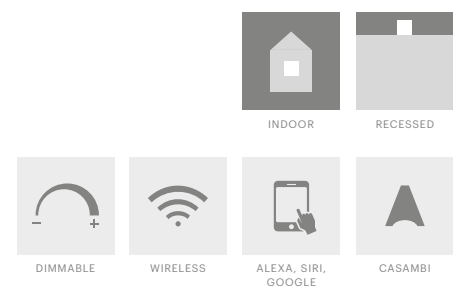

*Remote Driver. Custom configuration available upon request

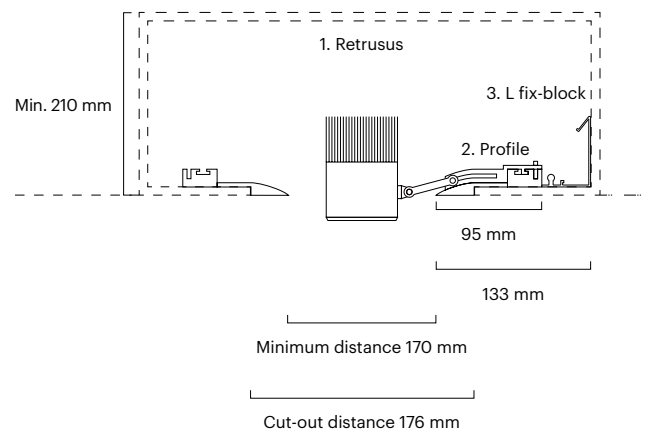


Recessed


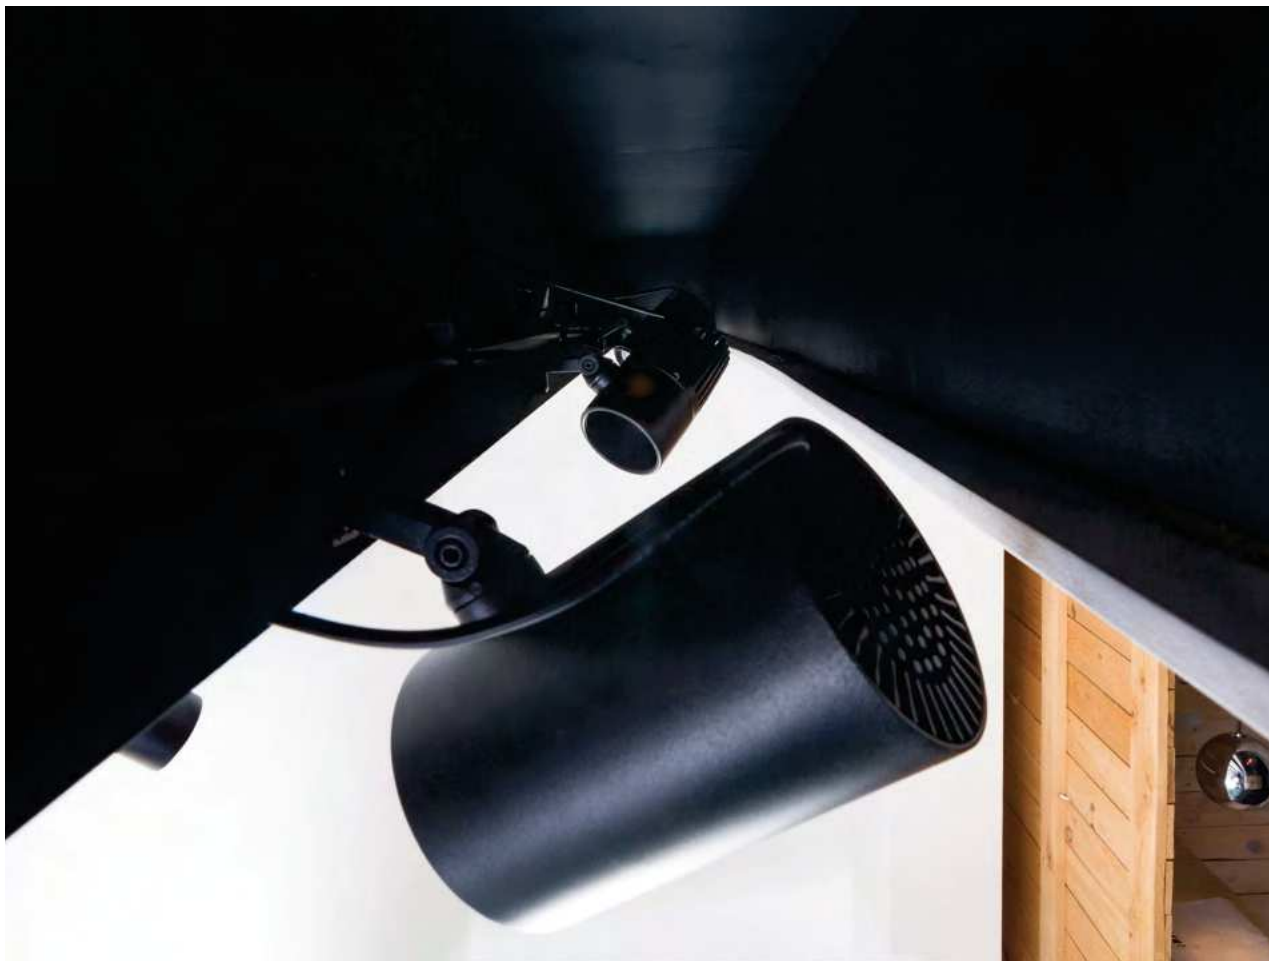


Installation	Indoor
Mounting Position	Recessed
IP	20

CRI	>85
Life Time L70	30.000



Wattage	15W 26W
Connection	700mA
Driver	Included (remote)
Dimmable	1-10V dimming Dali dimming Non-dimmable







Ocultus Profile

1. Profile



Ocultus codification	Model	Finish
Ocultus profile	40001.20.M	● 20 Black
Ocultus L fix-block	40001.A.1	
90° corner cut	40002	



*Linear LED available upon request

Ocultus Spot

2. Retrusus

Ocultus codification	Model	W	K	Light distribution	Finish	Lumen output	Dimension
Retrusus-70	40015	15	2700	 1 Narrow 15°	● 20 Black	1100	Ø65 L110
				 2 Medium 24°			
				 3 Wide 36°			
Ocultus codification	Model	W	K	Light distribution	Finish	Lumen output	Dimension
Retrusus-80	40026	26	3000	 1 Narrow 15°	● 20 Black	2500	Ø81 L122
				 2 Medium 24°			
				 3 Wide 36°			


3. Driver

Driver Retrusus-70 113 x 42 x 31 mm (Remote included)
 Driver Retrusus-80 103 x 65 x 31 mm (Remote included)

*Dimmable driver on page 221



40001.A.1 (1 unit / 1m)

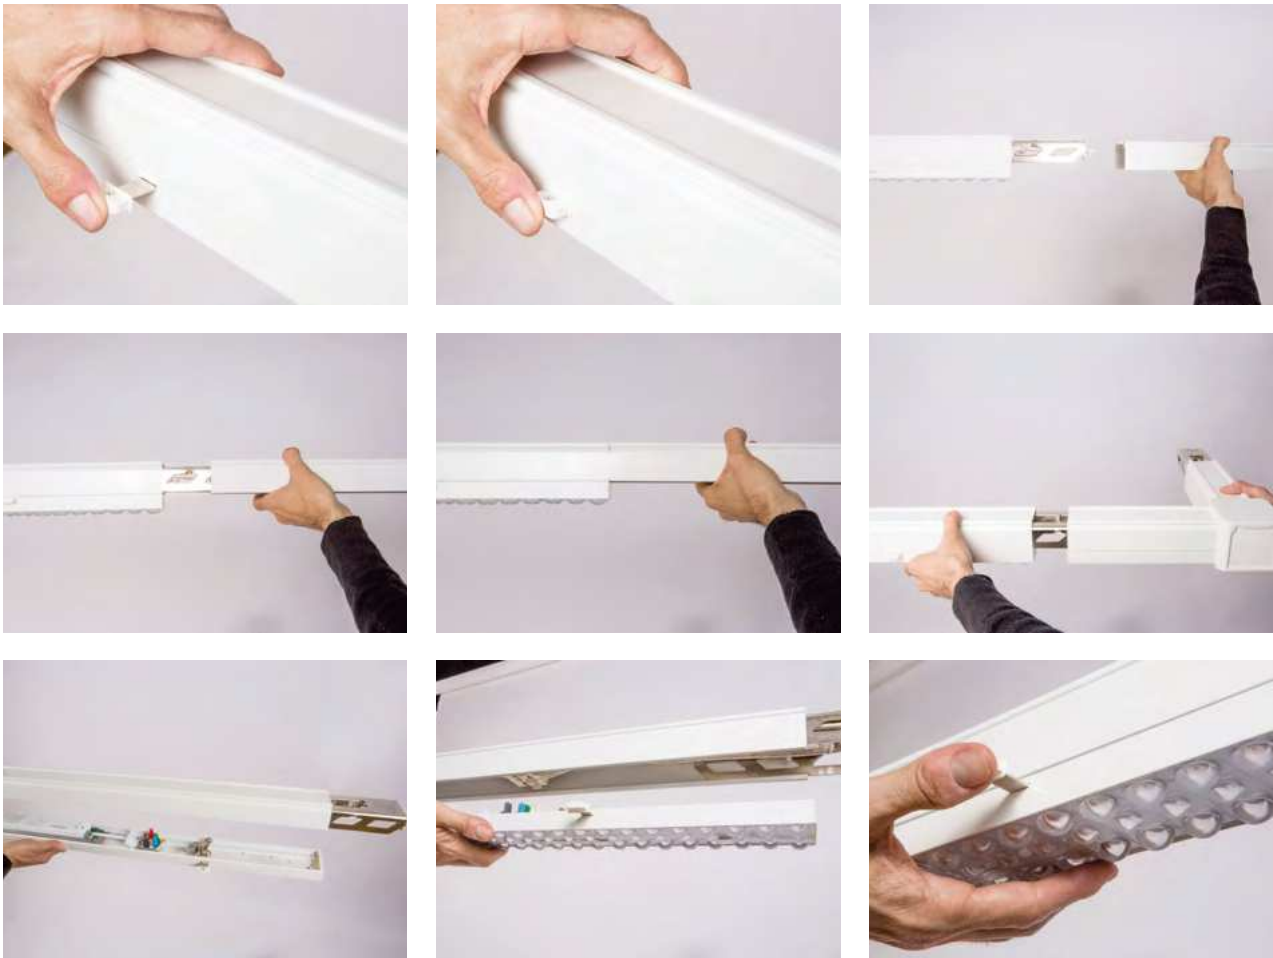

Sabrolumo is a linear lighting system with endless combinations. With seamless, multilighting distribution and various bracket accessories, Sabrolumo offers a different lighting system option that allows you to illuminate anywhere you need. Up to 130 lm/W efficacy provides the lighting designer with a perfect lighting solution for many building-wide applications. With function of dimming 1-10V, DALI and emergency line, Sabrolumo is a truly intelligent lighting system.

















ELS GALONS / PROJECT: SANDRA SOLER STUDIO / PHOTO: JORDI PUIG PX77



1. Module

Sabrolumo codification	Model	Length mm	W	K	Light distribution	Dimm
Lens 75w 3000K 30°	44157	1437	25 - 75	30	 2	D10
Lens 75w 3000K 60°	44157	1437	25 - 75	30	 3	D10
Lens 75w 3000K 90°	44157	1437	25 - 75	30	 4	D10
Lens 75w 3000K Asy Left	44157	1437	25 - 75	30	 5L	D10
Lens 75w 3000K Asy Right	44157	1437	25 - 75	30	 5R	D10
Lens 75w 3000K Asy Doble	44157	1437	25 - 75	30	 5D	D10
Lens 75w 4000K 30°	44157	1437	25 - 75	40	 2	D10
Lens 75w 4000K 60°	44157	1437	25 - 75	40	 3	D10
Lens 75w 4000K 90°	44157	1437	25 - 75	40	 4	D10
Lens 75w 4000K Asy Left	44157	1437	25 - 75	40	 5L	D10
Lens 75w 4000K Asy Right	44157	1437	25 - 75	40	 5R	D10
Lens 75w 4000K Asy Doble	44157	1437	25 - 75	40	 5D	D10
Blank cover 1200mm	44927	1150				
Blank cover 1500mm	44957	1437				
Spotlight module	44980	1437 (track lenght: 650mm)				

Lumen output 160lm/W



*PIR and daylight sensor available upon request
Emergency battery available upon request

2. Trunk



Sabrolumo codification	Model
Electrical module 1437mm	44012
Electrical module 2874mm	44015

3. Electrical Feeding

Sabrolumo codification	Model
Connection Wires 7x2,5mm ²	44901
Terminal feed with box 7x2,5mm ²	44911

4. Fixing



Sabrolumo codification	Model
Surface ceiling kit	44902
Steel Cable suspension Kit	44903
Chain suspension Kit	44904

5. Nodes & Endcaps



Sabrolumo codification	Model
"L" - L connection	44906
"T" - T connection	44907
"+" - X connection	44908
Endcaps 005	44920
Endcapbox 005s	44921

*Custom configuration available upon request

High Output Profiles

Mitis
Page 140



Cubus
Page 162



Remissis-v
Page 144



Versatile-s
Page 150



Versatile-r
Page 156



Compact Profiles


Abscondere
Page 168



Aresta
Page 172




Sella
Page 144



Murus
Page 178




Flexibilis
Page 182



Totus
Page 186



Angulus
Page 190



Refundus-p
Page 194



Refundus-i
Page 196



Refundus-e
Page 198



Big Refundus-p
Page 200



Opticus
Page 202



Minimus 2
Surface
Page 206



Minimus 2-r
Recessed
Page 210



Big Minimus
Page 214




Configuration example

Versatile-s


GOOD NIGHT

453


High Output Profiles




Versatile-s Flat



Versatile-s Out




Versatile-s Flat



Versatile-s Out



1. Profile

Reference	Description	Mounting	Finish
453.00.10.M	Versatile-s	Surface / Pendant	○ 10 White
453.00.20.M			● 20 Black
453.00.30.M			● 30 Aluminium



2. Cover


Reference	Description
453.01.01.M	Flat opal diffuser
453.01.02.M	Flat Microprismatic diffuser
453.02.01.M	Out opal diffuser

154 www.goodnight-lighting.com

Reference example →

Reference example →



Description

Profile	Versatile-S	LED	2.000 lm/m 2700K
Lenght	5,2m	Driver	Dimmable 1-10V
Finish	White	Mounting	Pendant
Cover	Opal out		

Versatile-s

453

GOOD NIGHT

High Output Profiles

4. Endcap

Reference	Description	Type	Finish
453.11.10	End cap (2 units)	Flat difusser	○ 10 White
453.11.20	End cap (2 units)	Flat difusser	● 20 Black
453.11.30	End cap (2 units)	Flat difusser	● 30 Aluminium
453.12.10	End cap (2 units)	Out difusser	○ 10 White
453.12.20	End cap (2 units)	Out difusser	● 20 Black
453.12.30	End cap (2 units)	Out difusser	● 30 Aluminium



Reference example

5. Mechanical Connections

Reference	Description
453.31	180° linear connection (when no longer than 2'5m)
453.32	90° connection
453.33.XXX	Custom connection

Reference example

6. Fixations / Mounting Kits

Reference	Description
453.21	Surface clip (1 unit / 1'5m)
453.22	Suspension kit (1 unit / 1,5m) (length 2m)
453.25	Wall bracket (1 unit / 1'5m)




Reference example


Components	Units	Reference
1. Profile	5,2	453.00.10.M
2. Cover	5,2	453.02.01.M
3. LED & Driver	5,2	453.05.2000.27.D10.M
4. Endcap	1	453.12.10

Components	Units	Reference
5. Mechanical Connections	1	453.31
6. Fixations / Mounting Kits	4	453.22
7. Electrical Feeding	1	453.42.10




MITIS is a recessed system that achieves the softness and the visual comfort that we are rarely able to get with the usual models in the market. Its soft light, which can be warm or cool depending on our mood, gives us high quality light and at the same time, aesthetics that allow us to play around with interior design. With its different power settings plus its double light system, we can achieve effects that are both highly visual and able to give us the peace-and-quiet feeling that we so often look for.

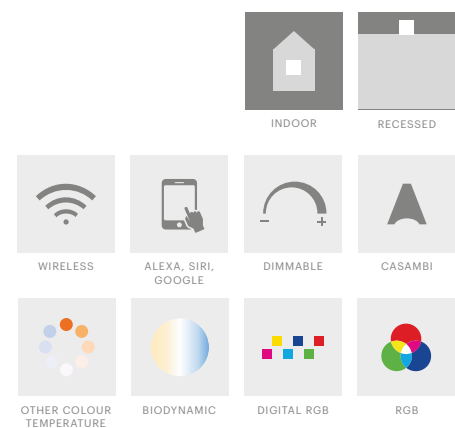

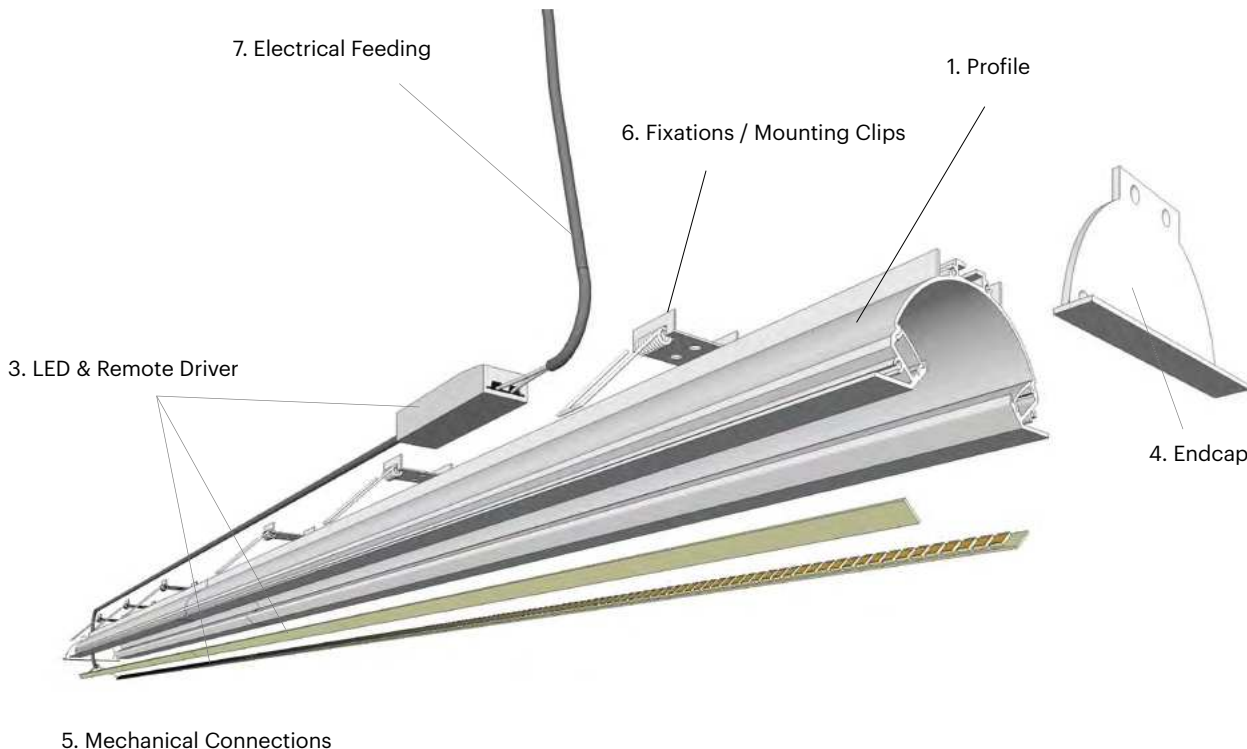

Dimensions	Cut-out Size	Finish	Mounting
 	w90xh70mm	<ul style="list-style-type: none"> ○ 10 White ● 30 Aluminium 	 <p>RECESSED</p>

1. Profile


Reference	Description	Mounting	Finish	
451.00.10.M	Mitis	Recessed	○ 10 White	
451.00.30.M			● 30 Aluminium	

2. Cover

Internal diffuser included.


3. LED & Driver

Reference	Wattage	LED Lm Output	CCT	CRI	Driver	Dimming
451.05.1000.30.NDI.M	2x15 W/m	2x1.000 lm/m	3.000K	>90	Remote driver included	NDI Non-dimmable
451.05.1000.40.NDI.M	2x15 W/m	2x1.000 lm/m	4.000K	>90	Remote driver included	NDI Non-dimmable
451.05.2000.30.NDI.M	2x24 W/m	2x2.000 lm/m	3.000K	>90	Remote driver included	NDI Non-dimmable
451.05.2000.40.NDI.M	2x24 W/m	2x2.000 lm/m	4.000K	>90	Remote driver included	NDI Non-dimmable
451.05.1000.30.D10.M	2x15 W/m	2x1.000 lm/m	3.000K	>90	Remote driver included	1-10V dimm
451.05.1000.40.D10.M	2x15 W/m	2x1.000 lm/m	4.000K	>90	Remote driver included	1-10V dimm
451.05.2000.30.D10.M	2x24 W/m	2x2.000 lm/m	3.000K	>90	Remote driver included	1-10V dimm
451.05.2000.40.D10.M	2x24 W/m	2x2.000 lm/m	4.000K	>90	Remote driver included	1-10V dimm
451.05.1000.30.DAL.M	2x15 W/m	2x1.000 lm/m	3.000K	>90	Remote driver included	DALI dimm
451.05.1000.40.DAL.M	2x15 W/m	2x1.000 lm/m	4.000K	>90	Remote driver included	DALI dimm
451.05.2000.30.DAL.M	2x24 W/m	2x2.000 lm/m	3.000K	>90	Remote driver included	DALI dimm
451.05.2000.40.DAL.M	2x24 W/m	2x2.000 lm/m	4.000K	>90	Remote driver included	DALI dimm

 RGB available upon request

*Custom configuration available upon request


4. Endcap

Reference	Description	Finish	
451.11.10	End cap (2 units)	○ 10 White	
451.11.30	End cap (2 units)	● 30 Aluminium	

5. Mechanical Connections

Reference	Description
451.31	180° linear connection (when longer than 2'5m)
451.32	90° connection
451.33.XXX	Custom connection

6. Fixations / Mounting Kits


Reference	Description	
451.23	Recessed bracket (1 unit / 1'5m)	


7. Electrical Feeding & Internal Electrification

Reference	Description
451.43	Electrification for recessed mounting



With its unique, different and special design, the REMISSIS allows us to light our everyday rooms, like the kitchen, our office, the living room, workplaces, corridors, etc. Its newly blended design helps avoid glaring and reaches a visual comfort level that allows for high power without bothering the user, who will enjoy adequate levels of light without a risk of glaring. Thus, the Remissis can be used in a lot of different places where other models would end up being limited, and it can easily be integrated in any room according to the requirements of the interior designer. It can either be recessed or suspended from the ceiling.

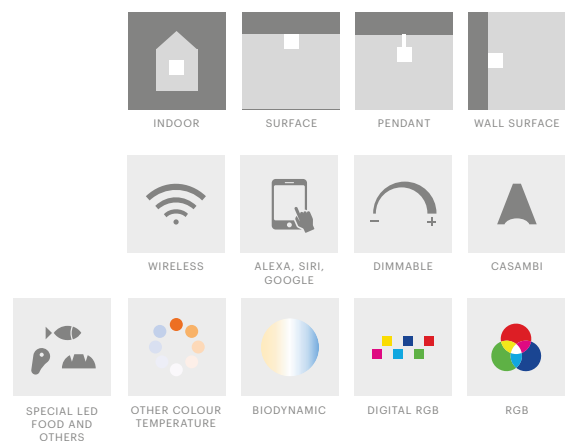


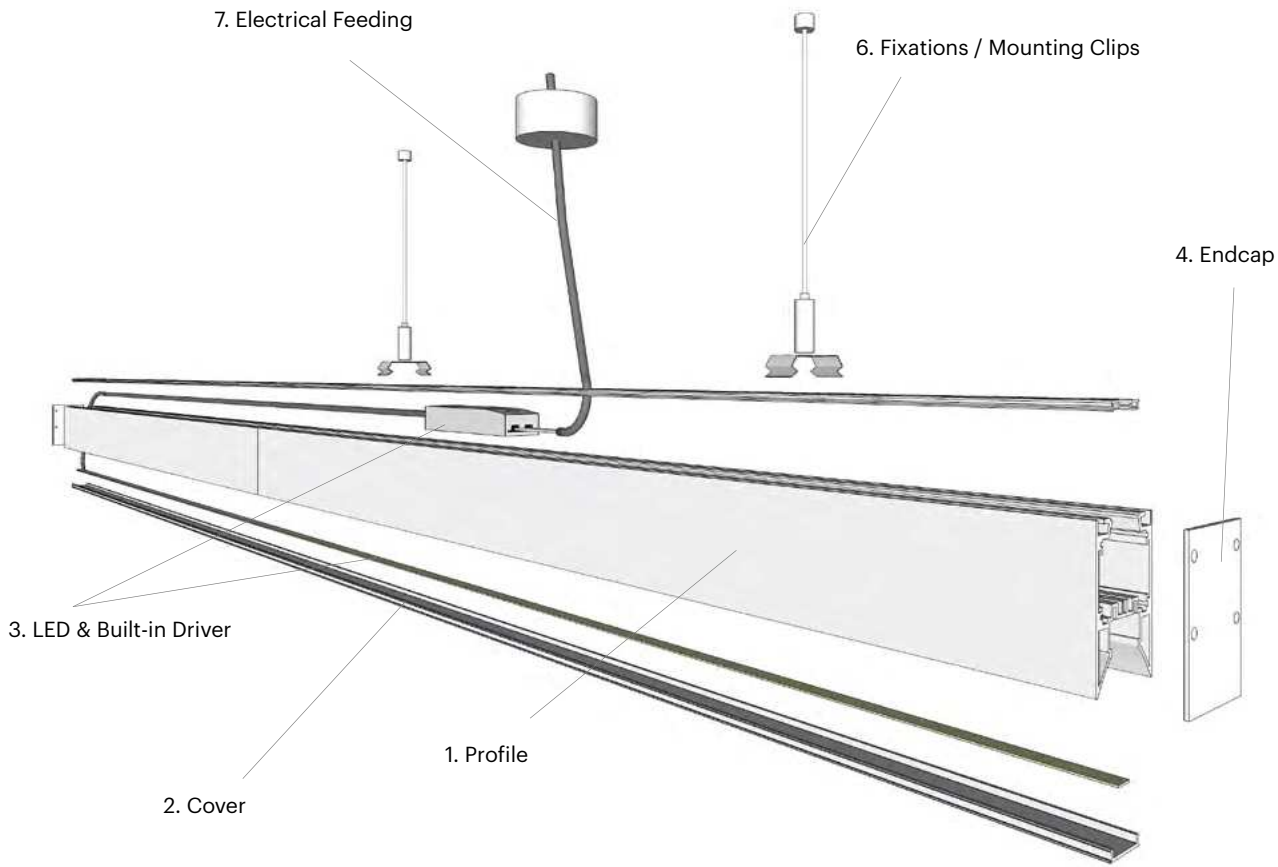


Dimensions

Finish


Mounting




- 10 White
- 20 Black
- 30 Aluminium



1. Profile

Reference	Description	Mounting	Finish	
452.00.10.M	Remissis-v	Surface / Pendant	○ 10 White	
452.00.20.M			● 20 Black	
452.00.30.M			● 30 Aluminium	

2. Cover

Reference	Description	
452.01.01.M	Opal diffuser	

3. LED & Built-in Driver

Reference	Wattage	LED Lumen Output	CCT	CRI	Driver	Dimming
452.05.1000.27.NDI.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
452.05.1000.30.NDI.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
452.05.1000.40.NDI.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
452.05.2000.27.NDI.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
452.05.2000.30.NDI.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
452.05.2000.40.NDI.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
452.05.3500.27.NDI.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
452.05.3500.30.NDI.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
452.05.3500.40.NDI.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
452.05.1000.27.D10.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	1-10V dimm
452.05.1000.30.D10.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	1-10V dimm
452.05.1000.40.D10.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	1-10V dimm

Reference	Wattage	LED Lumen Output	CCT	CRI	Driver	Dimming
452.05.2000.27.D10.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	1-10V dimm
452.05.2000.30.D10.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	1-10V dimm
452.05.2000.40.D10.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	1-10V dimm
452.05.3500.27.D10.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	1-10V dimm
452.05.3500.30.D10.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	1-10V dimm
452.05.3500.40.D10.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	1-10V dimm
452.05.1000.27.DAL.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	DALI dimm
452.05.1000.30.DAL.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	DALI dimm
452.05.1000.40.DAL.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	DALI dimm
452.05.2000.27.DAL.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	DALI dimm
452.05.2000.30.DAL.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	DALI dimm
452.05.2000.40.DAL.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	DALI dimm
452.05.3500.27.DAL.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	DALI dimm
452.05.3500.30.DAL.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	DALI dimm
452.05.3500.40.DAL.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	DALI dimm

RGB available upon request

*Custom configuration available upon request

4. Endcap


Reference	Description	Finish
452.11.10	End cap (2 units)	○ 10 White
452.11.20	End cap (2 units)	● 20 Black
452.11.30	End cap (2 units)	● 30 Aluminium



5. Mechanical Connections

Reference	Description
452.31	180° linear connection (when longer than 2'5m)
452.32	90° connection
452.33.XXX	Custom connection

6. Fixations / Mounting Kits

Reference	Description	
452.21	Surface clip (1 unit / 1'5m) + Safety wire	
452.22	Suspension kit (1 unit / 1'5m) (length 2m)	
452.25	Wall bracket	


7. Electrical feeding & Internal Electrification


Reference	Description	Finish
452.42.10	Electrification for suspension mounting	○ 10 White
452.42.20	Electrification for suspension mounting	● 20 Black
452.42.30	Electrification for suspension mounting	● 30 Aluminium
452.41	Electrification for surface mounting	








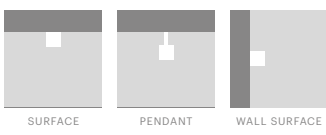


VERSATILE S and R, with the FLAT and OUT diffuser, consists of 2 interchangeable models and diffusers for just one versatile concept, as its name indicates. Either recessed (R), surface mounted or suspended (S), with the same design and with only the variation of a tiny frame for the recessed one, they all equally adapt to 2 diffusers that achieve very different looks, that can be both discrete (FLAT) or much more visual (OUT). The VERSATILE system achieves functionality and at the same time is practical, easy to install, and can be part of many day-to-day projects.

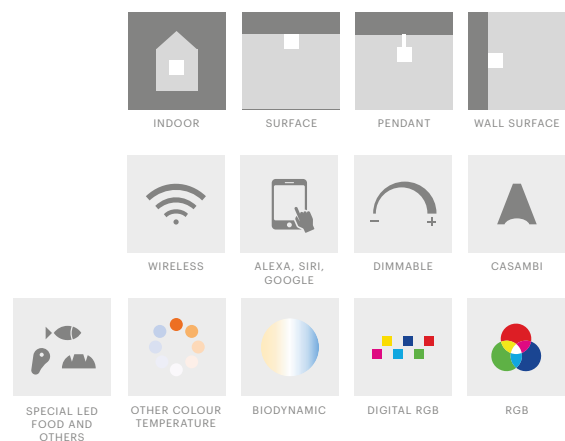

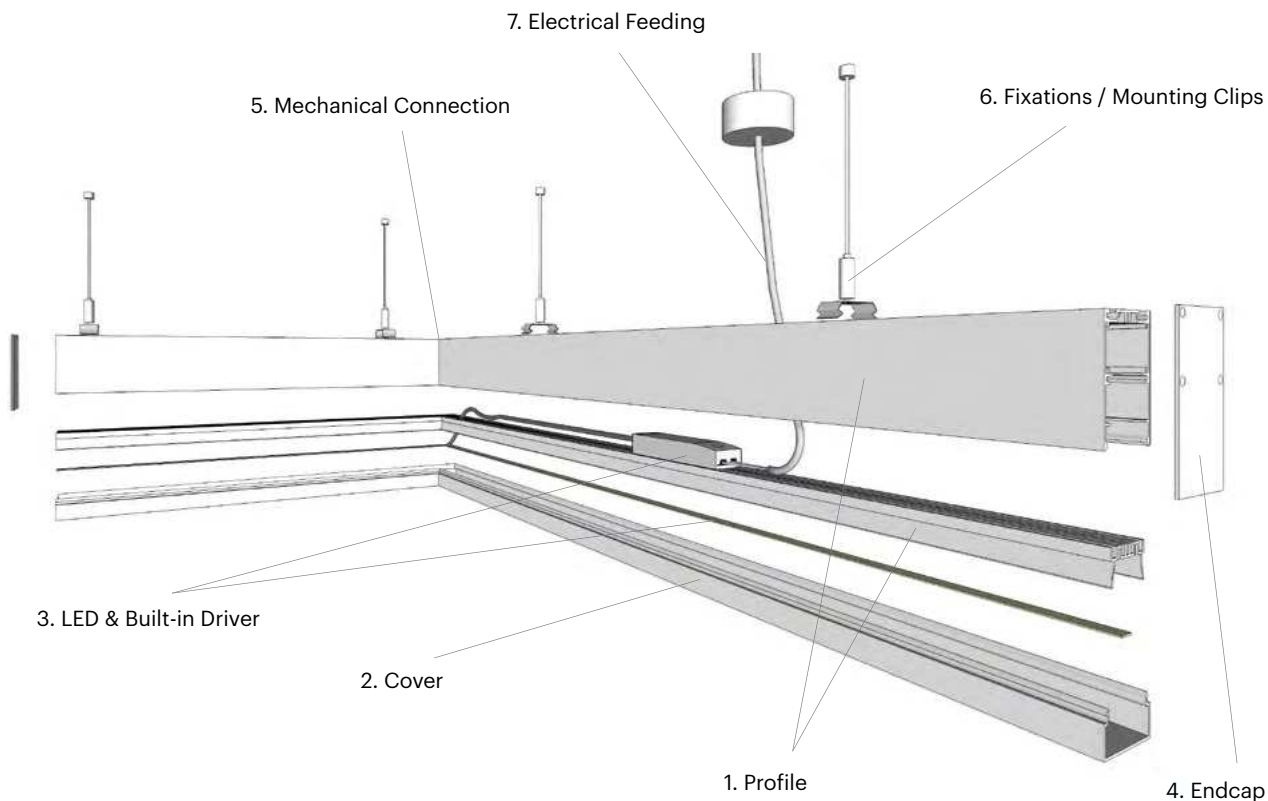

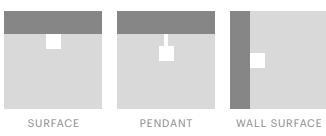Dimensions	Finish	Mounting
 	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium 	 <p>SURFACE PENDANT WALL SURFACE</p>

Dimensions	Finish	Mounting
 	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium 	 <p>SURFACE PENDANT WALL SURFACE</p>




Versatile-s Flat

Versatile-s Out

1. Profile

Reference	Description	Mounting	Finish
453.00.10.M	Versatile-s	Surface / Pendant	○ 10 White
453.00.20.M			● 20 Black
453.00.30.M			● 30 Aluminium



2. Cover

Reference	Description
453.01.01.M	Flat opal diffuser
453.02.01.M	Out opal diffuser



3. LED & Driver

Reference	Wattage	LED Lumen Output	CCT	CRI	Driver	Dimming
453.05.1000.27.NDI.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
453.05.1000.30.NDI.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
453.05.1000.40.NDI.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
453.05.2000.27.NDI.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
453.05.2000.30.NDI.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
453.05.2000.40.NDI.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
453.05.3500.27.NDI.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
453.05.3500.30.NDI.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
453.05.3500.40.NDI.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
453.05.1000.27.D10.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	1-10V dimm
453.05.1000.30.D10.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	1-10V dimm
453.05.1000.40.D10.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	1-10V dimm
453.05.2000.27.D10.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	1-10V dimm
453.05.2000.30.D10.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	1-10V dimm
453.05.2000.40.D10.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	1-10V dimm
453.05.3500.27.D10.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	1-10V dimm
453.05.3500.30.D10.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	1-10V dimm
453.05.3500.40.D10.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	1-10V dimm
453.05.1000.27.DAL.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	DALI dimm
453.05.1000.30.DAL.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	DALI dimm
453.05.1000.40.DAL.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	DALI dimm
453.05.2000.27.DAL.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	DALI dimm
453.05.2000.30.DAL.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	DALI dimm
453.05.2000.40.DAL.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	DALI dimm
453.05.3500.27.DAL.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	DALI dimm
453.05.3500.30.DAL.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	DALI dimm
453.05.3500.40.DAL.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	DALI dimm

 RGB available upon request

*Custom configuration available upon request

4. Endcap

Reference	Description	Type	Finish
453.11.10	End cap (2 units)	Flat difusser	○ 10 White
453.11.20	End cap (2 units)	Flat difusser	● 20 Black
453.11.30	End cap (2 units)	Flat difusser	● 30 Aluminium
453.12.10	End cap (2 units)	Out difusser	○ 10 White
453.12.20	End cap (2 units)	Out difusser	● 20 Black
453.12.30	End cap (2 units)	Out difusser	● 30 Aluminium



5. Mechanical Connections

Reference	Description
453.31	180° linear connection (when longer than 2'5m)
453.32	90° connection
453.33.XXX	Custom connection

6. Fixations / Mounting Kits

Reference	Description
453.21	Surface clip (1 unit / 1'5m)
453.22	Suspension kit (1 unit / 1,5m) (length 2m)
453.25	Wall bracket (1 unit / 1'5m)



7. Electrical feeding & Internal Electrification












Reference	Description	Finish
453.42.10	Electrification for suspension mounting	○ 10 White
453.42.20	Electrification for suspension mounting	● 20 Black
453.42.30	Electrification for suspension mounting	● 30 Aluminium
453.41	Electrification for surface mounting	




CLÍNICA DENTAL PONS / PROJECT: ESTUDI D'ARQUITECTURA INTERIOR MAITE PRATS



VERSATILE S and R, with the FLAT and OUT diffuser, consists of 2 interchangeable models and diffusers for just one versatile concept, as its name indicates. Either recessed (R), surface mounted or suspended (S), with the same design and with only the variation of a tiny frame for the recessed one, they all equally adapt to 2 diffusers that achieve very different looks, that can be both discrete (FLAT) or much more visual (OUT). The VERSATILE system achieves functionality and at the same time is practical, easy to install, and can be part of many day-to-day projects.

				
	INDOOR	RECESSED		
				
WIRELESS	ALEXA, SIRI, GOOGLE	DIMMABLE	CASAMBI	
				
SPECIAL LED FOOD AND OTHERS	OTHER COLOUR TEMPERATURE	BIODYNAMIC	DIGITAL RGB	RGB

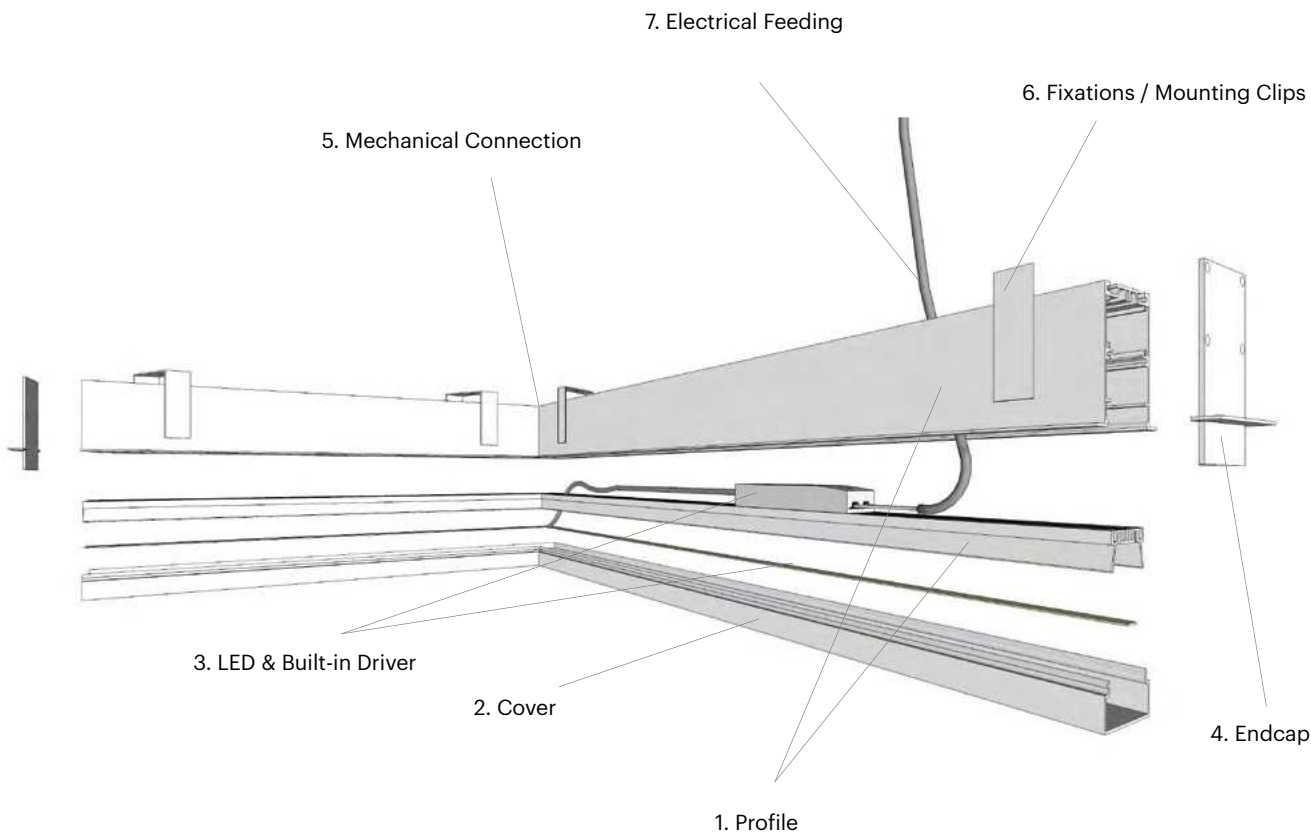

	Dimensions	Cut-out Size	Finish	Mounting
		w56xh105mm	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium 	

	Dimensions	Cut-out Size	Finish	Mounting
		w56xh105mm	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 30 Aluminium 	



Versatile-r Flat




Versatile-r Out



1. Profile

Reference	Description	Mounting	Finish
454.00.10.M	Versatile-r	Recessed	○ 10 White
454.00.20.M			● 20 Black
454.00.30.M			● 30 Aluminium




2. Cover

Reference	Description
454.01.01.M	Flat opal diffuser
454.02.01.M	Out opal diffuser



3. LED & Driver

Reference	Wattage	LED Lumen Output	CCT	CRI	Driver	Dimming
454.05.1000.27.NDI.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
454.05.1000.30.NDI.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
454.05.1000.40.NDI.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
454.05.2000.27.NDI.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
454.05.2000.30.NDI.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
454.05.2000.40.NDI.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
454.05.3500.27.NDI.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	NDI Non-dimmable
454.05.3500.30.NDI.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	NDI Non-dimmable
454.05.3500.40.NDI.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	NDI Non-dimmable
454.05.1000.27.D10.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	1-10V dimm
454.05.1000.30.D10.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	1-10V dimm
454.05.1000.40.D10.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	1-10V dimm
454.05.2000.27.D10.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	1-10V dimm
454.05.2000.30.D10.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	1-10V dimm
454.05.2000.40.D10.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	1-10V dimm
454.05.3500.27.D10.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	1-10V dimm
454.05.3500.30.D10.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	1-10V dimm
454.05.3500.40.D10.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	1-10V dimm
454.05.1000.27.DAL.M	15 W/m	1.000 lm/m	2.700K	>90	Driver included	DALI dimm
453.05.1000.30.DAL.M	15 W/m	1.000 lm/m	3.000K	>90	Driver included	DALI dimm
453.05.1000.40.DAL.M	15 W/m	1.000 lm/m	4.000K	>90	Driver included	DALI dimm
454.05.2000.27.DAL.M	24 W/m	2.000 lm/m	2.700K	>90	Driver included	DALI dimm
454.05.2000.30.DAL.M	24 W/m	2.000 lm/m	3.000K	>90	Driver included	DALI dimm
454.05.2000.40.DAL.M	24 W/m	2.000 lm/m	4.000K	>90	Driver included	DALI dimm
454.05.3500.27.DAL.M	24 W/m HE	3.500 lm/m	2.700K	>90	Driver included	DALI dimm
454.05.3500.30.DAL.M	24 W/m HE	3.500 lm/m	3.000K	>90	Driver included	DALI dimm
454.05.3500.40.DAL.M	24 W/m HE	3.500 lm/m	4.000K	>90	Driver included	DALI dimm

 RGB available upon request

*Custom configuration available upon request

4. Endcap

Reference	Description	Type	Finish
454.11.10	End cap (2 units)	Flat diffuser	○ 10 White
454.11.20	End cap (2 units)	Flat diffuser	● 20 Black
454.11.30	End cap (2 units)	Flat diffuser	● 30 Aluminium
454.12.10	End cap (2 units)	Out diffuser	○ 10 White
454.12.20	End cap (2 units)	Out diffuser	● 20 Black
454.12.30	End cap (2 units)	Out diffuser	● 30 Aluminium



5. Mechanical Connections

Reference	Description
454.31	Linear connection (when longer than 2'5m)
454.32	90° connection
454.33.XXX	Custom connection

6. Fixations / Mounting Kits

Reference	Description
454.23	Recessed kit (1 unit / 1'5m)



7. Electrical feeding & Internal Electrification

Reference	Description
454.43	Electrification for recessed mounting






HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS / PHOTO: OLGA PLANAS




POLICLINICA COMARCAL EL VENDRELL



It is the smallest of the big ones, and the biggest of the small ones. It can be used for practically anything. Works very well both with low and high power. It is highly resistant and its design ends up being almost invisible, but when it is visible (either when surface mounted or suspended), it almost goes unnoticed because of its small 35x35 mm size. It can also be recessed. In its three positions, it adapts completely to the design and the architecture of the room, and also to the needs of the designer and the end user. The CUBUS, square and small, allows for a lighting that suits practically any kind of space without attracting too much attention, and it helps us emphasize the objects we want to. Thus, it is the kind of light fixture many designers have always desired: a light with almost no luminaire.

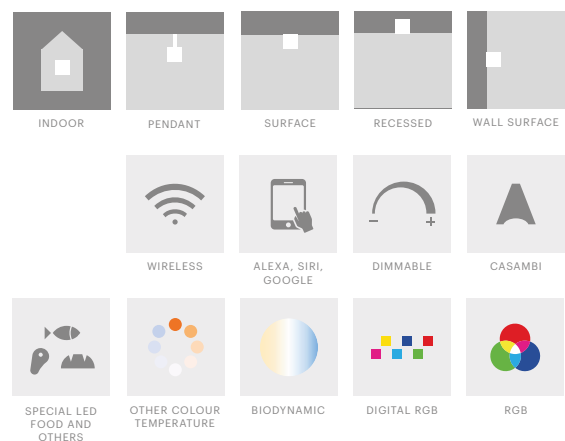


Recessed / Surface / Pendant

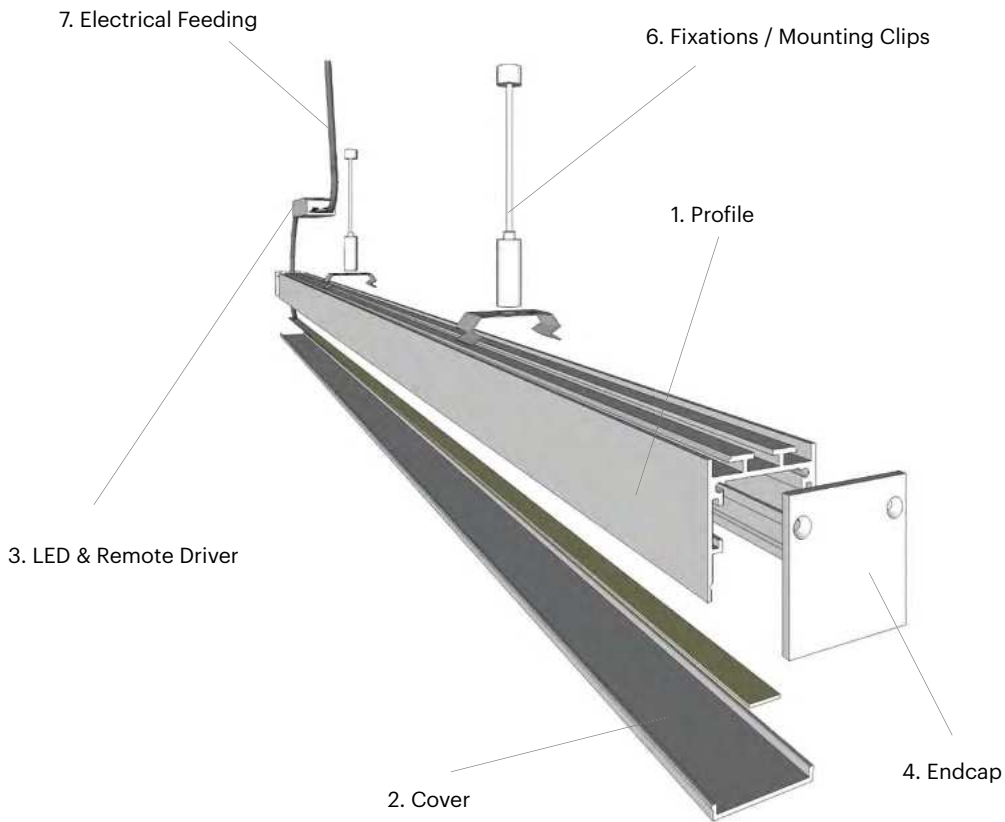


Dimensions

Cut-out Size

Mounting




w36xh40mm



1. Profile

Reference	Description	Mounting	Finish
455.00.10.M	Cubus	Recessed / Surface / Pendant	○ 10 White
455.00.20.M	Cubus	Recessed / Surface / Pendant	● 20 Black
455.00.30.M	Cubus	Recessed / Surface / Pendant	● 30 Aluminium



2. Cover

Reference	Description
455.01.01.M	Opal diffuser




3. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

Number	LED Strip	W	K	Lumen Output	Volts	IP
40213.24.67.M	Fasciola	13	2400	1000 lm/m	24V	67
40213.27.67.M	Fasciola	13	2700	1000 lm/m	24V	67
40213.30.67.M	Fasciola	13	3000	1000 lm/m	24V	67
40213.40.67.M	Fasciola	13	4000	1000 lm/m	24V	67
40221.24.67.M	Fasciola	21	2400	2000 lm/m	24V	67
40221.27.67.M	Fasciola	21	2700	2000 lm/m	24V	67
40221.30.67.M	Fasciola	21	3000	2000 lm/m	24V	67
40221.40.67.M	Fasciola	21	4000	2000 lm/m	24V	67
40214.RGB.67.M	Fasciola	14	RGB	480 lm/m	24V	67

*Other options available upon request

4. Endcap

Reference	Description	Finish
455.11.10	End cap (2 units)	○ 10 White
455.11.20	End cap (2 units)	● 20 Black
455.11.30	End cap (2 units)	● 30 Aluminium



5. Mechanical Connections

Reference	Description
455.31	Linear connection (when longer than 2'5m)
455.32	90° connection
455.53.XXX	Custom connection

6. Fixations / Mounting Kits

Reference	Description
455.08	Recessed kit (1 unit / 1'5m)
455.21	Surface clip (1 unit / 1'5m)
455.07	Suspension kit (1 unit / 1,5m) (length 2m)
455.25	Wall bracket



7. Electrical feeding & Internal Electrification

Reference	Description	Finish
455.42.10	Electrification for suspension mounting	○ 10 White
455.42.20	Electrification for suspension mounting	● 20 Black
455.42.30	Electrification for suspension mounting	● 30 Aluminium
455.41	Electrification for surface mounting / recessed	

8. Driver

Drivers on page 221



Custom made

Recessed / Surface / Pendant





PROJECT: FERRUZ DECORADORS



PRATS INTERNATIONAL BRANDS / PROJECT: VOLDOS ARCHITECTURE & DESIGN STATION



Its name *conceals* its body. The ABSCONDERE is the profile that you'll never see. It allows for a beautiful indirect light, soft and warm, a backing light with a design that will enable you to finish up the ceiling in a smooth, elegant, and almost invisible way. This gives the project a quality flair, rather like a luxury item. ABSCONDERE dignifies and adds up to your construction quality. Its NON-presence is its best quality; which is equivalent to say that its quality doesn't go unnoticed.

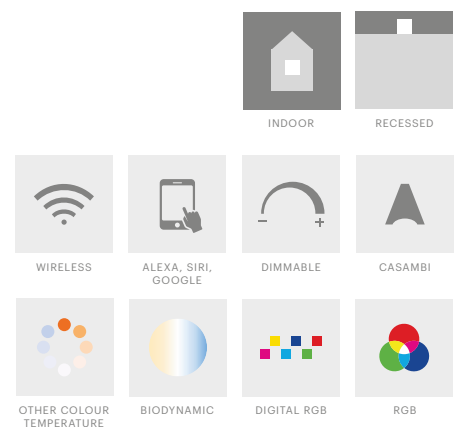



1. Profile

Reference	Description	Mounting	Finish
424.00.M	Abscondere	Recessed	○ 10 White



For 13 mm plasterboard

3. Driver

Drivers on page 221

4. Endcap

Reference	Description
424.11	End cap (2 units)




2. LED Strip



Fast connector (tools not needed)




40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40324.RGB.20.M	Nix	16	RGB	500 lm/m	24V	20


*Other options available upon request

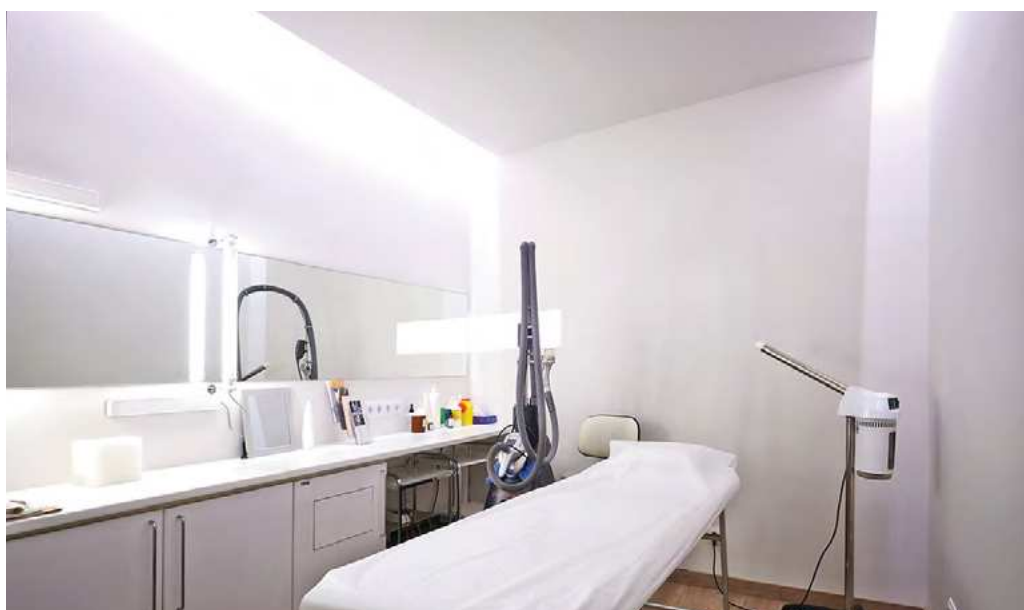

DRA. NÚRIA ESCODA / PROJECT: LÍDIA ANTÚNEZ INTERIORISME



This is a small but superbly conceived design. Its profile enables us to easily create visual effects on the wall. It makes the job of the plasterboard assembly a lot easier and, thus, it helps us to save a lot of money.



ALEXA, SIRI, GOOGLE



DIMMABLE




CASAMBI



WIRELESS



OTHER COLOUR TEMPERATURE



BIODYNAMIC



DIGITAL RGB



RGB

1. Profile

Reference	Description	Mounting	Finish
423.00.M	Aresta	Recessed	● 30 Aluminium


2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

*Other options available upon request

3. Driver

Drivers on page 221

4. Endcap


Reference	Description
423.11	Endcap (2 units)

Sella


420

GOOD NIGHT

Compact Profiles

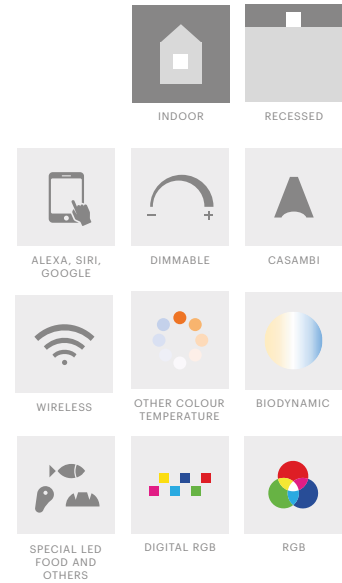

Named SELLA, the Latin name for *chair*, due to its shape, this is a small but superbly conceived design. Its profile enables us to easily create visual effects on the wall, through an extensive or intensive light which can be used at the end of a room, or to the side of our shelves, etc... It makes the job of the plasterboard assembly a lot easier and, thus, it helps us to save a lot of money. Plus, with the intensive lenses, we are able to wash a surface as high as 3 meters.





1. Profile

Reference	Description	Mounting	Finish
420.00.10	Sella	Recessed	<input type="radio"/> 10 White <input checked="" type="radio"/> 30 Aluminium

*Additional finishes available upon request

3. Driver

Drivers on page 221

4. Cover

Reference **Description**

421.01.01.M Opal cover


421.01.02.M 30° cover




Opal cover



30° cover

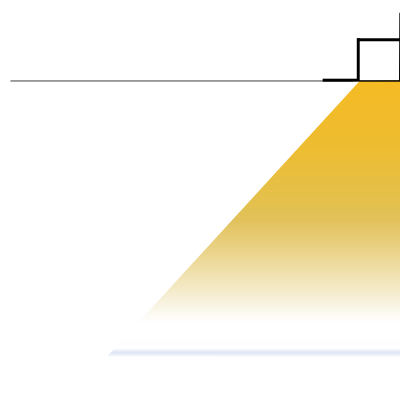

Opal cover

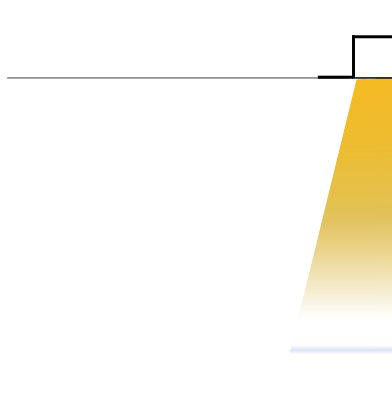

30° cover


2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector





40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

*Other options available upon request



A clean, simple and elegant profile, which is both discreet and adaptable to any project. MURUS allows for an indirect, atmospheric, grazing, cool, and warm light. Its two lenses provide very interesting solutions that give the luminaires very different purposes, depending on which one we are using: either the extensive or the intensive. Designed to be assembled on a wall, in a way that it will make it as inconspicuous as possible, MURUS is the solution in any situation when you have no other option. It can either be used as a wall lamp or as a continuous light row.

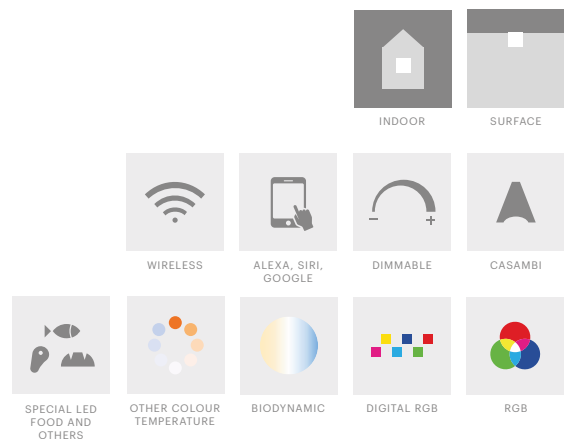



1. Profile

Reference	Description	Mounting	Finish
421.00.10	Murus	Surface	<input type="radio"/> 10 White <input checked="" type="radio"/> 30 Aluminium

*Additional finishes available upon request

3. Driver

Drivers on page 221

4. Endcap

Reference	Description	Finish
421.11.10	End cap (2 units)	<input type="radio"/> 10 White <input type="radio"/> 30 Aluminium

5. Fixations/Mounting Kits

Reference	Description
421.21	Wall clip (2 units)

6. Cover

Reference	Description
421.01.01.M	Opal cover
421.01.02.M	30° cover



Opal cover



30° cover




2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20




*Other options available upon request




SON BRULL SPA / PROJECT: FORTEZA + APARICIO / PHOTO: ART SÁNCHEZ



With the arrival of the FLEXIBILIS model, we welcome a new solution that allows us to make a circumference and cast the light either from its interior or its exterior, with aluminum profiles. With FLEXIBILIS, there will be no more need to use the loose led strip, which didn't contribute any safety or quality, and which ended up breaking down before long. No more need either to apply weird inventions that end up being more expensive than the led proper. With the FLEXIBILIS model, which bends easily to adapt to construction, these old problems are over.

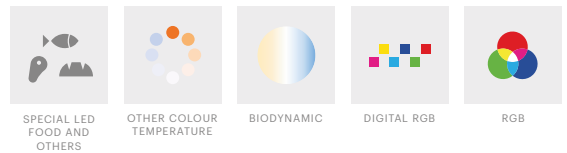

Bracket detail





SON BRULL SUITES / PROJECT: CARME PINÓS ARQ / PHOTO: ART SÁNCHEZ

1. Profile

Reference	Description	Mounting
425.00.M	Flexibilis	Surface

3. Driver

Drivers on page 221

4. Endcap

Reference	Description
425.11	End cap (2 units)

5. Fixations/Mounting Kits

Reference	Description
425.21	Fixation clip

2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14'4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14'4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14'4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14'4	4000	1000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20












*Other options available upon request



HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS



This is a much needed, essential and multifunctional profile. TOTUS allows to light up any room and adapts easily to any project, so long as we use our imagination when using it. It can either be a suspended light over a work surface, a wall lamp for a painting, a mirror light, etc... Adaptable to whatever size is needed, this is the wildcard profile that one ends up using in any project. TOTUS solves your problem before you even know it.

				
INDOOR	SURFACE			
				
WIRELESS	ALEXA, SIRI, GOOGLE	DIMMABLE	CASAMBI	
				
SPECIAL LED FOOD AND OTHERS	OTHER COLOUR TEMPERATURE	BIODYNAMIC	DIGITAL RGB	RGB





1. Profile

Reference	Description	Mounting	Finish
422.00.10.M	Totus	Surface	○ 10 White
422.00.20.M	Totus	Surface	● 20 Black
422.00.30.M	Totus	Surface	● 30 Aluminium

*Additional finishes available upon request



SON BRULL SPA / PROJECT: FORTEZA+APARICIO / PHOTO: ART SÁNCHEZ

3. Driver

Drivers on page 221

4. Endcap

Reference	Description	Finish
422.11.01.10	End cap for round cover (2 units)	○ 10 White
422.11.01.20	End cap for round cover (2 units)	● 20 Black
422.11.01.30	End cap for round cover (2 units)	● 30 Aluminium
422.11.02.10	End cap for square cover (2 units)	○ 10 White
422.11.02.20	End cap for square cover (2 units)	● 20 Black
422.11.02.30	End cap for square cover (2 units)	● 30 Aluminium

5. Mechanical Connections

Reference	Description
422.31	Linear (180°) mechanical connection
422.32	90° mechanical connection
422.33.XXX	Custom connection




2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

*Other options available upon request

6. Fixations/Mounting Kits

Reference	Description
422.22	Totus suspension kit (2 wires, 2 holders & feeding)

7. Cover


Reference	Description
422.01.01.M	Semi-circle round cover
422.01.02.M	Square cover

Angulus

427


GOOD NIGHT

Compact Profiles

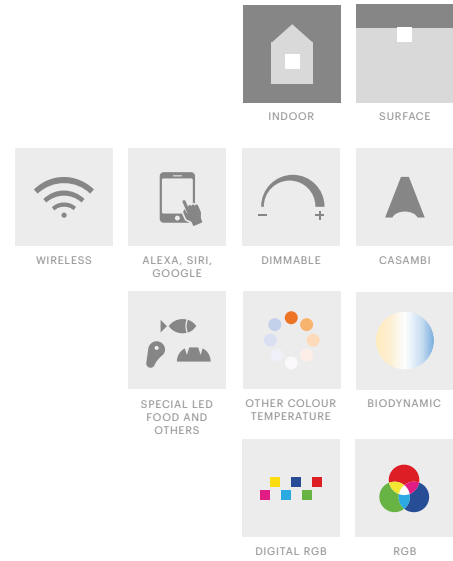

Multifunctional profile, angulus adapts easily to any corner.

1. Profile



Reference	Description	Mounting	Finish
427.00.M	Angulus	Surface	● 30 Aluminium



CASA RIERA ORDEIX / PROJECT: SANDRA SOLER STUDIO / PHOTO: IVÁN RAGA


2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

*Other options available upon request

3. Driver


Drivers on page 221

4. Endcap



Reference	Description
427.11	Endcap (2 units)



The REFUNDUS is a 4-model family that has similar uses but serves different needs. Its frames are designed to be recessed in plasterboard walls (and ceilings) where there is only one thing in sight: the light. Without glaring the user, they allow to light up such rooms as bedrooms, corridors, dining rooms, living rooms, offices, etc., in a way that they absolutely integrate to architecture. They remain invisible and give off an elegant atmosphere, and the designer can spare himself from using the visible lamps when the architecture doesn't require them. It comes in 4 different versions -(P) flat on the wall, (I) in an interior corner, (E) in an exterior corner, and the BIG REFUNDUS, which is the same as the (P) but bigger, to achieve a bigger impact whenever necessary.

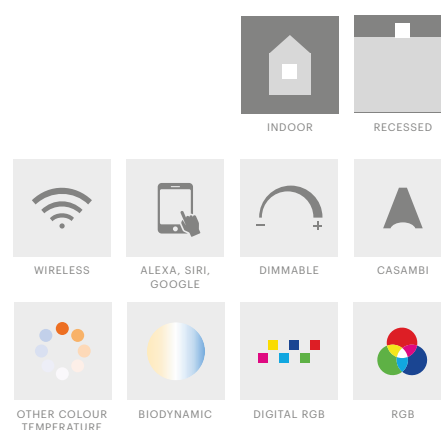




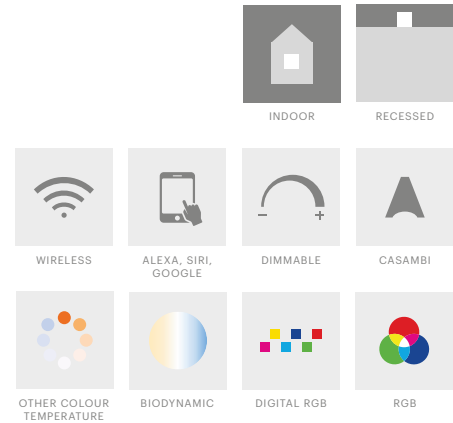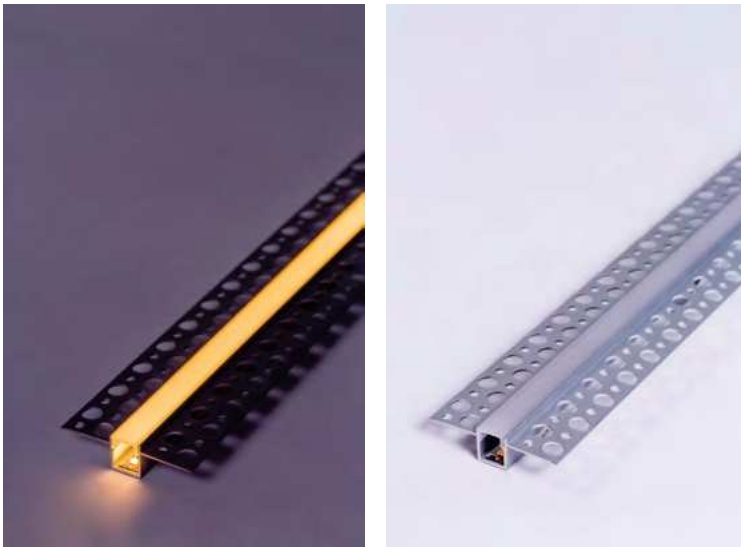

1. Profile

Reference	Description	Mounting
406.00.M	Refundus-p	Recessed



3. Driver

Drivers on page 221

4. Endcap

Reference	Description
406.11	End cap (2 units)



2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector




40214
Strip to strip connector

Can be cut every 10cm

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14'4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14'4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14'4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14'4	4000	1000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

*Other options available upon request

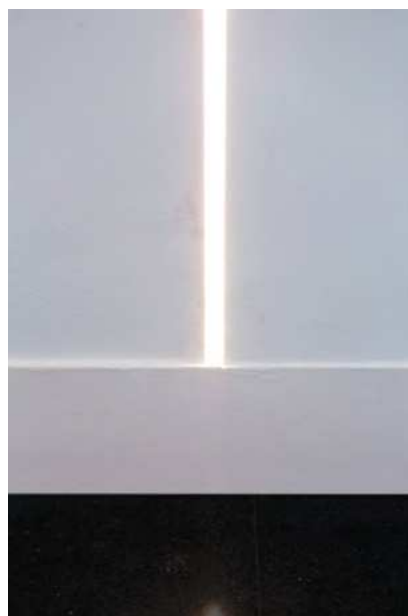

Refundus-i

407

GOOD NIGHT

Compact Profiles



INDOOR RECESSED



WIRELESS



ALEXA, SIRI, GOOGLE




DIMMABLE



CASAMBI



OTHER COLOUR TEMPERATURE



BIODYNAMIC




DIGITAL RGB



RGB

1. Profile

Reference	Description	Mounting
407.00.M	Refundus-i	Recessed



3. Driver

Drivers on page 221

4. Endcap

Reference	Description
407.11	End cap (2 units)




2. LED Strip



Fast connector (tools not needed)




40213
Strip to wire connector





40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14'4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14'4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14'4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14'4	4000	1000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20


*Other options available upon request

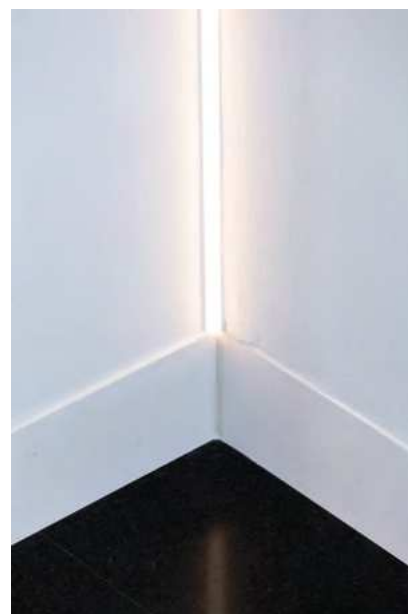

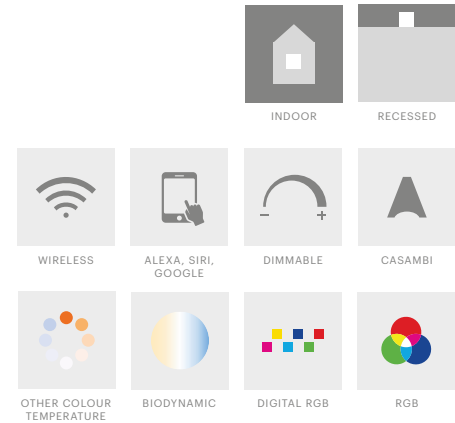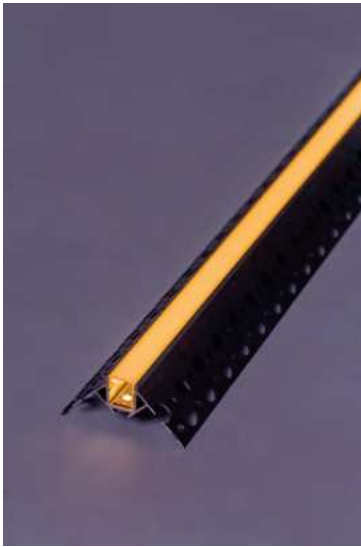

1. Profile

Reference	Description	Mounting
408.00.M	Refundus-e	Recessed



3. Driver

Drivers on page 221

4. Endcap

Reference	Description
408.11	End cap (2 units)




2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14'4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14'4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14'4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14'4	4000	1000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

*Other options available upon request





Big Refundus

409


GOOD NIGHT

Compact Profiles

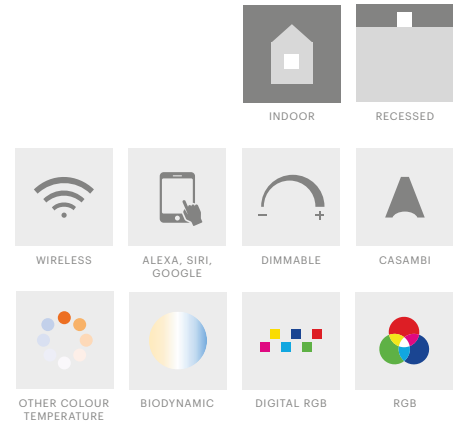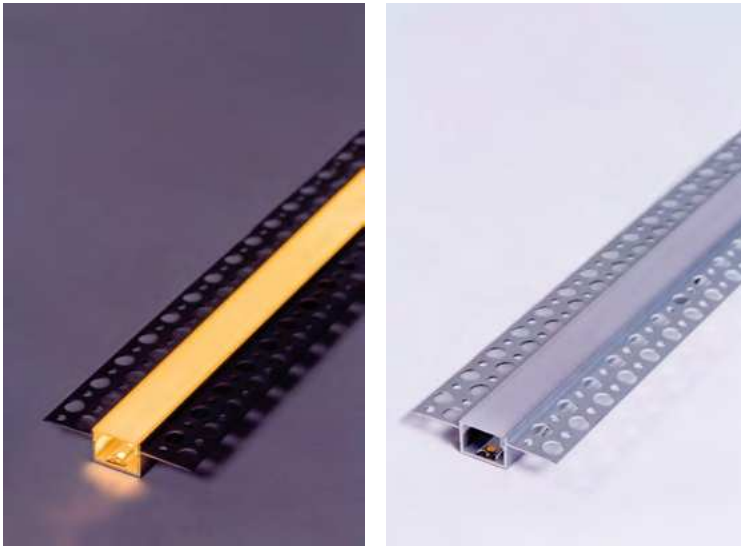

1. Profile

Reference	Description	Mounting
409.00.M	Big Refundus	Recessed



3. Driver

Drivers on page 221

4. Endcap

Reference	Description
409.11	End cap (2 units)




2. LED Strip



Fast connector (tools not needed)




40213
Strip to wire connector




40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20
40213.24.67.M	Fasciola	13	2400	1000 lm/m	24V	67
40213.27.67.M	Fasciola	13	2700	1000 lm/m	24V	67
40213.30.67.M	Fasciola	13	3000	1000 lm/m	24V	67
40213.40.67.M	Fasciola	13	4000	1000 lm/m	24V	67
40221.24.67.M	Fasciola	21	2400	2000 lm/m	24V	67
40221.27.67.M	Fasciola	21	2700	2000 lm/m	24V	67
40221.30.67.M	Fasciola	21	3000	2000 lm/m	24V	67
40221.40.67.M	Fasciola	21	4000	2000 lm/m	24V	67
40214.RGB.67.M	Fasciola	14	RGB	480 lm/m	24V	67


*Other options available upon request

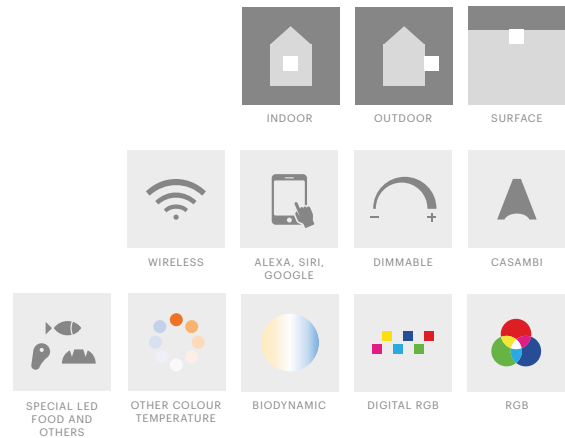

Opticus is the product of the miniaturization of the LED profile combined with the capacity to control light through a single lens. The position of the LED using brackets in different locations makes it possible to set up the light according to the needs of the project: Narrow, Medium, Wide.



Bracket detail





HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS / PHOTO: OLGA PLANAS

1. Profile

Reference	Description	Mounting
400.00.M	Opticus	Surface

3. Driver

Drivers on page 221

4. Endcap

Reference	Description
400.11	End cap (2 units)



6. Fixations / Mounting Kits


Reference	Description
400.21	Fixation clip (1 unit / 1'5m)




*IP 67 connectors upon request




Beam Angles



3 Wide



2 Medium



1 Narrow

The Opticus System offers an Internal support rail that can be placed in 2 different positions or left out. Combined with the lens, this focuses the light, offering 3 different beam angles to create various light effects.


2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20



*Other options available upon request

Minimus-2 Surface


412

GOOD NIGHT


Compact Profiles

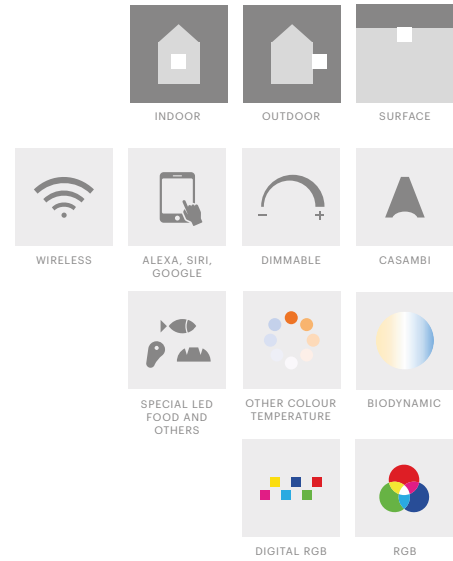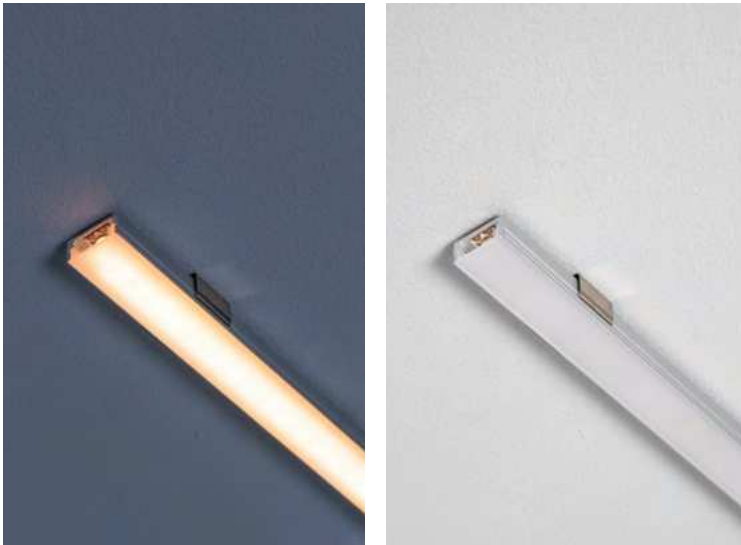

The MINIMUS-2 represents the natural technical evolution of the Minimus, while keeping the same expectations. Minimus represents simplicity and practicality brought to your everyday life. With little effort we have achieved a simple, small and practical design that offers several solutions for everyday projects: alcoves, kitchens, ledges, shelves, etc...



Bracket detail



MC ESTILISTAS / PROJECT: SANDRA SOLER STUDIO



CAN PERICUS / PROJECT: QUIM ROQUE / PHOTO: JAUME LIS




1. Profile

Reference	Description	Mounting
412.00.M	Minimus-2	Surface

3. Driver

Drivers on page 221


4. Endcap

Reference	Description	
412.11	End cap (2 units)	

5. Mechanical Connections

Reference	Description
412.31	180° connector
412.32	90° connector

6. Fixations / Mounting Kits

Reference	Description	
412.21	Fixation clip	
412.29	Adjustable clip	


2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP	CRI
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20	-
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20	-
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20	-
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20	-
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20	-
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20	-
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20	-
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20	-
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20	-
40213.24.67.M	Fasciola	13	2400	1000 lm/m	24V	67	-
40213.27.67.M	Fasciola	13	2700	1000 lm/m	24V	67	-
40213.30.67.M	Fasciola	13	3000	1000 lm/m	24V	67	-
40213.40.67.M	Fasciola	13	4000	1000 lm/m	24V	67	-
40221.24.67.M	Fasciola	21	2400	2000 lm/m	24V	67	-
40221.27.67.M	Fasciola	21	2700	2000 lm/m	24V	67	-
40221.30.67.M	Fasciola	21	3000	2000 lm/m	24V	67	-
40221.40.67.M	Fasciola	21	4000	2000 lm/m	24V	67	-
40214.RGB.67.M	Fasciola	14	RGB	480 lm/m	24V	67	-












*Other options available upon request


*IP 67 connectors available upon request





We are expanding the MINIMUS-2 series with the R model, the recessed model in walls, ceilings, wooden, and metallic finishes... The minimum expression, now recessed and with a frame that allows for an easy installation. Small in size, the different light options in its interior make the MINIMUS series, and specifically the MINUMIS-2R, an essential series and model to practically any project.

	 INDOOR	 RECESSED		
 WIRELESS	 ALEXA, SIRI, GOOGLE	 DIMMABLE	 CASAMBI	
 SPECIAL LED FOOD AND OTHERS	 OTHER COLOUR TEMPERATURE	 BIODYNAMIC	 DIGITAL RGB	 RGB





PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCÉ GOST PHOTO

1. Profile

Reference	Description	Mounting	Finish
411.00.M	Minimus recessed	Recessed	● 30 Aluminium



Step 1



Step 2



Step 3



Step 4


2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14'4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14'4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14'4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14'4	4000	1000 lm/m	24V	20
40317.RGB.20.M	Nix	17	RGB	500 lm/m	24V	20

*Other option available upon request

3. Driver

Drivers on page 221

4. Endcap

Reference	Description
411.11	End cap (2 units)



















SON BRULL / PROJECT: FORTEZA + APARICIO / PHOTO: ART SÁNCHEZ



The series is growing. New demands for our MINIMUS range forced us to increase the size of the profile for those rooms where more wattage is required. This new dimension also makes it possible to integrate water proof connectors (IP) within the profile itself. Also in those designs in which requirements demanded greater flexibility and which needed more solutions. The BIG helps us complete any space, no matter how complex, and nowadays, the whole MINIMUS series ended up being essential to solve many designs and adapt to all kind of budgets.

				
INDOOR	OUTDOOR	RECESSED		
				
WIRELESS	ALEXA, SIRI, GOOGLE	DIMMABLE	CASAMBI	
				
SPECIAL LED FOOD AND OTHERS	OTHER COLOUR TEMPERATURE	BIODYNAMIC	DIGITAL RGB	RGB

Bracket detail



1. Profile

Reference	Description	Mounting	Finish
418.00.M	Big Minimus	Surface	● 30 Aluminium

3. Driver

Drivers on page 221

4. Endcap

Reference	Description
418.11	End cap (2 units)



5. Fixations / Mounting Kits

Reference	Description
418.21	Fixation clip

*IP 67 connectors available upon request




2. LED Strip



Fast connector (tools not needed)



40213
Strip to wire connector



40214
Strip to strip connector

Number	LED Strip	W	K	Lumen Output	Volts	IP
40314.24.20.M	Nix	14,4	2400	1000 lm/m	24V	20
40314.27.20.M	Nix	14,4	2700	1000 lm/m	24V	20
40214.30.20.M	Nix	14,4	3000	1000 lm/m	24V	20
40314.40.20.M	Nix	14,4	4000	1000 lm/m	24V	20
40324.24.20.M	Nix	24	2400	2000 lm/m	24V	20
40324.27.20.M	Nix	24	2700	2000 lm/m	24V	20
40324.30.20.M	Nix	24	3000	2000 lm/m	24V	20
40324.40.20.M	Nix	24	4000	2000 lm/m	24V	20
403217RGB.20.M	Nix	17	RGB	500 lm/m	24V	20
40213.24.67.M	Fasciola	13	2400	1000 lm/m	24V	67
40213.27.67.M	Fasciola	13	2700	1000 lm/m	24V	67
40213.30.67.M	Fasciola	13	3000	1000 lm/m	24V	67
40213.40.67.M	Fasciola	13	4000	1000 lm/m	24V	67
40221.24.67.M	Fasciola	21	2400	2000 lm/m	24V	67
40221.27.67.M	Fasciola	21	2700	2000 lm/m	24V	67
40221.30.67.M	Fasciola	21	3000	2000 lm/m	24V	67
40221.40.67.M	Fasciola	21	4000	2000 lm/m	24V	67
40214.RGB.67.M	Fasciola	14	RGB	480 lm/m	24V	67



PROJECT: OCTAVI MESTRE ARO / PHOTO: JORDI MIRALLES