


Suffixus HE

10013

GOOD NIGHT


Recessed

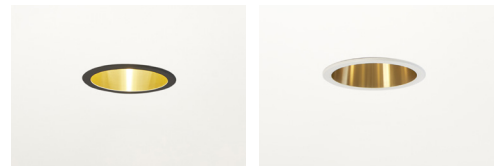


Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90	
Life Time	L80/B10 >55.000 h	
Cut-out Size	Ø62 mm	
Adjustable	No	

Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø68 h91mm
Cut-out size	Ø62 h101mm

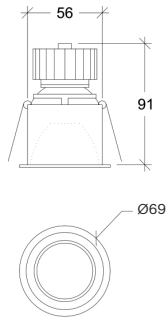

Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø69 h118mm
Cut-out size	Ø62 h126mm

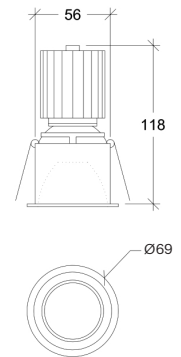

10013.*.**.*.**.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	5	27 2700	1 Narrow 15°	⊙ 11 White & White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	⊙ 14 White & Gold	
		40 4000	3 Wide 39°	⊙ 22 Black & Black	
			4 Superwide 61°	⊙ 24 Black & Gold	