
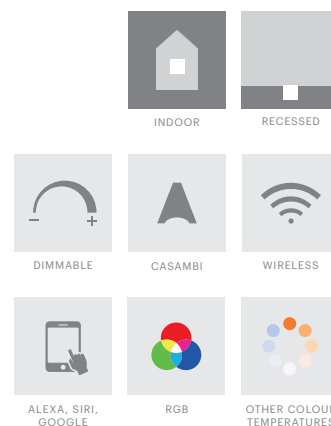


Caminus-r


70008

GOOD NIGHT

Recessed

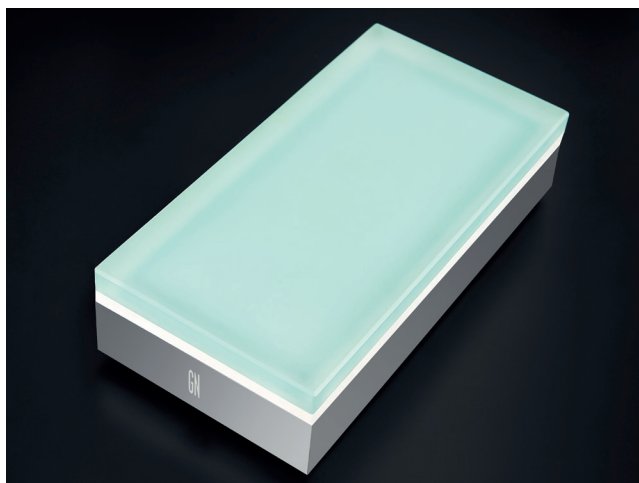

| | |
|---|---|
| Power Rating | 2,6 W |
| Life Span | 50.000 h |
| LED Colour | White, RGB |
| Beam Angel | 100° |
| Input Voltage | 24 VDC |
| Material (Housing) | Stainless Steel |
| Glass Material | Tempered Glass |
| Working Temperature | -25°C +50°C |
| Dimension (without installation box) | 100 x 200 x 70 mm |
| Cable Interconnect | Power cable: 2 x 1.0 mm ² Signal cable: 4 x 0,3 mm ² rubber cable |
| Control | ON/OFF, DMX512 |
| IP | IP67 |
| Luminous Flux | 72,8lm |

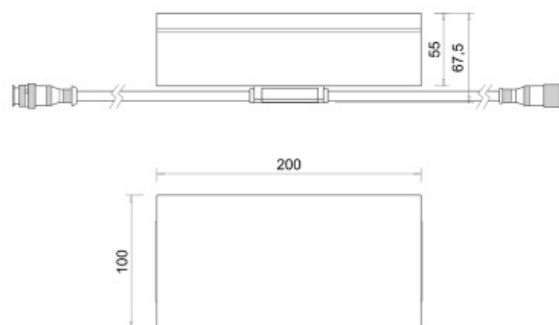

70008.3.27.6.80

Caminus-r 100x200 24V 2'6W 2700K Opal

70008.3.30.6.80

Caminus-r 100x200 24V 2'6W 3000K Opal

70008.3.RGB.6.80

Caminus-r 100x200 24V 2'6W RGB Opal

Accessories

- 70007.A.1** Caminus Leader cable 4m for monocolor
- 70007.A.2** Caminus Jumper cable 1m for monocolor
- 70007.A.3** Caminus endcap for monocolor

RGB Accessories upon request

Driver not included - See drivers section
Control system and special drivers upon request

Custom projects upon request