







A luminaire designed for flexibility, Momentum offers both suspended and surface-mounted configurations, catering to diverse lighting needs. Choose between opal diffuse lighting for a soft ambient glow or UGR<19 optics for precise glare reduction. With its sleek profile and modern design, Momentum seamlessly integrates into any interior, enhancing the aesthetic appeal of the space. Ideal for commercial, hospitality, or residential settings, it sets the standard for versatile lighting solutions.

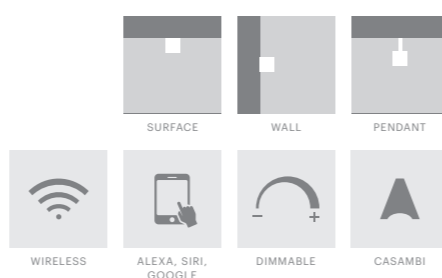

Up/Down Light

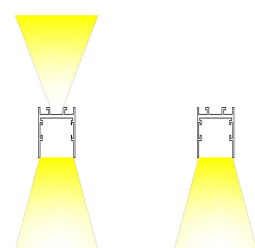

Surface / Suspended / Wall

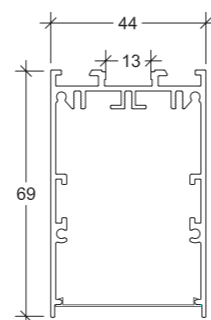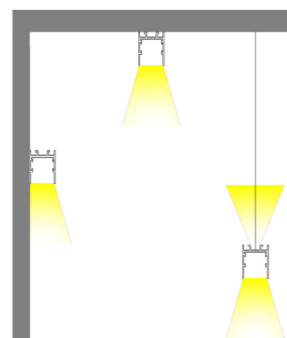

1. Profile

Reference	Description	Mounting	Finish
457.00.10.M	Momentum Profile	Suspended	○ 10 White
457.00.20.M	Momentum Profile	Suspended	● 20 Black
470.00.30.M	Momentum Profile	Suspended	● 30 Aluminium

2. Endcap

Reference	Description	Finish
457.11.10	Endcap White (2 units)	○ 10 White
457.11.20	Endcap Black (2 units)	● 20 Black
457.11.30	Endcap Aluminium (2 units)	● 30 Aluminium

3. Power feed & Electrification

Reference	Description	Finish	Dimming
457.42.10	Momentum power feed kit and electrification for suspension	○ 10 White	NDI ON/OFF
457.42.10	Momentum power feed kit and electrification for suspension	● 20 Black	DAL DALI
457.42.30	Momentum power feed kit and electrification for suspension	● 30 Aluminium	PDI PUSH-DIMM
457.41	Momentum power feed kit and electrification for surface mounting		

4. Fixations & Connections

Reference	Description
457.21	Momentum surface clip for ceiling
457.22	Momentum suspension kit (1 unit/1,5m)
457.24	Momentum surface clip por wall
457.31	Momentum linear connection (if length>2,5m)
457.32	Momentum connection 90°

5. Track 3-Phase

Reference	Position	Description	Finish	Dimming
457	D Down	TRA Track	○ 10 White	NDI ON/Off
			● 20 Black	DAL DALI
			● 30 Aluminium	




PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA

6. LED & Driver

Reference	Wattage	Description	CCT	Light Distribution	Grid Colour	Dimming
457	M14 14W/m	LED 200mA 2600 lm/m	27 2700K	2 Medium 60°	W White Grid	NDI ON/Off
	M24 24W/m	LED 350mA 4600 lm/m	30 3000K	3 Wide 90°	B Black grid	DAL Dali
			40 4000K			PDI Push Dimm




Wide 90°



UGR ≤ 19 for 2600lm/m

Medium 60°



UGR ≤ 19





Grid Colour




Reference	Wattage	Description	CCT	Light Distribution	Dimming
457	M14 14W/m	LED 350mA 2600 lm/m	27 2700K	6 Opal 120°	NDI ON/Off
	M21 21W/m	LED 500mA 3500 lm/m	30 3000K		DAL Dali
			40 4000K		PDI Push Dimm




Opal Down 120°

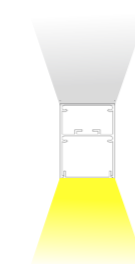

Reference	Lumen	Description	CCT	Dimming
457.05	1000	14W/m LED 24V 1000 lm/m	27 2700K	NDI ON/Off
	2000	24W/m LED 24V 2000 lm/m	30 3000K	DAL Dali
	3000	21W/m HE LED 24V 3500 lm/m	40 4000K	PDI Push Dimm



Ledstrip UP Opal 120°



PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCÉ GOST PHOTO

