


Audere Cylinder Surface


30079

GOOD NIGHT

Surface




Installation	Indoor	CRI	>90
Mounting Position	Surface	Life Time	L80/B10 >55.000 h
IP	20	Cut-out Size	-
Wattage	20W	Dimensions	Ø80 h142mm
Lumen output	2600	Adjustable	No
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable *Dimmable drivers upon request		

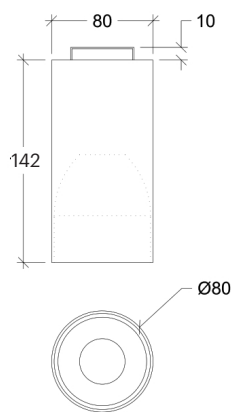

30079.20.**.*.NDI*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30079	20	27 2700	1 Narrow 14°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°	20 Black	
		40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
				A0 Corten	
				B0 Copper	

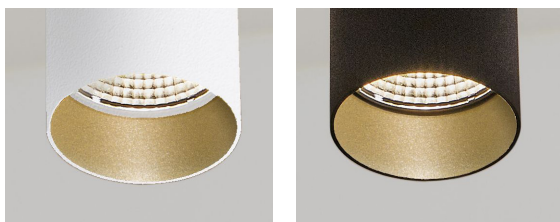

Other finishes are available upon request for the external body and the internal ring