

GOOD NIGHT

LUMIK Surface

QUALIA – GU10

LKT1 01

GOOD NIGHT

Surface




DIMMABLE

CASAMBI

WIRELESS

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	80x80 h105mm
Adjustable	Yes

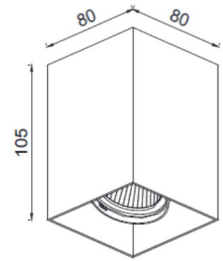

LKT101.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT101	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




QUALIA-2 – 2GU10


LKT1 02

GOOD NIGHT

Surface



Installation	Indoor	CRI	GU10
Mounting Position	Surface	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	2 x GU10	Dimensions	157x80 h105mm
Lumen output	2 x GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

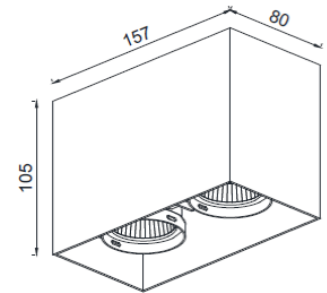

LKT102.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT102	2 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




QUALIA 111 – GU10

LKT1 03


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	QR111 GU10
Lumen output	QR111 GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 GU10
Life Time	QR111 GU10
Cut-out Size	-
Dimensions	150x150 h150mm
Adjustable	Yes

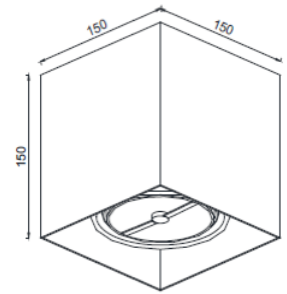

LKT103.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT103	QR111 GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




QUALIA 111-2 – 2GU10

LKT1 04


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2 x QR111 GU10
Lumen output	2 x QR111 GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 GU10
Life Time	QR111 GU10
Cut-out Size	-
Dimensions	300x150 h150mm
Adjustable	Yes

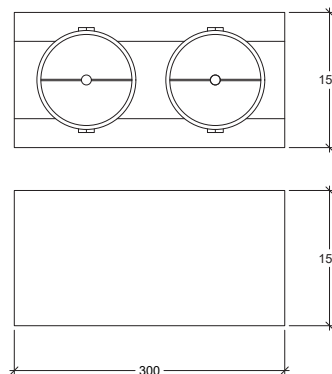

LKT104.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT104	2 x QR111 GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TUBER 250 – GU10

LKT2 01


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h250mm
Adjustable	No

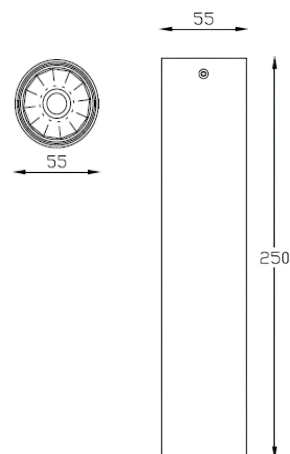

LKT201.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT201	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TUBER 250


LKT2 01

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	5W 8W	Dimensions	Ø55 h250mm
Lumen output	700 1200	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

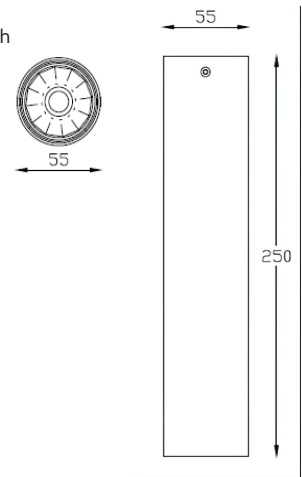

LKT201.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT201	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	8	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	




TUBER 500 – GU10

LKT2 02


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h500mm
Adjustable	No

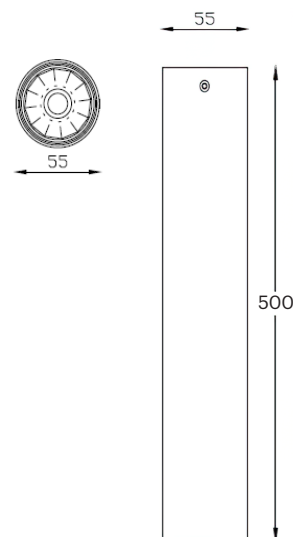

LKT202.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT202	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart






TUBER 500

LKT2 02


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	5W 8W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55 h500mm
Adjustable	No

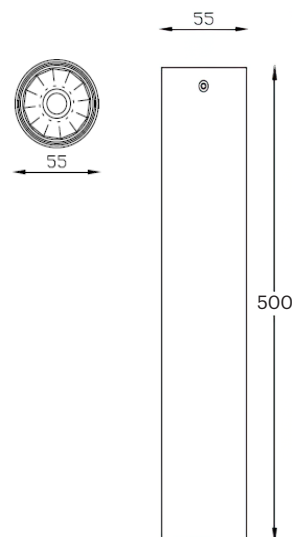

LKT202.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT202	5	27 2700	1 Narrow 15°	10 White
	8	30 3000	2 Medium 25°	20 Black
		40 4000	3 Wide 40°	40 Gold
			4 Superwide 60°	CO Silver
				MO Metallic Copper
				NO Metallic Gold
				PO Metallic Chrome
				RA RAL Chart
				BO Copper






TUBER 750 – GU10

LKT2 03


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h750mm
Adjustable	No

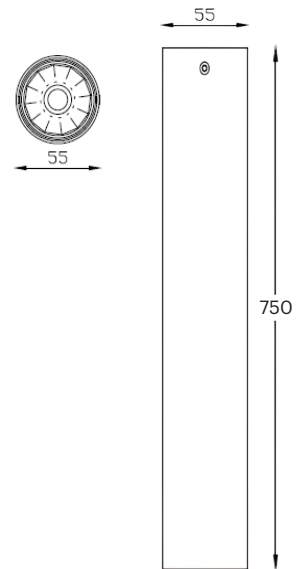

LKT203.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT203	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TUBER 750

LKT2 03


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	9W 12W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55 h750mm
Adjustable	No

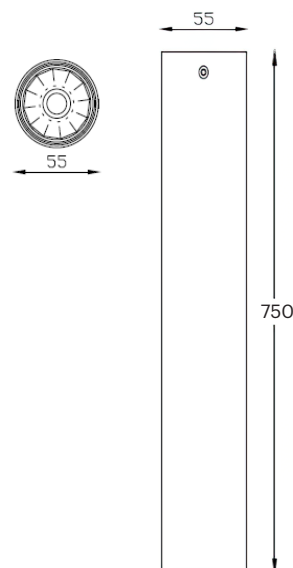

LKT203.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT203	9	27 2700	1 Narrow 12°	10 White	MO Metallic Copper
	12	30 3000	2 Medium 24°	20 Black	NO Metallic Gold
		40 4000	3 Wide 36°	40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	




TRUNCUS 250 – GU10

LKT2 04


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø95 h250mm
Adjustable	No

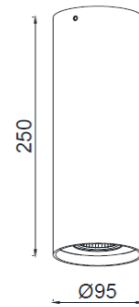

LKT204.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT204	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TRUNCUS 250


LKT2 04

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø95 h250mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

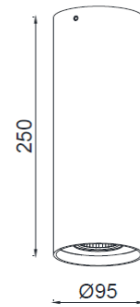

LKT204.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT204	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● CO Silver
				● BO Copper
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				RA RAL Chart




TRUNCUS 500 – GU10


LKT2 05

GOOD NIGHT

Surface

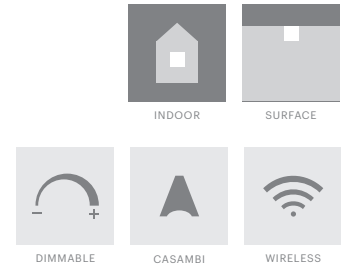

Installation	Indoor	CRI	GU10
Mounting Position	Surface	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø95 h500mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

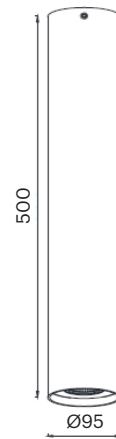

LKT205.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT205	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart



TRUNCUS 500


LKT2 05

GOOD NIGHT


Surface



Edge cut in angle on request



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø95 h500mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

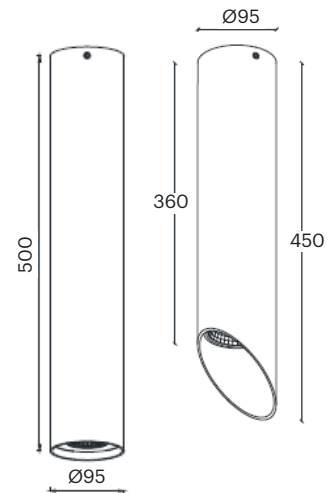

LKT205.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT205	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● B0 Copper
				RA RAL Chart




TRUNCUS 750 – GU10


LKT2 06

GOOD NIGHT

Surface



Installation	Indoor	CRI	GU10
Mounting Position	Surface	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø95 h750mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKT206.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT206	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TRUNCUS 750

LKT2 06

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø95 h750mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		



LKT206.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT206	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




BIG TRUNCUS 300 – GU10 – 111


LKT2 07

GOOD NIGHT

Surface



Installation	Indoor	CRI	Gu10 – 111
Mounting Position	Surface	Life Time	GU10 – 111
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø120 h300mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKT207.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT207	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




BIG TRUNCUS 300


LKT2 07

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120 h300mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		



LKT207.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT207	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




BIG TRUNCUS 500 – GU10 – 111


GOOD NIGHT

LKT2 08

Surface



Installation	Indoor	CRI	GU10 – 111
Mounting Position	Surface	Life Time	GU10 – 111
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø120 h500mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

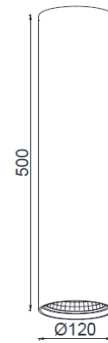

LKT208.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT208	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




BIG TRUNCUS 500


LKT2 08

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120 h500mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

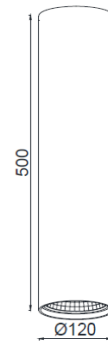

LKT208.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT208	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




BIG TRUNCUS 750 – GU10 – 111


LKT2 09

GOOD NIGHT

Surface



Installation	Indoor	CRI	GU10 – 111
Mounting Position	Surface	Life Time	GU10 – 111
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø120 h750mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

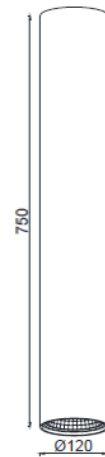

LKT209.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT209	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




BIG TRUNCUS 750


LKT2 09

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120 h750mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

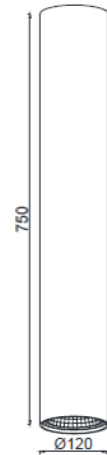

LKT209.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT209	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




TRIGINTA 600

LKT3 19 586mm


GOOD NIGHT

Surface




Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	8W 12W 18W
Lumen output	1400 2000 2700
Connection	350mA 500mA 700mA
Driver	Remote
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	586x35 h35mm
Adjustable	No

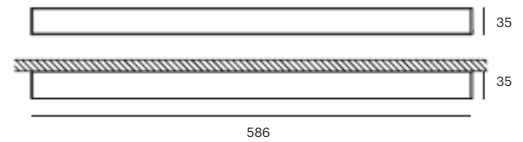

LKT319.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT319	8	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	18	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

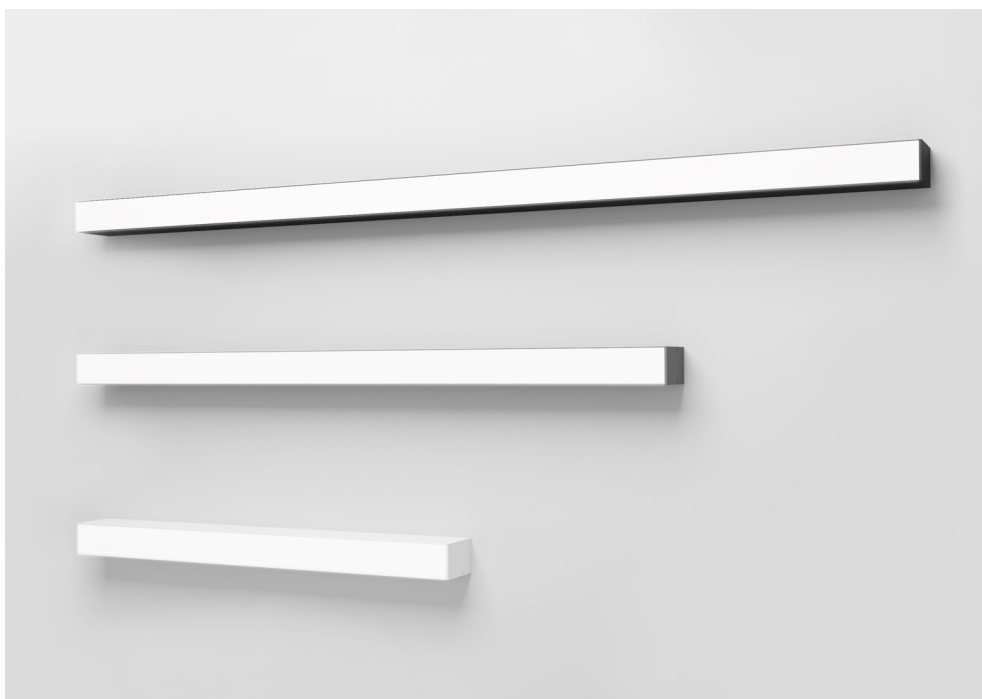

TRIGINTA 900

LKT3 20 866mm


GOOD NIGHT

Surface




Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 18W 26W
Lumen output	2100 3000 4100
Connection	350mA 500mA 700mA
Driver	Remote
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x35 h35mm
Adjustable	No

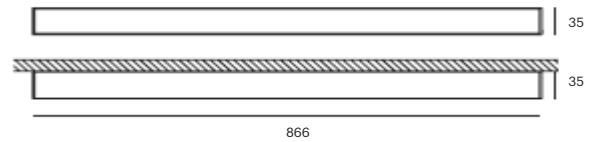

LKT320.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT320	12	27 2700		10 White MO Metallic Copper
	18	30 3000		20 Black NO Metallic Gold
	26	40 4000		40 Gold PO Metallic Chrome CO Silver RA RAL Chart BO Copper

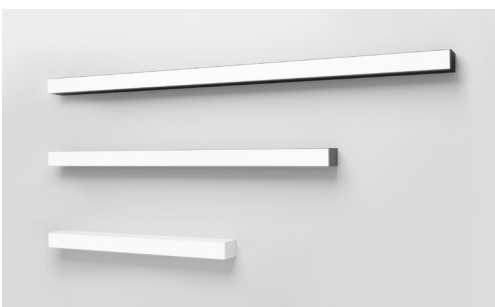




TRIGINTA 1200

LKT3 21 1146mm


GOOD NIGHT

Surface




Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	16W 24W 34W
Lumen output	2800 4000 5400
Connection	350mA 500mA 700mA
Driver	Remote
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1146x35 h35mm
Adjustable	No

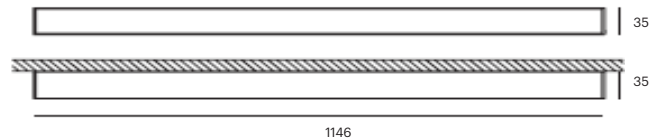

LKT321.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT321	16	27 2700	6 Opal 120°	10 White MO Metallic Copper
	24	30 3000		20 Black NO Metallic Gold
	34	40 4000		40 Gold PO Metallic Chrome CO Silver RA RAL Chart BO Copper

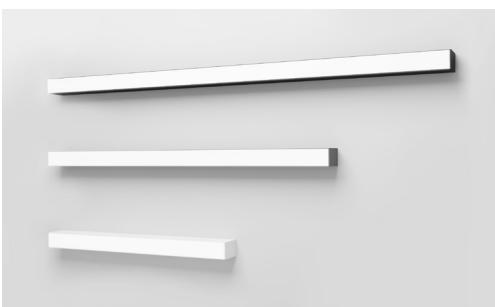





VETUS 600


LKT4 10 586mm

GOOD NIGHT

Surface

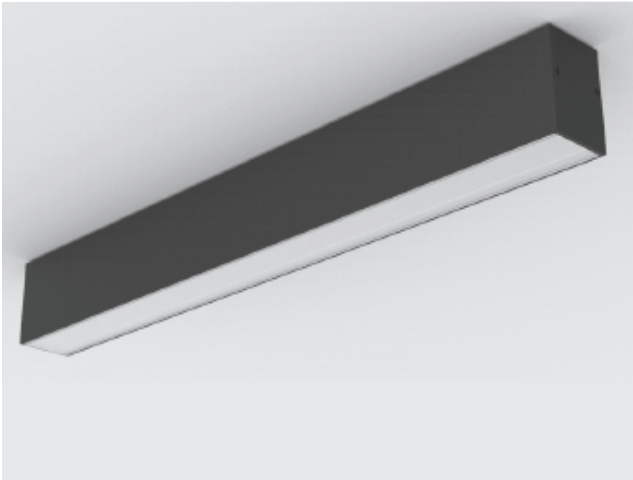

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	8W 12W 18W	Dimensions	586x43,5 h65,5mm
Lumen output	1400 2000 2700	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

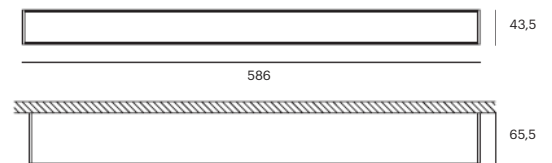

LKT410.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT410	8	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	18	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	





VETUS 900

LKT4 11 866mm


GOOD NIGHT

Surface

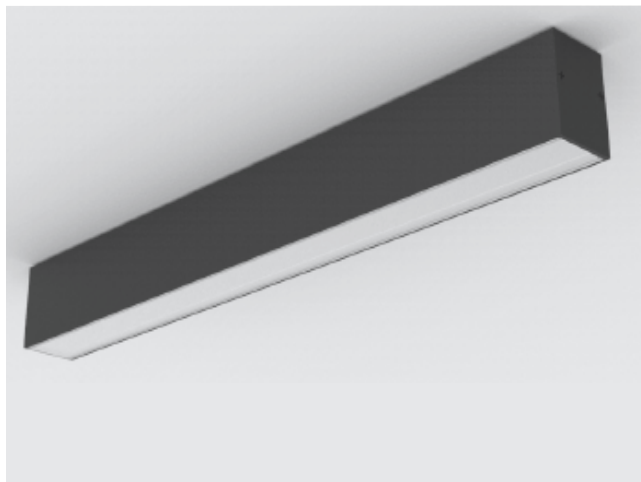

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 18W 26W
Lumen output	2100 3000 4000
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x43,5 h65,5mm
Adjustable	No

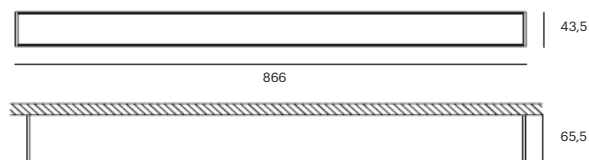

LKT411.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT411	12	27 2700	6 Opal 120°	10 White MO Metallic Copper 20 Black NO Metallic Gold 40 Gold PO Metallic Chrome CO Silver RA RAL Chart B0 Copper
	18	30 3000		
	26	40 4000		







VETUS 1200


LKT4 12 1146mm

GOOD NIGHT

Surface

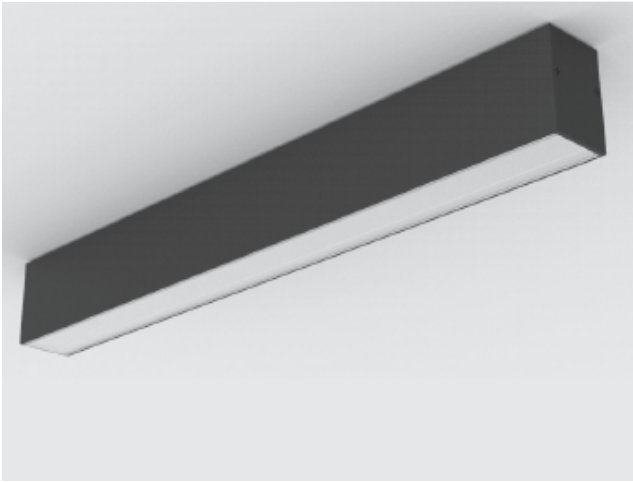

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	16W 24W 35W	Dimensions	1146x43,5 h65,5mm
Lumen output	2800 4000 5400	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

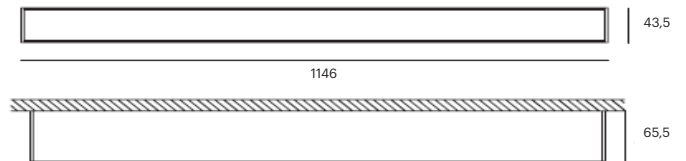

LKT412.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT412	16	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	24	30 3000		20 Black	NO Metallic Gold
	35	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				B0 Copper	




GUTTA TECTUM

LKT5 01


GOOD NIGHT

Surface

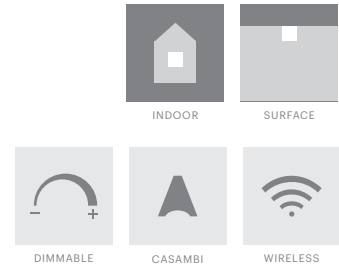

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø120x100h h156mm
Adjustable	Yes

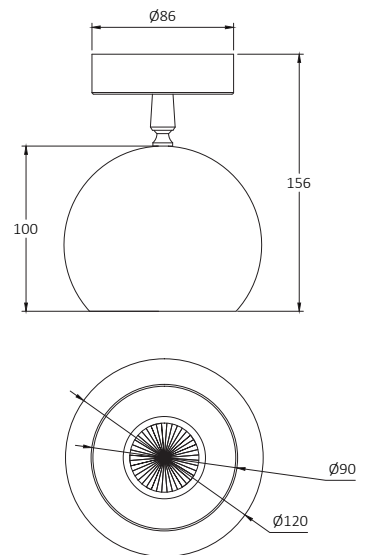

LKT501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

