

GOOD NIGHT


LUMIK Recessed

CUBIC QT1 5454


LKE3 01

GOOD NIGHT

Recessed



Installation	Indoor	CRI	> 90
Mounting Position	Ceiling recessed	Life Time	L90 / B20 50.000 h
IP	20	Cut-out Size	45x45 h70mm
Wattage	6W	Dimensions	54x54 h70mm
Lumen output	635	Adjustable	No
Connection	350mA		
Driver	Included (remote)		
Dimmable	on/off (dimnable on request)		

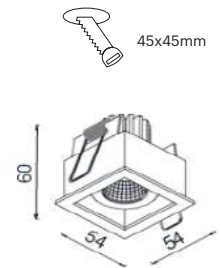

LKE301.*.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE301	6	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
		30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	



CUBIC QT2 5496

LKE3 02


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x 6W
Lumen output	2 x 635
Connection	350mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L90 / B20 50.000 h
Cut-out Size	94,4x45 h78mm
Dimensions	96x54 h78mm
Adjustable	No



LKE302.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE302	12	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
		30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	




CUBIC Q1 – GU10 7676

LKE2 01

GOOD NIGHT

Recessed

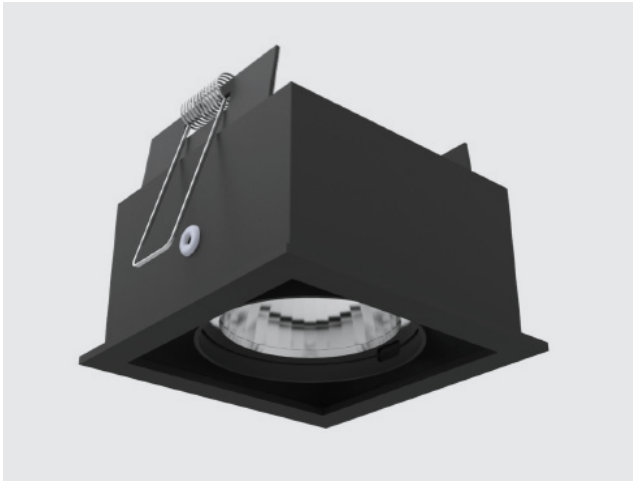

INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	70x70mm h85mm
Dimensions	76x76 h75mm
Adjustable	No



LKE201.GU10.XX.X.**



Number	W	Colour Temperature	Light Distribution	Finish										
LKE201	GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														

CUBIC Q2 – 2GU10 76141


LKE2 02

GOOD NIGHT

Recessed

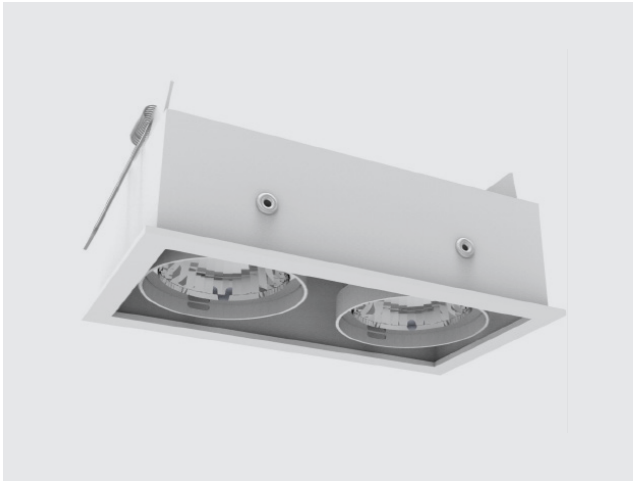

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	133x70 h85mm
Wattage	2 x GU10	Dimensions	76x141 h75mm
Lumen output	2 x GU10	Adjustable	No
Connection	239V		
Driver	Not required		
Dimmable	Depending on lamp		

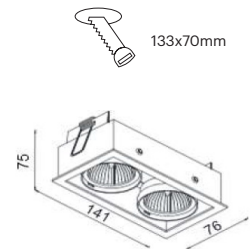

LKE202.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish
LKE202	2 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC QT1 7676

LKE2 01

GOOD NIGHT

Recessed

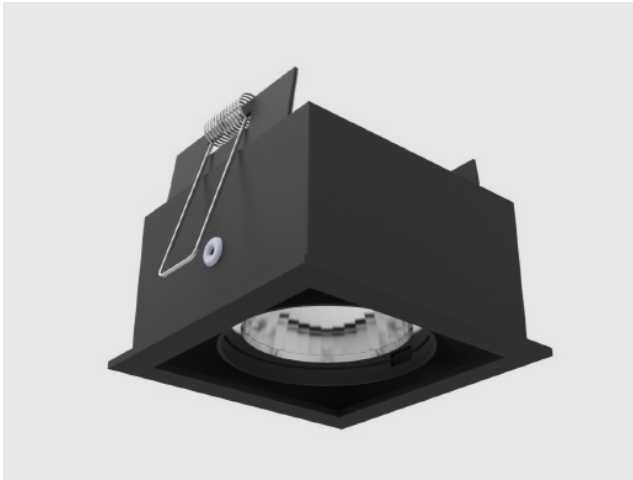

INDOOR

RECESSED



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L90 / B20 50.000 h
Cut-out Size	70x70 h90mm 70x70 h110mm
Dimensions	76x76 h80mm 76x76 h115mm
Adjustable	No



LKE201.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKE201	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	9	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	

CUBIC QT2 76141

LKE2 02


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x 5W 2 x 9W
Lumen output	2 x 700 2 x 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L90 / B20 50.000 h
Cut-out Size	133x70 h110mm
Dimensions	76x141 h75mm
Adjustable	No

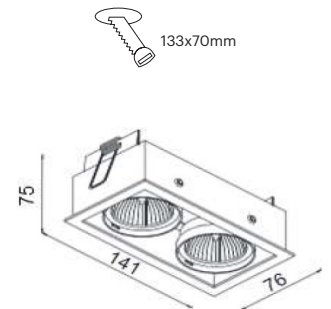

LKE202.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE202	10	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	18	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	




CUBIC Q1 – GU10 Trimless 7589

LKE1 05

GOOD NIGHT

Recessed

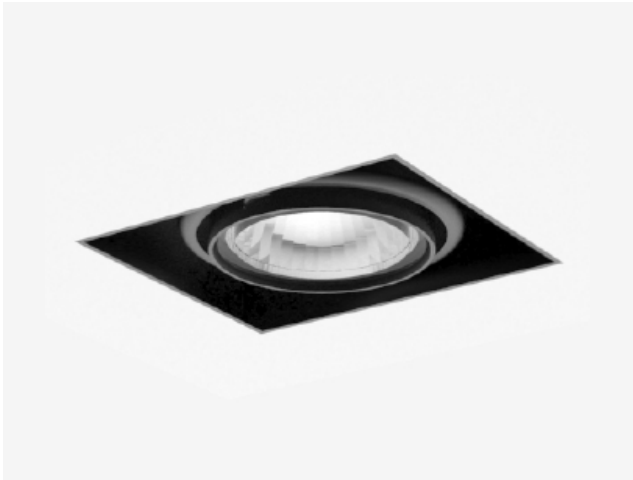

INDOOR

RECESSED



DIMMABLE



CASAMBI





WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	89x76 h105mm
Dimensions	89x76 h97mm
Adjustable	Yes



89x76mm



LKE105.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKE105	GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														



CUBIC Q2 – 2GU10 Trimless 75165

LKE1 06

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x GU10
Lumen output	2 x GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	166x76 h84mm
Dimensions	166x75 h97mm
Adjustable	Yes

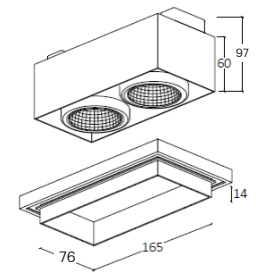

LKE106.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKE106	2 x GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														



CUBIC Q3 – 3GU10 Trimless 75246

LKE1 07

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	246x76 h107mm
Wattage	3 x GU10	Dimensions	246x76 h97mm
Lumen output	3 x GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		




246x76mm

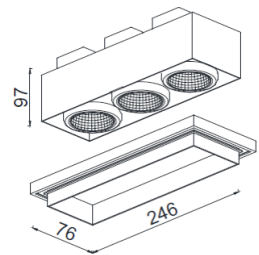

LKE107.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE107	3 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart



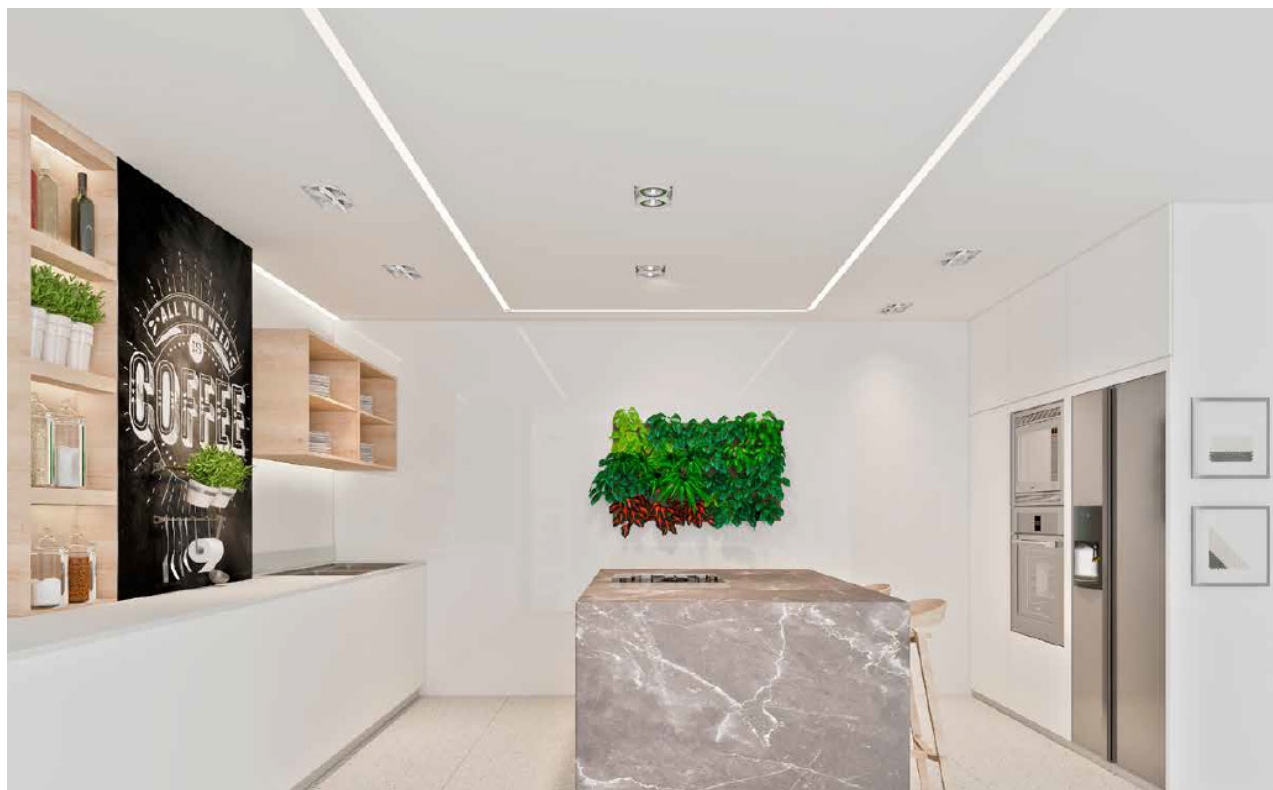


CUBIC Q1 – GU10 97102

LKE1 01


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	96x84 h87,5mm
Dimensions	106x101 h77,5mm
Adjustable	Yes



LKE101.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKE101	GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														



CUBIC Q2 – 2GU10 97186

LKE1 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	174x84 h87,5mm
Wattage	2 x GU10	Dimensions	101x190 h77,5mm
Lumen output	2 x GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



174x84mm

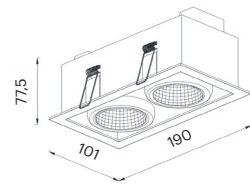

LKE102.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish										
LKE102	2 x GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														

CUBIC Q3 – 3GU10 97270

LKE1 03


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	3 x GU10
Lumen output	3 x GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	260x84 h87,5mm
Dimensions	270x101 h77,5mm
Adjustable	Yes

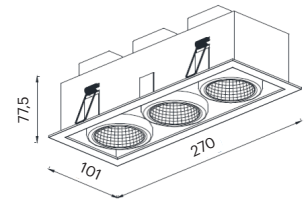

LKE103.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish
LKE103	3 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC QT1 97102

LKE1 04

GOOD NIGHT

Recessed

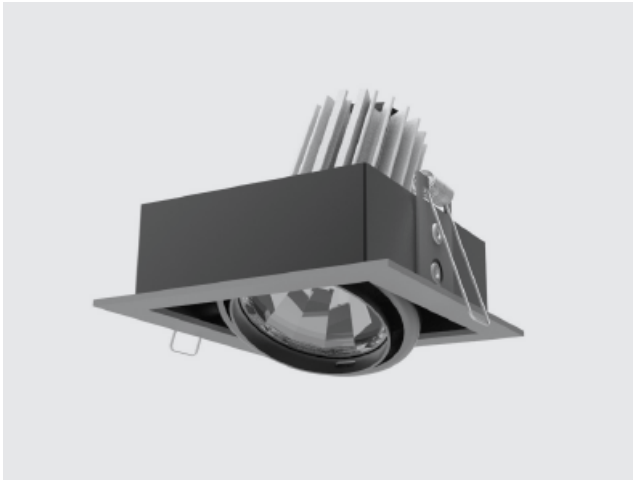

INDOOR

RECESSED



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	96x84 h90mm 96x84 h110mm
Dimensions	106x101 h89mm 106x101 h100mm
Adjustable	Yes

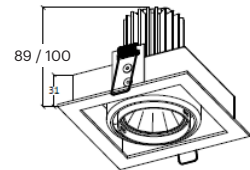

LKE104.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE104	9	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	12	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	

CUBIC Q1 – QR111 177177

LKE4 01

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	QR111 - GU10
Lumen output	QR111 - GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 - GU10
Life Time	QR111 - GU10
Cut-out Size	173x162 h125mm
Dimensions	177x177 h113mm
Adjustable	Yes



173x162mm



LKE401.QR111.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE401	QR111	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC Q2 – 2QR111 177323

LKE4 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x QR111 - GU10
Lumen output	2 x QR111 - GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 - GU10
Life Time	QR111 - GU10
Cut-out Size	315x162 h125mm
Dimensions	323x177 h113mm
Adjustable	Yes

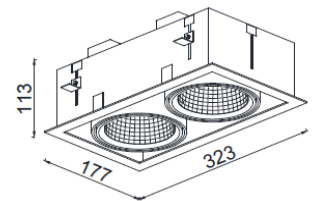

LKE402.QR111.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish										
LKE402	2 x QR111	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														

CUBIC Q3 – 3QR111 177468

LKE4 03


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	3 x QR111 - GU10
Lumen output	3 x QR111 -GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 - GU10
Life Time	QR111 - GU10
Cut-out Size	450x162 h125mm
Dimensions	468x177 h113mm
Adjustable	Yes

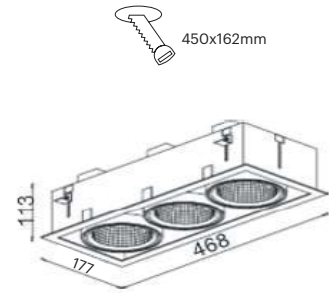

LKE403.QR111.XX.X.**



Number	W	Colour Temperature	Light Distribution	Finish
LKE403	3 x QR111	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC QT1 177177

LKE4 04


GOOD NIGHT

Recessed

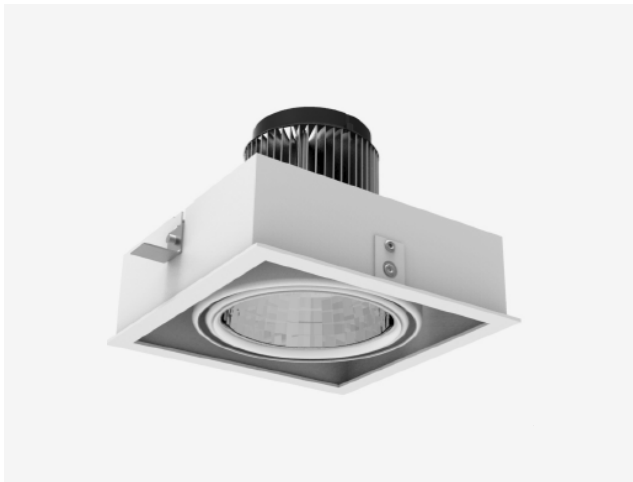

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	11,3W 16,5W 23,6W
Lumen output	2100 2900 3900
Connection	350mA / 500mA / 700mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	173x162 h170mm 173x162 h170mm 173x162 h210mm
Dimensions	177x177 h160mm 177x177 h160mm 177x177 h200mm
Adjustable	Yes

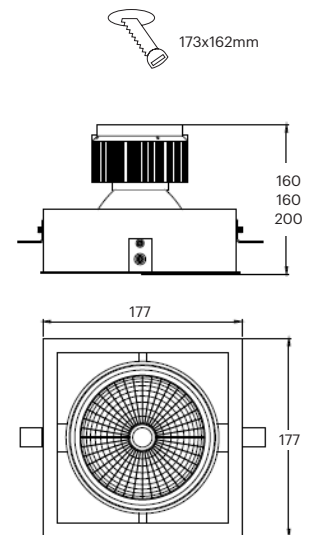

LKE404.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE404	11	27 2700	1 Narrow 14°	○ 10 White	● MO Metallic Copper
	16	30 3000	2 Medium 22°	● 20 Black	● NO Metallic Gold
	23	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	



CUBIC QT2 177323

LKE4 05

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2x11,3W 2x16,5W 2x23,6W
Lumen output	2x2100 2x2900 2x3900
Connection	350mA / 500mA / 700mA
Driver	Included (remote)
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	315x162 h170mm 315x162 h170mm 315x162 h210mm
Dimensions	177x323 h160mm 177x323 h160mm 177x323 h200mm
Adjustable	Yes

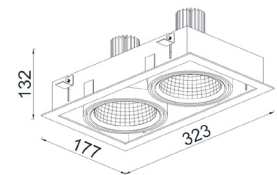

LKE405.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE405	11	27 2700	1 Narrow 14°	10 White	MO Metallic Copper
	16	30 3000	2 Medium 22°	20 Black	NO Metallic Gold
	23	40 4000	3 Wide 37°	40 Gold	PO Metallic Chrome
			4 Superwide 58°	CO Silver	RA RAL Chart
				BO Copper	

CUBIC QT3 177468

LKE4 06

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	3x11,3W 3x16,5W 3x23,6W
Lumen output	3x2100 3x2900 3x3900
Connection	350mA / 500mA / 700mA
Driver	Included (remote)
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	462x162 h170mm 462x162 h170mm 462x162 h210mm
Dimensions	177x468 h160mm 177x468 h160mm 177x468 h200mm
Adjustable	Yes

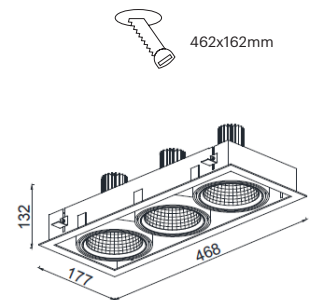

LKE406.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKE406	11	27 2700	1 Narrow 14°	○ 10 White	● MO Metallic Copper
	16	30 3000	2 Medium 22°	● 20 Black	● NO Metallic Gold
	23	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

INTUS – GU10

LKE5 01


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø90 h116mm
Dimensions	Ø96 h116mm
Adjustable	No

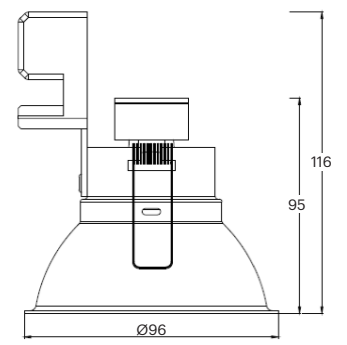

LKE501.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKE501	GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														



INTUS QT1

LKE5 01

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Ø90 h120mm Ø90 h140mm
Dimensions	Ø96 h110mm Ø96 h130mm
Adjustable	No



Ø90mm



LKE501.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKE501	5	27 2700	1 Narrow 12°	○ 10 White
	9	30 3000	2 Medium 24°	● 20 Black
		40 4000	3 Wide 36°	● 40 Gold
				● CO Silver
				● BO Copper
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				RA RAL Chart

INTRA – GU10

LKE5 02


GOOD NIGHT

Recessed




Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø90 h115mm
Dimensions	Ø96 h105mm
Adjustable	Yes

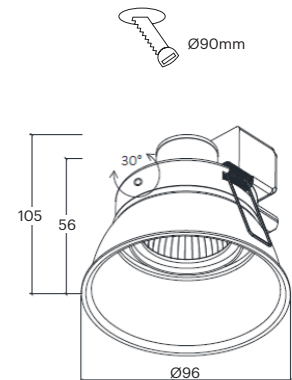

LKE502.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE502	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

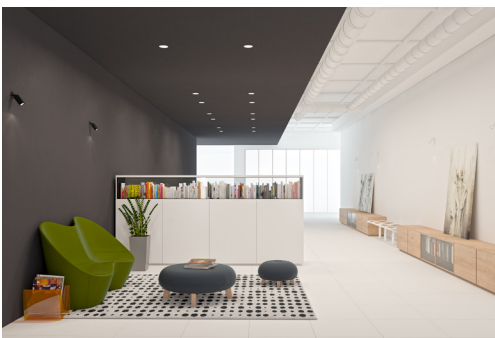

INTRA QT1

LKE5 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Ø90 h115mm Ø90 h135mm
Dimensions	Ø96 h105mm Ø96 h125mm
Adjustable	Yes



125mm (1200lm)
125mm (700lm)

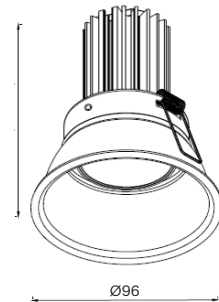

LKE502.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE502	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	9	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	



ALIPES – GU10

LKE7 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	Ø135 h74mm
Wattage	GU10	Dimensions	Ø146 h57mm
Lumen output	GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



Ø135mm

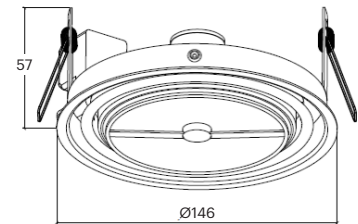

LKE702.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish
LKE702	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

VIAE QV 1


LKE8 01

GOOD NIGHT

Recessed




Installation	Indoor	CRI	> 80
Mounting Position	Wall recessed	Life Time	25.000 h
IP	20	Cut-out Size	175x40 h50mm
Wattage	1W	Dimmensions	188x55 h40mm
Lumen output	130	Adjustable	No
Connection	350mA		
Driver	Included (remote)		
Dimmable	Non-dimmable		

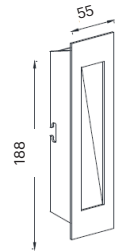

LKE801.1.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE801	1	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
		RE Red		CO Silver	RA RAL Chart
		BL Blue		BO Copper	

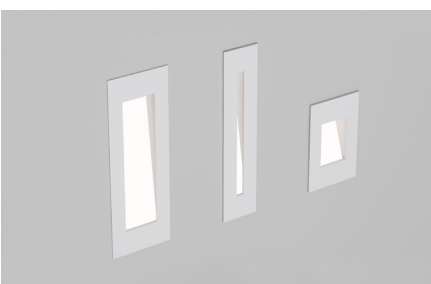


ARTUS QV 1


LKE8 02

GOOD NIGHT

Recessed




Installation	Indoor	CRI	> 80
Mounting Position	Wall recessed	Life Time	25.000 h
IP	20	Cut-out Size	155x22 h50mm
Wattage	1W	Dimensions	185x33 h40mm
Lumen output	130	Adjustable	No
Connection	350mA		
Driver	Included (remote)		
Dimmable	Non-dimmable		

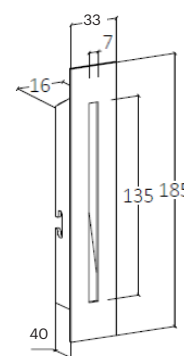

LKE802.1.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE802	1	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
		RE Red		CO Silver	RA RAL Chart
		BL Blue		BO Copper	

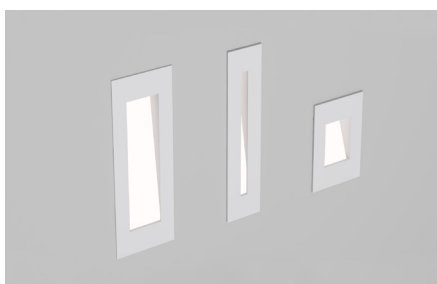


PAULLULUM QV 1


LKE8 03

GOOD NIGHT

Recessed




Installation	Indoor	CRI	> 80
Mounting Position	Wall recessed	Life Time	25.000 h
IP	20	Cut-out Size	85x40 h50mm
Wattage	1W	Dimensions	100x55 h40mm
Lumen output	130	Adjustable	No
Connection	350mA		
Driver	Included (remote)		
Dimmable	Non-dimmable		



LKE803.1.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE803	1	27 2700	5 Asymmetric	○ 10 White	● MO Metallic Copper
		30 3000		● 20 Black	● NO Metallic Gold
		40 4000		● 40 Gold	● PO Metallic Chrome
		27 Red		● CO Silver	RA RAL Chart
		27 Blue		● BO Copper	

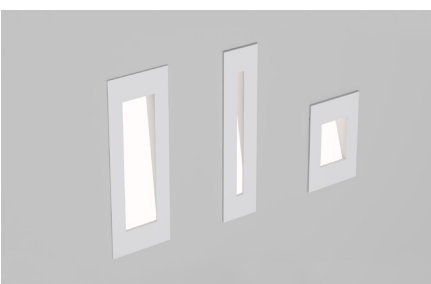

TECTUM QV 1

LKE9 03

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x 5W
Lumen output	2 x 700
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Upon request
Dimensions	1000x60 h60mm
Adjustable	No



Upon request

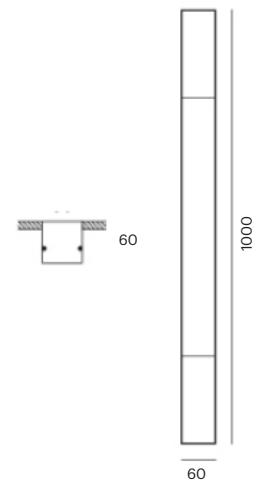

LKE903.8.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE903	10	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

BIG TECTUM QV 1

LKE9 04

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x 5W
Lumen output	2 x 700
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Upon request
Dimensions	2000x60 h60mm
Adjustable	No

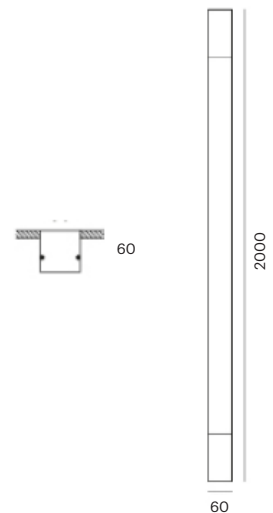

LKE904.8.**.5.**



Number	W	Colour Temperature	Light Distribution	Finish	
LKE904	10	27 2700	5 Asymmetric	○ 10 White	● MO Metallic Copper
		30 3000		● 20 Black	● NO Metallic Gold
		40 4000		● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	

VULTUS QV 1


LKE10 01

GOOD NIGHT



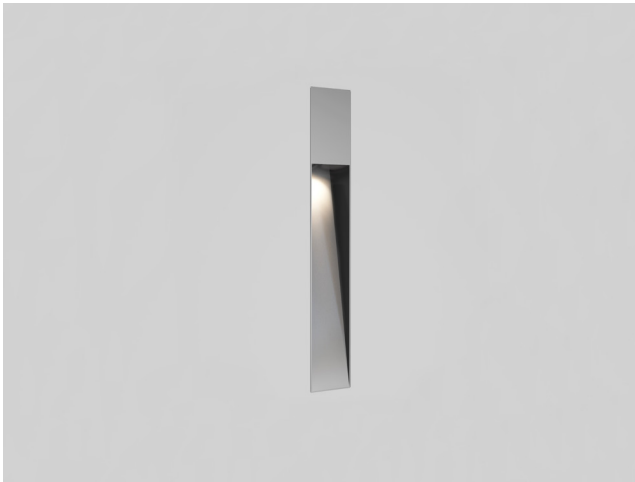



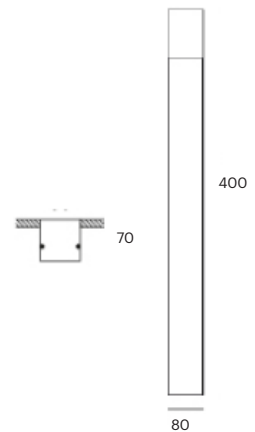


Recessed



Installation	Indoor	CRI	> 90
Mounting Position	Wall recessed	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	400x80 h80mm
Wattage	5W	Dimensions	400x80 h70mm
Lumen output	700	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimmable on request)		



LKE1001.8.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE1001	5	27 2700	 5 Asymmetric	 10 White	 MO Metallic Copper
		30 3000		 20 Black	 NO Metallic Gold
		40 4000		 40 Gold	 PO Metallic Chrome
				 CO Silver	RA RAL Chart
				 BO Copper	





BIG VULTUS QV 1

LKE10 02


GOOD NIGHT

Recessed

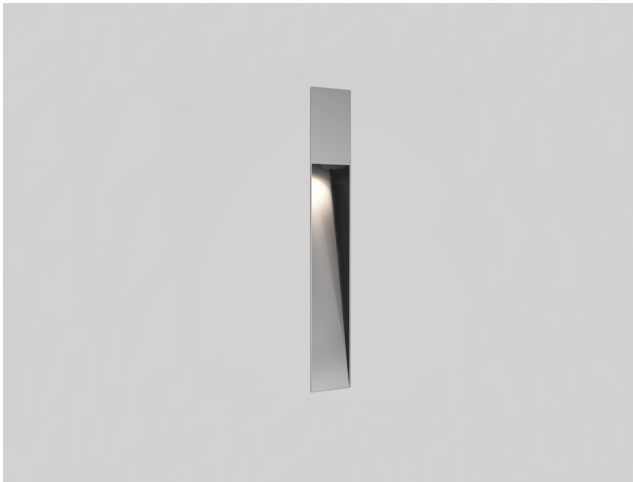


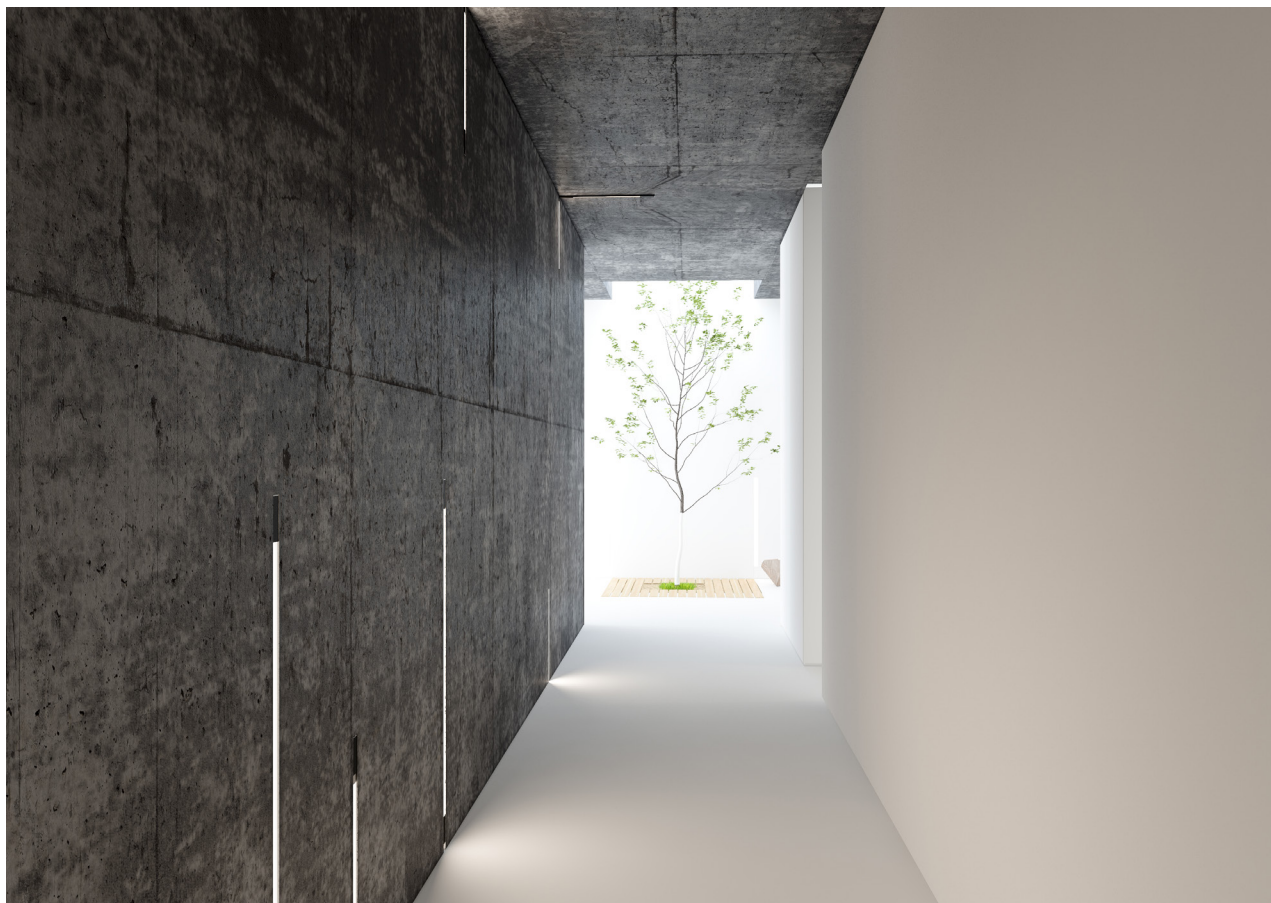
Installation	Indoor
Mounting Position	Wall recessed
IP	20
Wattage	8W
Lumen output	700
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	800x80 h80mm
Dimensions	800x80 h70mm
Adjustable	No

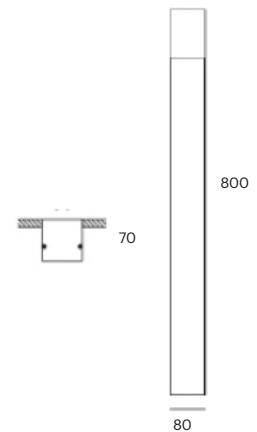

LKE1002.8.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE1002	8	27 2700	 5 Asymmetric	○ 10 White	● MO Metallic Copper
		30 3000		● 20 Black	● NO Metallic Gold
		40 4000		● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	




TIBI QV 1

LKE13 10

GOOD NIGHT

Recessed

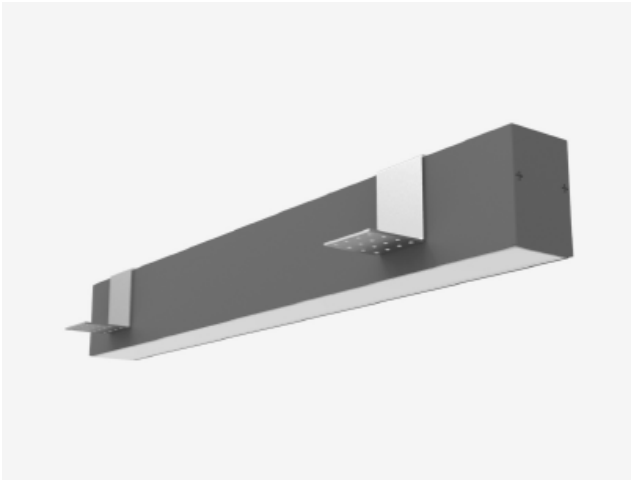

INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	12,3W 15,2W 24,1W
Lumen output	2000 3000 4000
Connection	230V
Driver	Included
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	Upon request
Dimensions	586 / 866 / 1146x44 h65mm
Adjustable	No

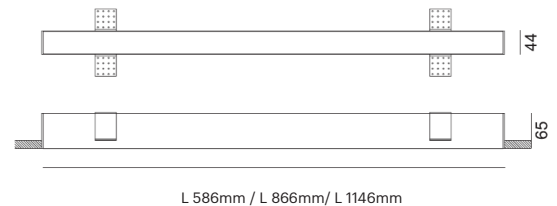

LKE1310.**.**.6.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE1310	12	27 2700	6 Opal	○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper
	15	30 3000		● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart
	24	40 4000		



DEXTER QV 1

LKE14 01

GOOD NIGHT

Recessed





DIMMABLE

CASAMBI

WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	21W
Lumen output	2900
Connection	230V
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	Upon request
Dimensions	309x44 h75mm
Adjustable	No

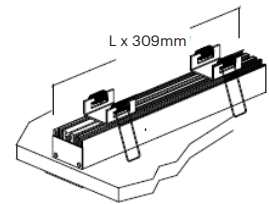

LKE1401.21.**.6.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE1401	21	27 2700	6 Opal	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				B0 Copper	

