

GOOD NIGHT


LUMIK Spot Light

BUXA TRACK

LKP1 03


GOOD NIGHT

Track




Installation	Indoor		
Mounting Position	Track		
IP	20		
Wattage	12W	17W	24W
Lumen output	2100	2900	3900
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø90x105 h150mm
Adjustable	Yes

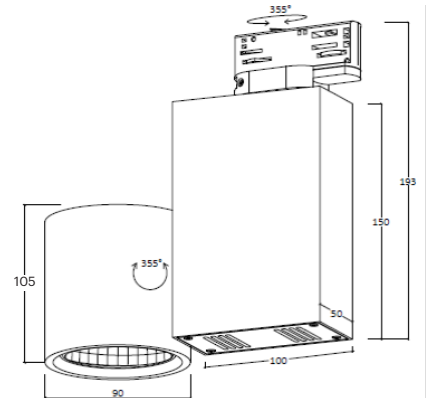

LKP103.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP103	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	


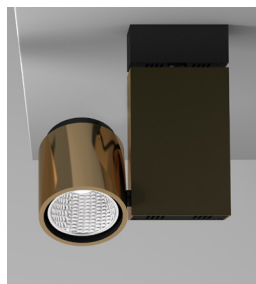


BUXA SURFACE

LKP1 04


GOOD NIGHT

Surface

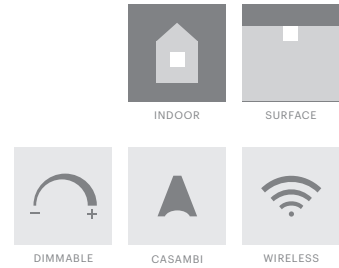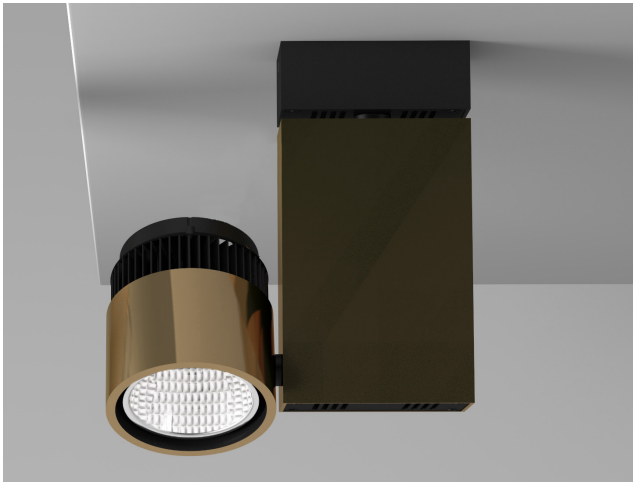

Installation	Indoor		
Mounting Position	Surface		
IP	20		
Wattage	12W	17W	24W
Lumen output	2100	2900	3900
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø90x105 h190mm
Adjustable	Yes

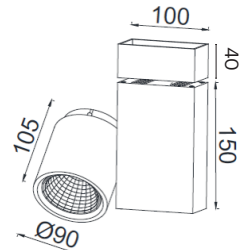

LKP104.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP104	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	




CAPIO TRACK

LKP1 05


GOOD NIGHT

Track



Installation	Indoor			
Mounting Position	Track			
IP	20			
Wattage	12W	17W	24W	
Lumen output	2100	2900	3900	
Connection	230V			
Driver	Included			
Dimmable	DALI, Push / Driver on request			

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø90x107 h150mm
Adjustable	Yes

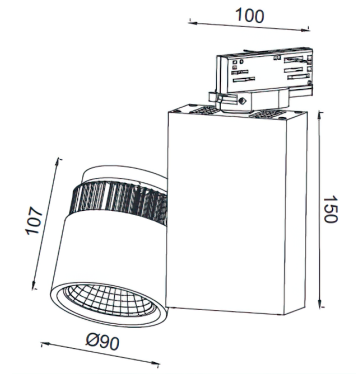

LKP105.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP105	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

CAPIO SURFACE

LKP1 06


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø90x107 h190mm
Adjustable	Yes

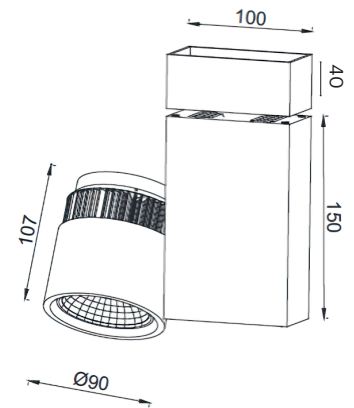

LKP106.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP106	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

CETERUS TRACK


LKP1 07

GOOD NIGHT

Track

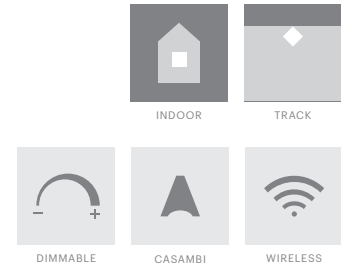

Installation	Indoor	CRI	> 90
Mounting Position	Track	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120x128 h150mm
Lumen output	2100 2900 3900	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

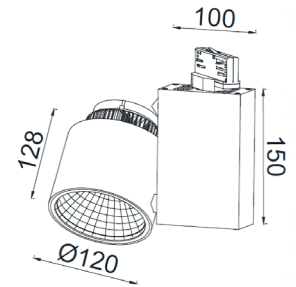

LKP107.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP107	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

CETERUS SURFACE


LKP1 08

GOOD NIGHT

Surface




Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120x128 h190mm
Lumen output	2100 2900 3900	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

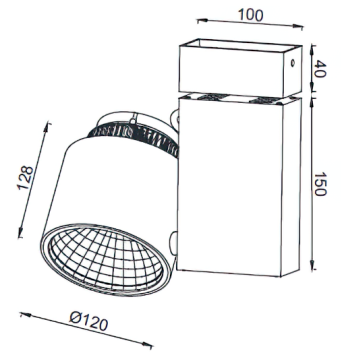

LKP108.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP108	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

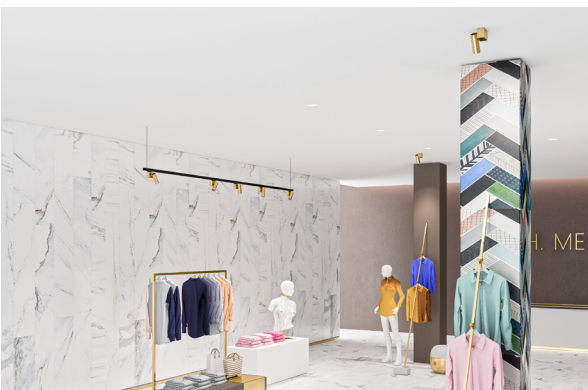


VERMIS TRACK – GU10

LKP2 01 GU10


GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x250 h105mm
Adjustable	Yes

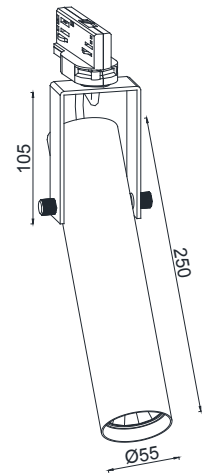

LKP201.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKP201	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




VERMIS TRACK

LKP2 01


GOOD NIGHT

Track

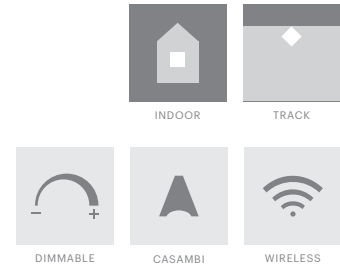

Installation	Indoor
Mounting Position	Track
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55x250 h105mm
Adjustable	Yes

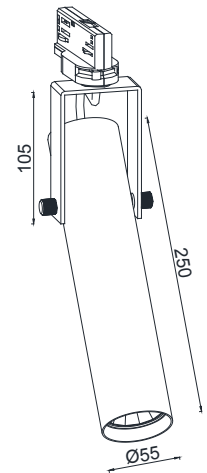

LKP201.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP201	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	9	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	

VERMIS SURFACE – GU10

LKP2 02 GU10


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x250 h130mm
Adjustable	Yes

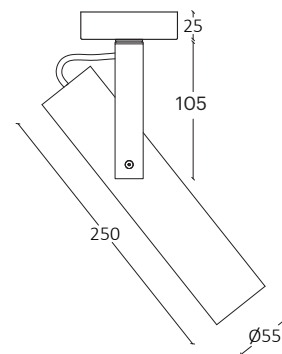

LKP202.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKP102	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

VERMIS SURFACE

LKP2 02


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55x250 h130mm
Adjustable	Yes

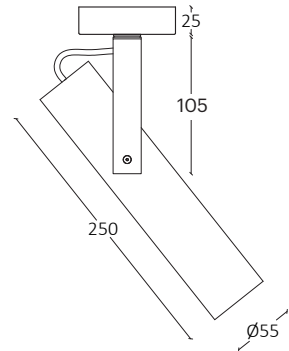

LKP202.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP202	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	9	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	

TALUS TRACK

LKP2 03


GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø95x250 h105mm
Adjustable	Yes

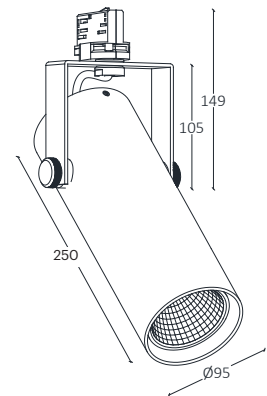

LKP203.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP203	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	






TALUS SURFACE

LKP2 04


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø95x250 h107mm
Adjustable	Yes

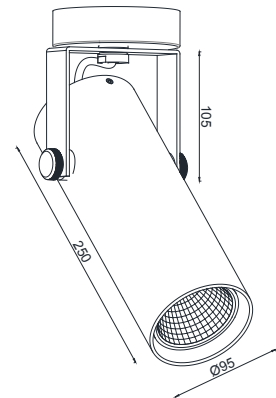

LKP204.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP204	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	






BIG TALUS TRACK

LKP4 01


GOOD NIGHT

Track



Installation	Indoor		
Mounting Position	Track		
IP	20		
Wattage	12W	17W	24W
Lumen output	2100	2900	3900
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø120x220 h135mm
Adjustable	Yes

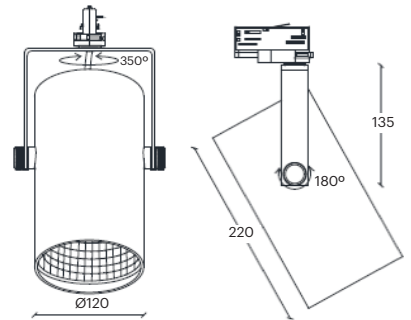

LKP401.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP401	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	




BIG TALUS SURFACE


LKP4 02

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120 h220mm
Lumen output	2100 2900 3900	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

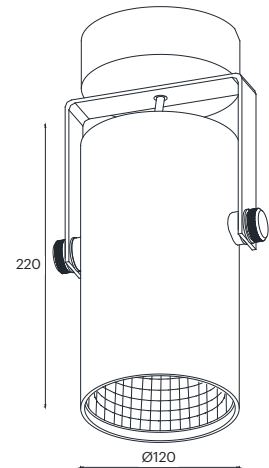

LKP402.**.*.*.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP402	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	





CALIX SURFACE – GU10

LKP5 01 GU10


GOOD NIGHT

Surface

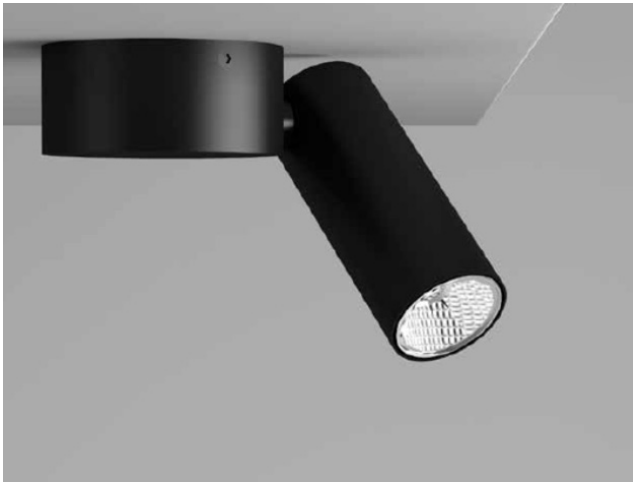

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h160mm / Ø105 h50mm
Adjustable	Yes

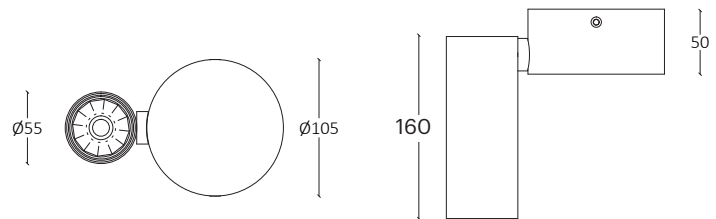

LKP501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKP501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart





CALIX SURFACE – GU10

LKP5 01 GU10


GOOD NIGHT

Surface

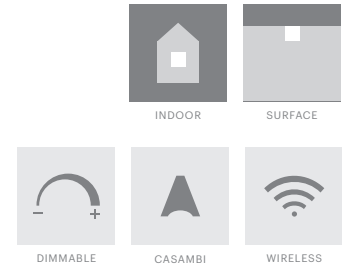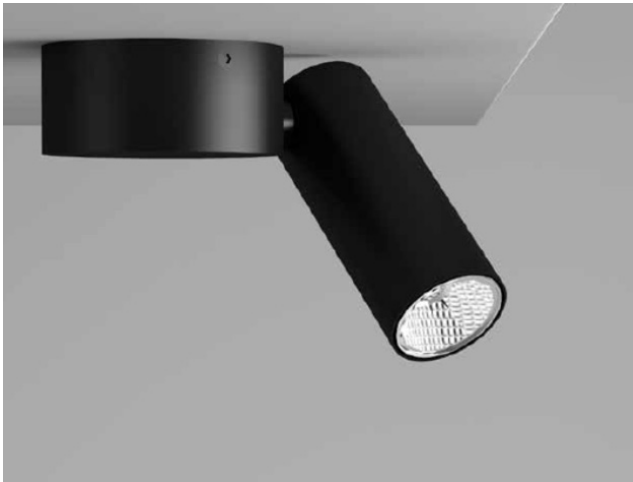

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h160mm / Ø105 h50mm
Adjustable	Yes

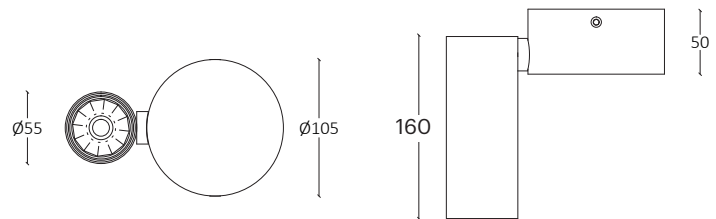

LKP501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKP501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




CALIX SURFACE

LKP5 01


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	5W 8W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55 h160mm / Ø105 h50mm
Adjustable	Yes

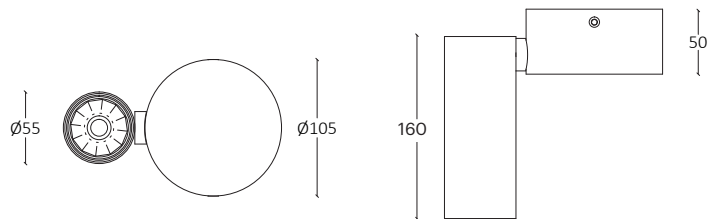

LKP501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP501	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	8	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	



