

GOOD NIGHT


LUMIK Wall Light

VINEA SQ GU10

LKA1 01



GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	60x60 h97mm
Adjustable	No

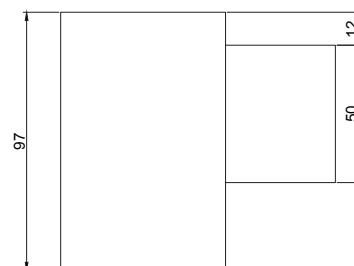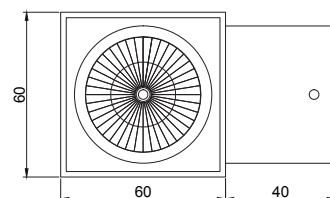

LKA101.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA101	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




VINEA SQ DOUBLE 2GU10

LKA1 02 UP & DOWN


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2xGU10
Lumen output	2xGU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	60x100 h180mm
Adjustable	No

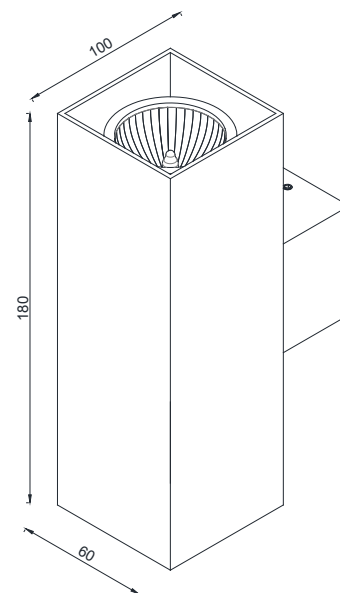

LKA102.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA102	2xGU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




PALPEBRA


LKA2 01

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 80
Mounting Position	Surface	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	1W	Dimensions	100x100 h48mm
Lumen output	120	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	No		

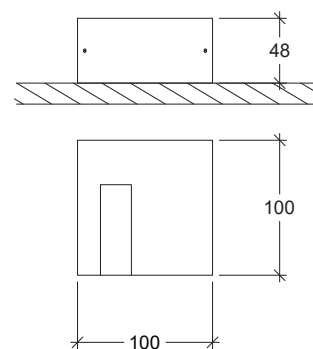

LKA201.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKA201	1	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
				40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

PLANUS

LKA3 01 UP & DOWN


GOOD NIGHT

Surface




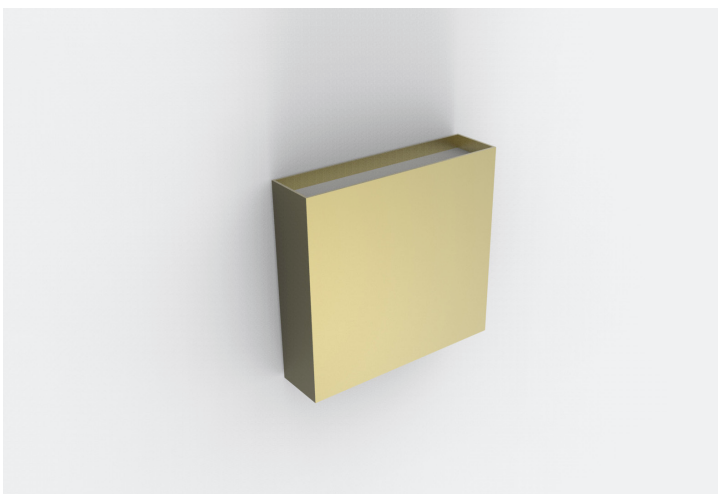
Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2 x 4W
Lumen output	2 x 695
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 B10 72.000 h
Cut-out Size	-
Dimensions	160x150 h40mm
Adjustable	No

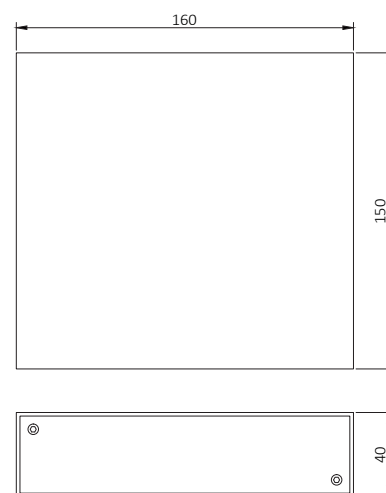

LKA301.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA301	8	27 2700 30 3000 40 4000	 6 Opal 120° (Up & Down)	○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart







VINEA ROUND GU10

LKA4 01



GOOD NIGHT

Surface

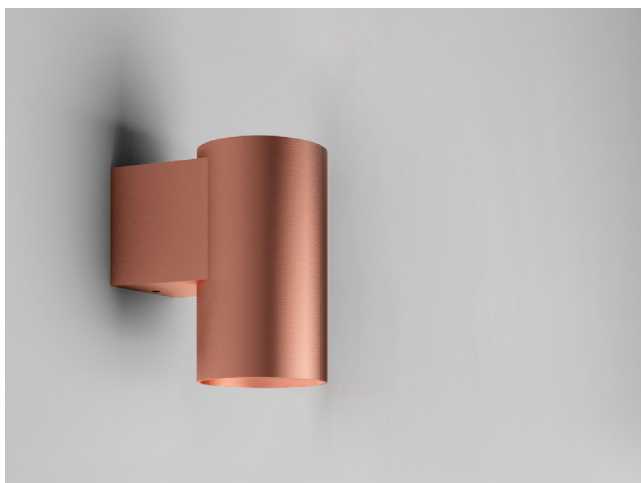

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp


CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x89 h97mm
Adjustable	No

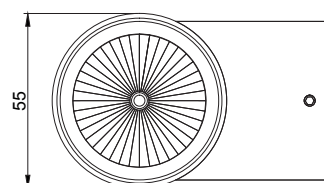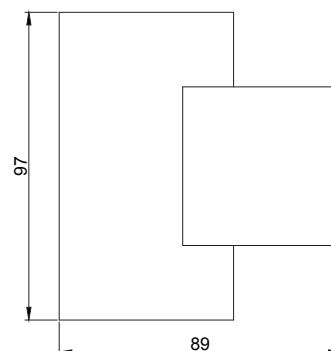

LKA401.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA401	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome

RA RAL Chart

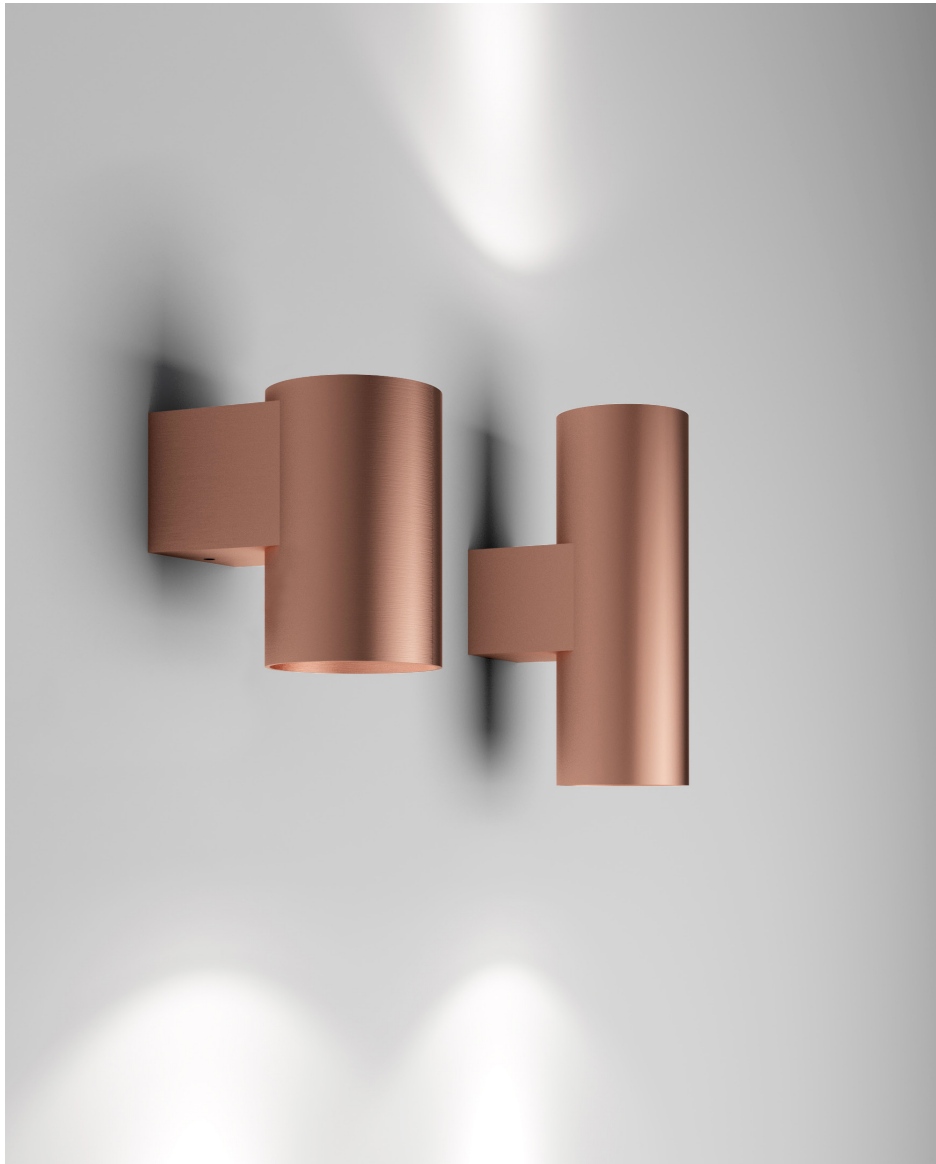


VINEA ROUND DOUBLE 2 x GU10

LKA4 02



GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2xGU10
Lumen output	2xGU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x89 h175mm
Adjustable	No

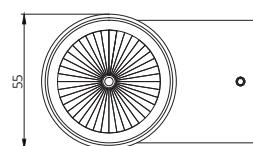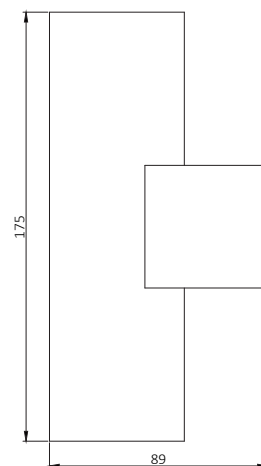

LKA402.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA402	2xGU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> <li style="width: 50%;">○ 10 White <li style="width: 50%;">● MO Metallic Copper <li style="width: 50%;">● 20 Black <li style="width: 50%;">● NO Metallic Gold <li style="width: 50%;">● 40 Gold <li style="width: 50%;">● PO Metallic Chrome <li style="width: 50%;">● CO Silver <li style="width: 50%;">RA RAL Chart <li style="width: 50%;">● BO Copper



LUDERE

LKA5 01

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	7W	Dimensions	620x200 h70mm
Lumen output	560	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

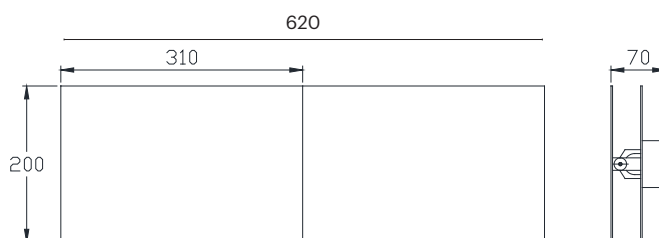

LKA501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKA501	7	27 2700	6 Opal 120° (Up / Down)	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	




LUDO


LKA5 02

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	7W	Dimensions	620x200 h70mm
Lumen output	560	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

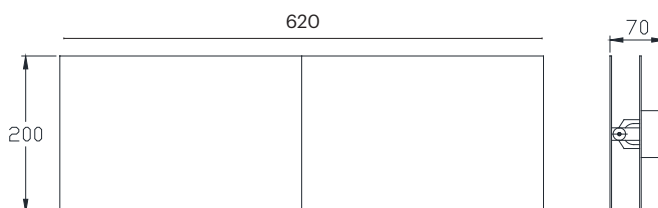

LKA502.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKA502	7	27 2700	6 Opal 120° (Up / Down)	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	





STABULUM 650

LKA6 22 646MM


GOOD NIGHT

Surface

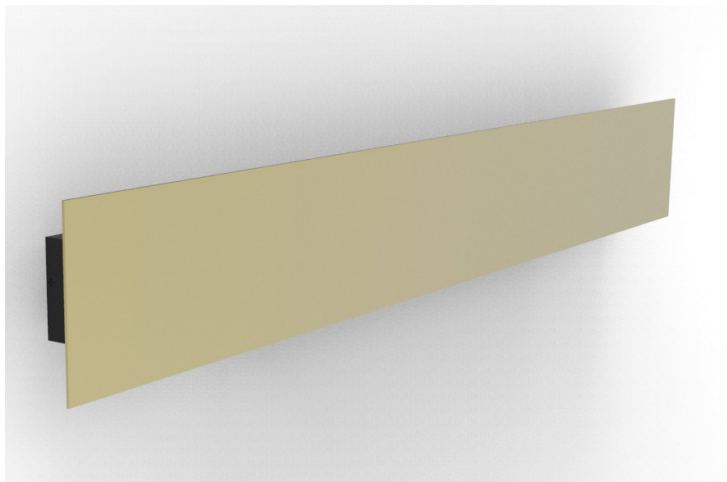

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	8W 12W 18W
Lumen output	1400 2000 2700
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	646x58,5 h125mm
Adjustable	No

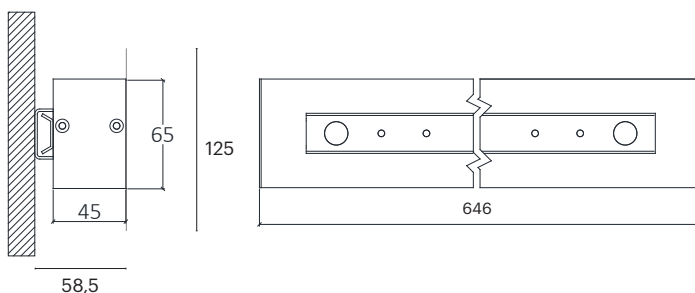

LKA622.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKA622	8	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	18	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	





STABILUM 930

LKA6 23 926MM


GOOD NIGHT

Surface

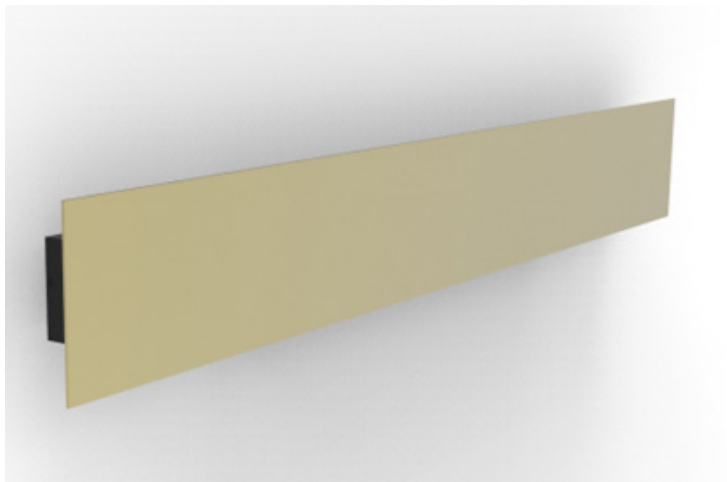

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 18W 28W
Lumen output	2300 3200 4300
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	926x58,5 h125mm
Adjustable	No

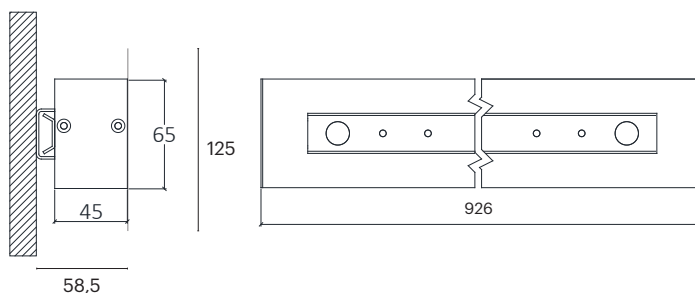

LKA222.**.**.**



Number	W	Colour Temperature	Light Distribution	Finish										
LKA222	12	27 2700	6 Opal 120°	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														
	18	30 3000												
	28	40 4000												

STABULUM 1200

LKA6 24 1206 MM


GOOD NIGHT

Surface

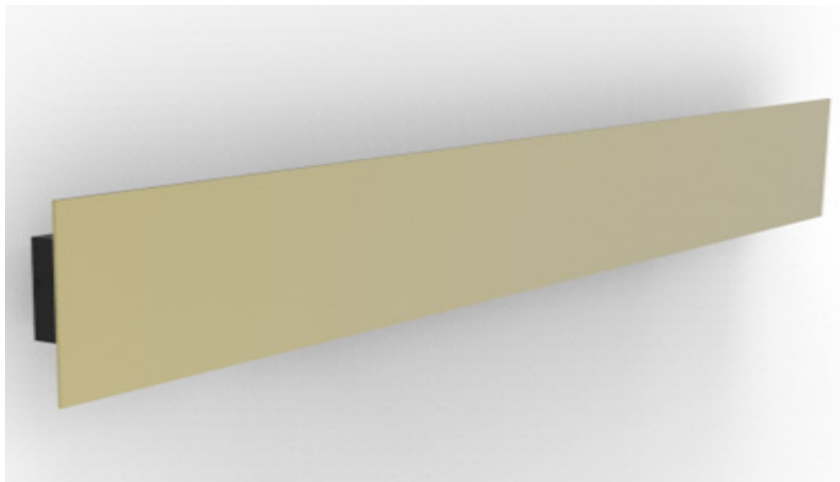

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	16W 24W 35W
Lumen output	3000 4200 5700
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1206x58,5 h125mm
Adjustable	No

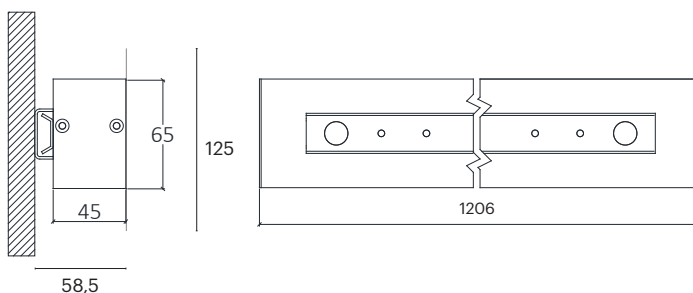

LKA624.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA624	16	27 2700	6 Opal 120°	<ul style="list-style-type: none"> 10 White 20 Black 40 Gold CO Silver BO Copper
	24	30 3000		<ul style="list-style-type: none"> MO Metallic Copper NO Metallic Gold PO Metallic Chrome
	35	40 4000		<p>RA RAL Chart</p>

FIRMUS 600

LKA6 10 586MM


GOOD NIGHT

Surface




Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	8W 12W 18W
Lumen output	1400 2000 2700
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	586x78,5 h65mm
Adjustable	No

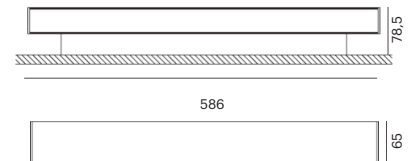

LKA610.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA610	8	27 2700	6 Opal 120°	10 White MO Metallic Copper
	12	30 3000		20 Black NO Metallic Gold
	18	40 4000		40 Gold PO Metallic Chrome
				CO Silver RA RAL Chart
				BO Copper

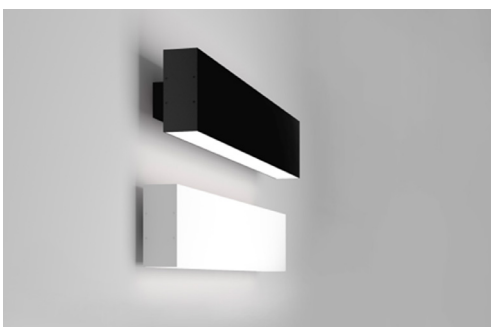


FIRMUS 900

LKA6 11 866MM


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 18W 26W
Lumen output	2100 3000 4100
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x78,5 h65mm
Adjustable	No

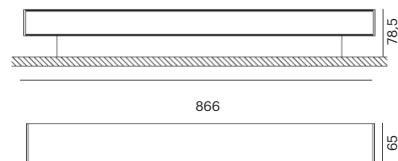

LKA611.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKA611	12	27 2700	6 Opal 120°	○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper	● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart
	18	30 3000			
	26	40 4000			

FIRMUS 1200

LKA6 12 1146MM


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	16W 24W 35W
Lumen output	2800 4000 5400
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1146x78,5 h65mm
Adjustable	No

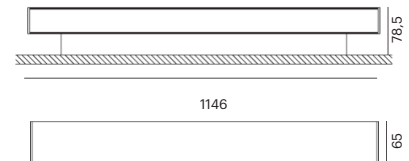

LKA612.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish										
LKA612	16	27 2700	6 Opal 120°	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														
	24	30 3000												
	35	40 4000												

FIRMUS DOUBLE 600


LKA7 16 586MM UP & DOWN

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	2 x 8W 2 x 12W 2 x 18W	Dimensions	586x54,5 h100mm
Lumen output	2 x 1400 2 x 2000 2 x 2700	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

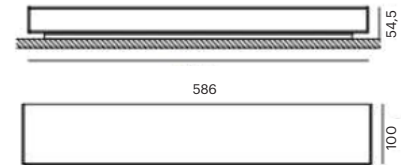

LKA716.**.**.**



Number	W	Colour Temperature	Light Distribution	Finish
LKA716	16	27 2700	6 Opal 120° (Up & Down)	○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper
	24	30 3000		● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome
	36	40 4000		RA RAL Chart

IMMOBILIS DOUBLE 600

LKA7 25 586MM UP & DOWN


GOOD NIGHT

Surface

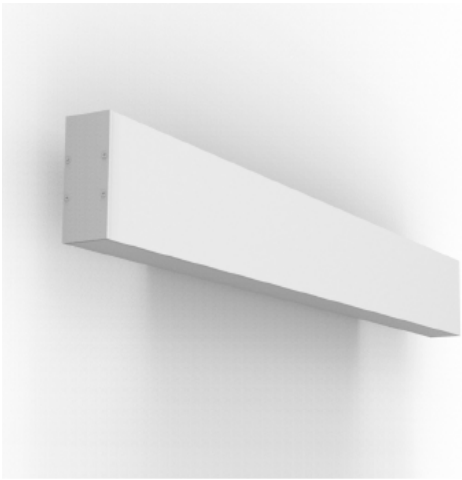

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2 x 8W 2 x 12W 2 x 18W
Lumen output	2 x 1400 2 x 2000 2 x 2700
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	586x78,5 h100mm
Adjustable	No

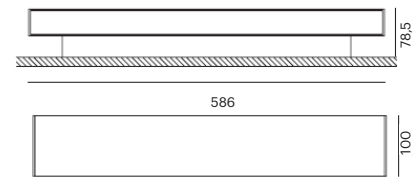

LKA725.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKA725	16	27 2700	6 Opal 120° (Up & Down)	10 White	MO Metallic Copper
	24	30 3000		20 Black	NO Metallic Gold
	36	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

IMMOBILIS DOUBLE 900

LKA7 26 866MM UP & DOWN

GOOD NIGHT

Surface

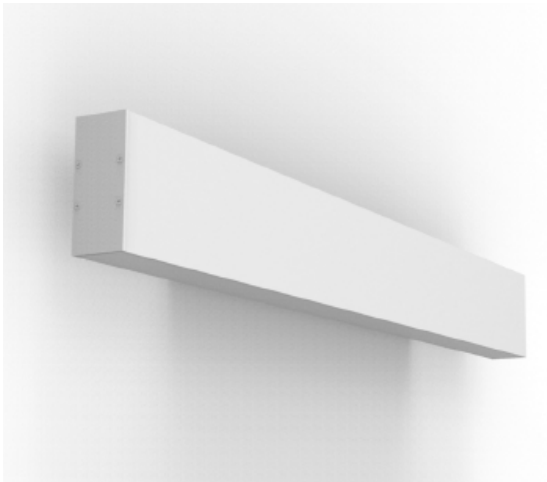

INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2 x 12W 2 x 18W 2 x 26W
Lumen output	2 x 2100 2 x 3000 2 x 4100
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x78,5 h100mm
Adjustable	No

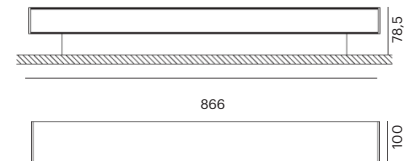

LKA726.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKA726	24	27 2700	6 Opal 120° (Up & Down)	○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper
	36	30 3000		● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome
	52	40 4000		RA RAL Chart

IMMOBILIS DOUBLE 1200

LKA7 27 1146MM UP & DOWN

GOOD NIGHT

Surface

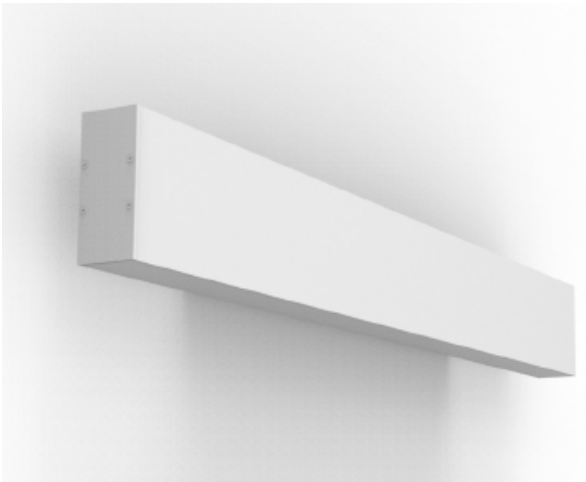

INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	2 x 16W 2 x 24W 2 x 34W	Dimensions	1146x78,5 h100mm
Lumen output	2 x 2800 2 x 4000 2 x 5400	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

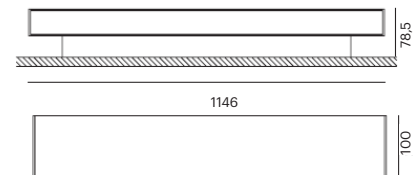

LKA727.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKA727	32	27 2700	6 Opal 120° (Up & Down)	10 White	MO Metallic Copper
	48	30 3000		20 Black	NO Metallic Gold
	68	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

GUTTA MURUS GU10

LKA5 01


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø120x162 h160mm
Adjustable	Yes

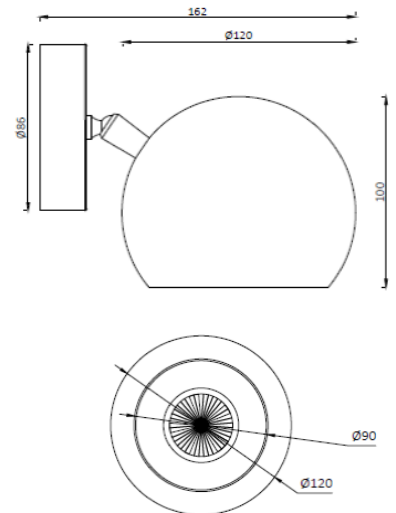

LKA501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome <p>RA RAL Chart</p>

