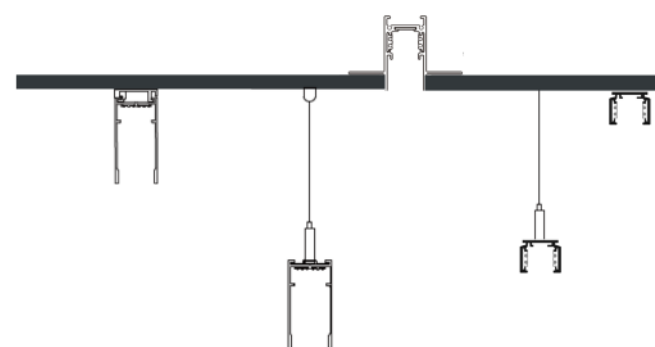
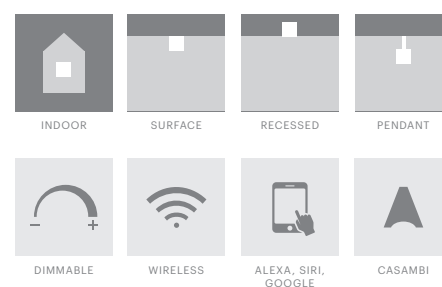




MGS48 is a system that is smart, modular and very easy to install. Its magnetic system allows for great flexibility with the lighting design of each space and lets us decide at the last moment which models we are going to use, since we can install the luminaires without the need for screws or any kind of tool. And, on top of that, the end user has the possibility to change the lighting design of his room depending on the needs of each moment. These qualities make the MGS48 system one of the most adaptable to current needs, plus we should always keep in mind that it also adjusts well to different kind of budgets



Suspended, Surface & Recessed





RIERA ORDEIX SHOP / PROJECT: SANDRA SOLER STUDIO / PHOTO: MONTSE CAPDEVILA

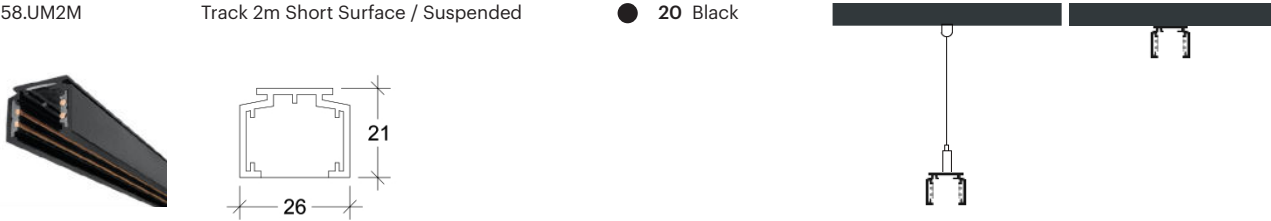


RIERA ORDEIX SHOP / PROJECT: SANDRA SOLER STUDIO / PHOTO: MONTSE CAPDEVILA

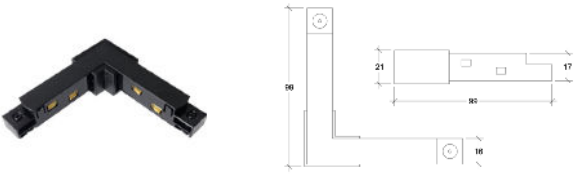

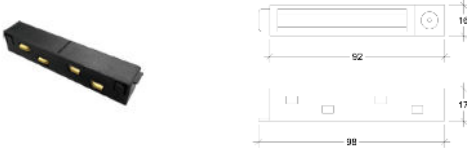
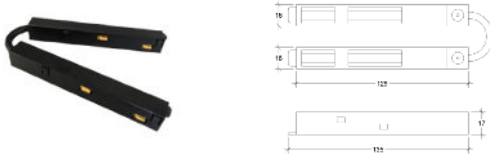


PROJECT: SANDRA SOLER STUDIO

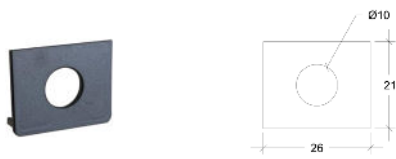
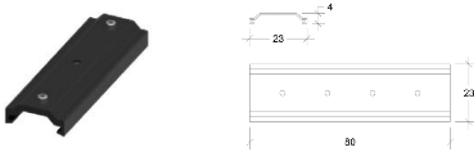
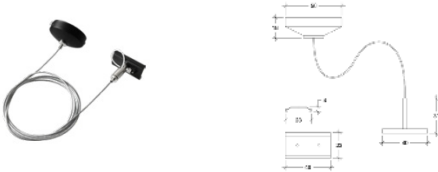
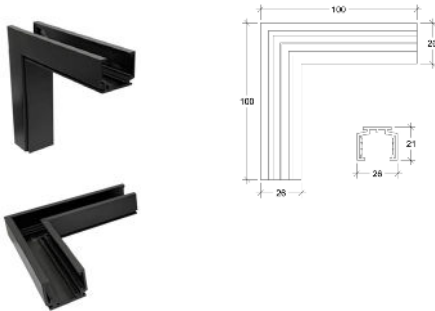
1. Profile

Reference	Description	Finish	
58.UM2M	Track 2m Short Surface / Suspended	● 20 Black	

2. Accessories


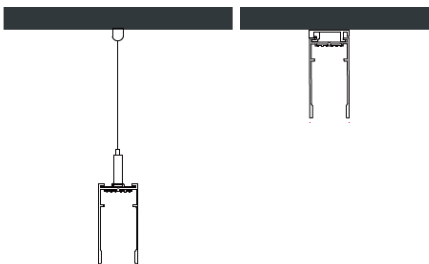
Reference	Description	Detail
58.UMLCON	L Connector for ceiling	
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	
58.UMI	I Connector	
58.UMFA	Flexible Connector	
58.UMGNW	End Cover	





Reference	Description	Detail
58.UMGW	End Cover with side hole for wire	
58.UMLCOU	Coupler 180° between track-track or corner-track	
58.UMD	Pendant Kit	
58.UMA 58.UMB	L Corner 90° Horizontal - mechanical L Corner 90° Vertical - mechanical	

1. Profile




Reference	Description	Finish
58.UMA2M	Track 2m High Surface / Suspended	● 20 Black

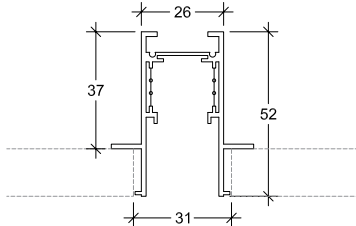
2. Accessories

Reference	Description	Detail
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	 
58.UMI	I Connector	 
58.UMFA	Flexible Connector	 
58.UMABGNW	End Cover	 
58.UMABGW	End Cover with side hole for wire	 





Reference	Description	Detail
58.UMABD	Pendant Kit	 
58.UMBA	L Corner 90° Horizontal - mechanical	 
58.UMABL	Coupler 180° between track-track or corner-track	 
58.UMABM	Dust-Proof Cover 1.00 M	 




1. Profile

Reference	Description	Finish
58UMBM2	Track Recessed 2.00 M	● 20 Black
		

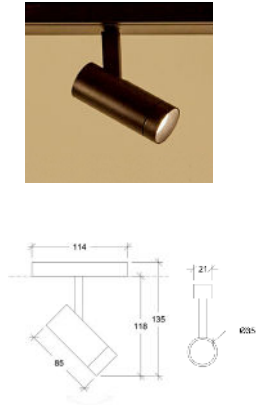
2. Accessories

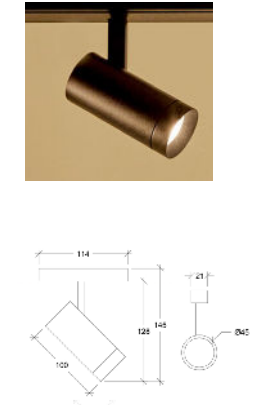
Reference	Description	Detail
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	 
58.UMI	I Connector	 
58.UMFA	Flexible Connector	 
58.UMABGNW	End Cover	 
58.UMABGW	End Cover with side hole for wire	 

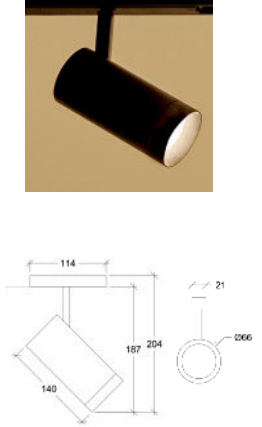


Reference	Description	Detail
58.UMABD	Pendant Kit	 
58.UMBA	L Corner 90° Horizontal - mechanical	 
58.UMABL	Coupler 180° between track-track or corner-track	 
58.UMABM	Dust-Proof Cover 1.00 M	 

3. Light Modules

NANO PUNCTO	Number	Description	W	CCT	Beam angle	Lm	Finish	Dim
	58110.6.27.1.20.NDI	Spotlight S	6	2700K	15°	480	● 20 Black	NDI
	58110.6.27.2.20.NDI	Spotlight S	6	2700K	24°	480	● 20 Black	NDI
	58110.6.27.3.20.NDI	Spotlight S	6	2700K	36°	480	● 20 Black	NDI
	58110.6.30.1.20.DAL	Spotlight S	6	3000K	15°	480	● 20 Black	DALI
	58110.6.30.2.20.DAL	Spotlight S	6	3000K	24°	480	● 20 Black	DALI
	58110.6.30.3.20.DAL	Spotlight S	6	3000K	36°	480	● 20 Black	DALI

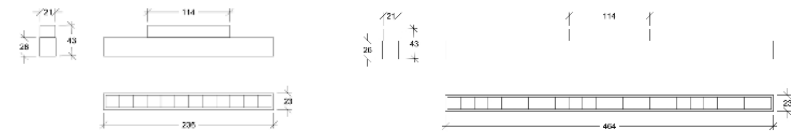
MICRO PUNCTO	Number	Description	W	CCT	Beam angle	Lm	Finish	Dim
	58110.12.27.1.20.DAL	Spotlight M	12	2700K	15°	1010	● 20 Black	DALI
	58110.12.27.2.20.DAL	Spotlight M	12	2700K	24°	1010	● 20 Black	DALI
	58110.12.27.3.20.DAL	Spotlight M	12	2700K	36°	1010	● 20 Black	DALI
	58110.12.30.1.20.DAL	Spotlight M	12	3000K	15°	1010	● 20 Black	DALI
	58110.12.30.2.20.DAL	Spotlight M	12	3000K	24°	1010	● 20 Black	DALI
	58110.12.30.3.20.DAL	Spotlight M	12	3000K	36°	1010	● 20 Black	DALI

PUNCTO	Number	Description	W	CCT	Beam angle	Lm	Finish	Dim
	58110.30.30.1.20.DAL	Spotlight L	30	3000K	15°	2400	● 20 Black	DALI
	58110.30.30.2.20.DAL	Spotlight L	30	3000K	24°	2400	● 20 Black	DALI
	58110.30.30.3.20.DAL	Spotlight L	30	3000K	36°	2400	● 20 Black	DALI

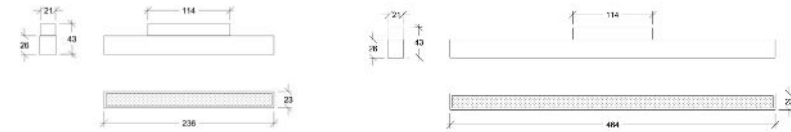


3. Light Modules


PANOPTES	Number	Description	W	CCT	Beam angle	Lm	Finish	Dim
	58120.8.27.2.20.NDI	Linearlight S 236 mm	8	2700K	24°	400	● 20 Black	NDI
	58120.8.27.3.20.NDI	Linearlight S 236 mm	8	2700K	45°	400	● 20 Black	NDI
	58120.16.30.2.20.DAL	Linearlight M 464 mm	16	3000K	24°	1040	● 20 Black	DALI
	58120.16.30.3.20.DAL	Linearlight M 464 mm	16	3000K	45°	1040	● 20 Black	DALI



CONTINUUM	Number	Description	W	CCT	Beam angle	Lm	Finish	Dim
	58120.8.27.6.20.NDI	Linear Opal S 236 mm	8	2700K	100°	350	● 20 Black	NDI
	58120.16.30.6.20.DAL	Linear Opal M 464 mm	16	3000K	100°	850	● 20 Black	DALI









POLYPHEMUS	Number	Description	W	CCT	Beam angle	Lm	Finish	Dim
	58130.10.30.1.20.DAL	Pendant Light	10	3000K	15°	800	● 20 Black	DALI
	58130.10.30.2.20.DAL	Pendant Light	10	3000K	25°	800	● 20 Black	DALI
	58130.10.30.3.20.DAL	Pendant Light	10	3000K	35°	800	● 20 Black	DALI












PROJECT: SANDRA SOLER STUDIO

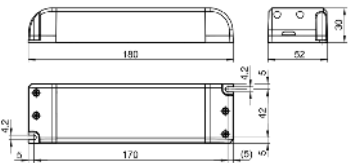
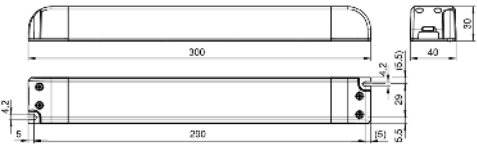


4. Accessories Summary

Detail	Reference	Description	Short	High	Rec	Finish	
	58.UMF30	Power Inlet Connector with Cable 30cm ON-OFF	x	x	x	● 20 Black	
	58.UMF30DAL	Power Inlet Connector with Cable 30cm DALI	x	x	x	● 20 Black	
	58.UMF60	Power Inlet Connector with Cable 180cm ON-OFF	x	x	x	● 20 Black	
	58.UMF60DAL	Power Inlet Connector with Cable 180cm DALI	x	x	x	● 20 Black	
	58.UMI	I Connector	x	x	x	● 20 Black	
	58.UMFA	Flexible Connector	x	x	x	● 20 Black	
	58.UMLCON	L Connector for ceiling	x	-	-	● 20 Black	
	58.UMA	L Corner 90° Horizontal - mechanical	x	-	-	● 20 Black	
	58.UMB	L Corner 90° Vertical - mechanical	x	-	-	● 20 Black	
	58.UMAA	L Corner 90° Horizontal - mechanical	-	x	-	● 20 Black	
	58.UMBA	L Corner 90° Horizontal - mechanical	-	-	x	● 20 Black	

Detail	Reference	Description	Short	High	Rec	Finish	
	58.UMD	Pendant Kit	x	-	-	● 20 Black	
	58.UMABD	Pendant Kit	-	x	x	● 20 Black	
	58.UMLCOU	Coupler 180° between track-track or corner-track	x	-	-	● 20 Black	
	58.UMABL	Coupler 180° between track-track or corner-track	-	x	x	● 20 Black	
	58.UMGNW	End Cover	x	-	-	● 20 Black	
	58.UMGW	End Cover with side hole for wire	x	-	-	● 20 Black	
	58.UMABGNW	End Cover	-	x	x	● 20 Black	
	58.UMABGW	End Cover with side hole for wire	-	x	x	● 20 Black	
	58.UMABM	Dust-Proof Cover 1.00 M	-	x	x	● 20 Black	

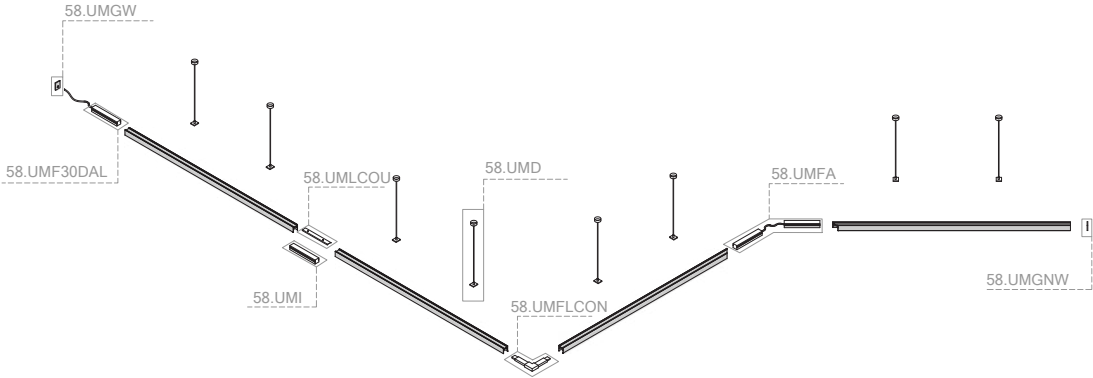
5. Drivers

Reference	Description	W
D48120	Driver 48VDC 75W VSLH 186691	75W
		
D4875	Driver 48VDC 120W VSLH 186692	120W
		

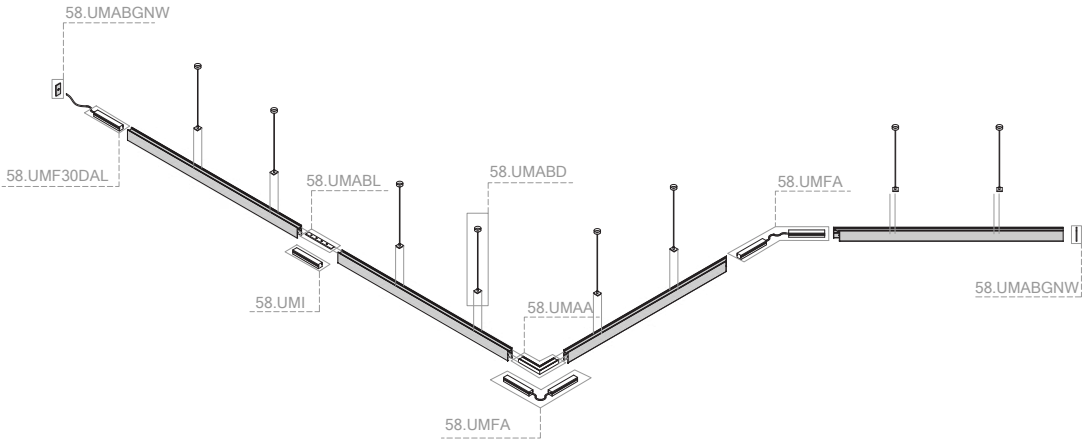


6. Examples

Profile 58.UM2M Short Suspended



Profile 58.UMA2M High Suspended



Profile 58.UM2M2 Recessed

