


Rotundus-UGR<19

10105


GOOD NIGHT

Recessed

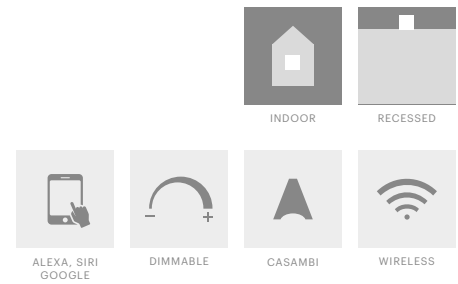

| | |
|--------------------------|---|
| Installation | Indoor |
| Mounting Position | Ceiling recessed |
| IP | 20 |
| Wattage | 25W |
| Lumen output | 2500 |
| Connection | 600mA |
| Driver | Included remote |
| Dimmable* | ON/OFF, DALI, PUSH (dimmable drivers on request) |

| | |
|---------------------|-------------|
| CRI | >85 |
| Life Time | 40.000 h |
| Cut-out Size | Ø200 h140mm |
| Dimensions | Ø215 h120mm |
| Adjustable | No |

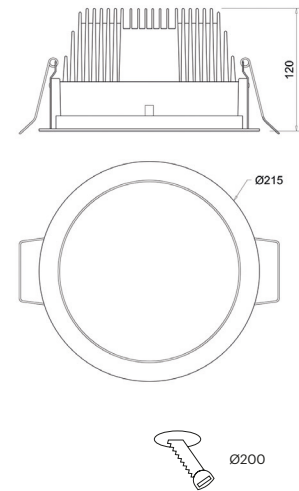

10105.25.**.3.10

| Number | W | Colour Temperature | Light Distribution | Finish | Dim |
|--------|----|--------------------|--------------------|------------|--|
| 10105 | 25 | 30 3000 40 4000 | 3 Wide 80° | ○ 10 White | NDI* Driver included (non-dimmable) Dimmable driver upon request |

