

Elis


419

GOOD NIGHT


Compact Profiles

GOOD NIGHT

Surface

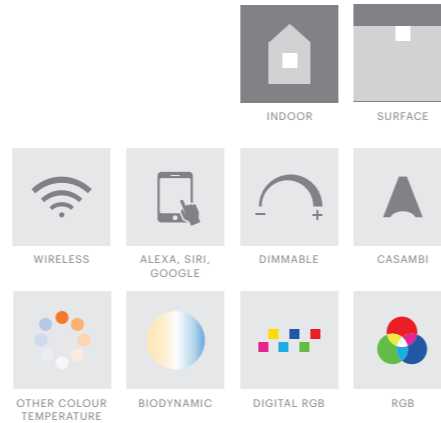

Designed to provide convenient lighting solutions without the need for recessed installation. This luminaire offers the unique advantage of delivering linear light along walls effortlessly, eliminating the necessity for intricate plasterboard work. With its easy installation process, it seamlessly replaces traditional fixtures, making it a versatile choice for a variety of settings. Say goodbye to the hassle of recessed lighting and embrace the simplicity and efficiency of our surface luminaire.

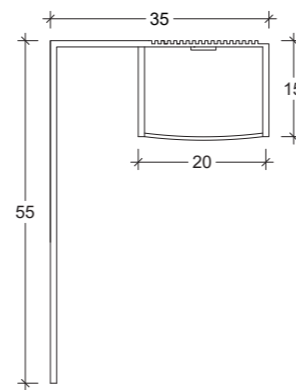

3. Endcap

Reference	Description	Finish
419.10	Elis endcap white (1 unit)	○ 10 White
419.20	Elis endcap black (1 unit)	● 20 Black
419.30	Elis endcap aluminium (1 unit)	● 30 Aluminium



4. Driver

See drivers section



1. Profile

Reference	Description	Mounting	Finish
419.00.10.M	Elis	Surface	○ 10 White
419.00.20.M	Elis	Surface	● 20 Black
419.00.30.M	Elis	Surface	● 30 Aluminium

2. Cover

Reference	Description	Finish
419.01.01.M	Cover	Opal
419.01.02.M	Cover	Transparent

5. LED Strip

Reference	Description	K	IP	LED Pitch	width	Wattage	Density	Flux	Elis
40806.27.20.M	LEDstrip teM 4,8W 2700K IP20 60/C90/4mm	2700K	20	50	4	4,8	60	450	●
40806.30.20.M	LEDstrip teM 4,8W 3000K IP20 60/C90/4mm	3000K	20	50	4	4,8	60	450	●
40806.40.20.M	LEDstrip teM 4,8W 4000K IP20 60/C90/4mm	4000K	20	50	4	4,8	60	450	●
40509.22.20.M	LEDstrip Tem-9,6W 2200K IP20 120/C80/8mm	2200K	20	10	8	9,6	120	840	●
40509.27.20.M	LEDstrip Tem-9,6W 2700K IP20 120/C80/8mm	2700K	20	10	8	9,6	120	840	●
40509.30.20.M	LEDstrip Tem-9,6W 3000K IP20 120/C80/8mm	3000K	20	10	8	9,6	120	840	●
40509.40.20.M	LEDstrip Tem-9,6W 4000K IP20 120/C80/8mm	4000K	20	10	8	9,6	120	840	●
40514.24.20.M	LEDstrip Tem-14,4W 2400K IP20 120/C80/8mm	2400K	20	10	8	14,4	120	1300	●
40514.27.20.M	LEDstrip Tem-14,4W 2700K IP20 120/C80/8mm	2700K	20	10	8	14,4	120	1300	●
40514.30.20.M	LEDstrip Tem-14,4W 3000K IP20 120/C80/8mm	3000K	20	10	8	14,4	120	1300	●
40514.40.20.M	LEDstrip Tem-14,4W 4000K IP20 120/C80/8mm	4000K	20	10	8	14,4	120	1300	●
40614.24.20.M	LEDstrip Tem-14,4W 2400K IP20 182/C90/8mm	2400K	20	33	8	14,4	182	1400	●
40614.27.20.M	LEDstrip Tem-14,4W 2700K IP20 182/C90/8mm	2700K	20	33	8	14,4	182	1400	●
40614.30.20.M	LEDstrip Tem-14,4W 3000K IP20 182/C90/8mm	3000K	20	33	8	14,4	182	1400	●
40614.40.20.M	LEDstrip Tem-14,4W 4000K IP20 182/C90/8mm	4000K	20	33	8	14,4	182	1400	●
40619.24.20.M	LEDstrip Tem-19,2W 2400K IP20 240/C90/10mm	2400K	20	25	10	19,2	240	2300	●
40619.27.20.M	LEDstrip Tem-19,2W 2700K IP20 240/C90/10mm	2700K	20	25	10	19,2	240	2300	●
40619.30.20.M	LEDstrip Tem-19,2W 3000K IP20 240/C90/10mm	3000K	20	25	10	19,2	240	2300	●
40619.40.20.M	LEDstrip Tem-19,2W 4000K IP20 240/C90/10mm	4000K	20	25	10	19,2	240	2300	●
40314.24.65.M	LEDstrip Nix-14,4W 2400K IP65	2400K	65		10	14,4	120	1000	●
40619.24.67.M	LEDstrip Tem-19,2W 2400K IP67 240/C90/10mm	2400K	67	25	12	19,2	240	2300	●
40619.27.67.M	LEDstrip Tem-19,2W 2700K IP67 240/C90/10mm	2700K	67	25	12	19,2	240	2300	●
40619.30.67.M	LEDstrip Tem-19,2W 3000K IP67 240/C90/10mm	3000K	67	25	12	19,2	240	2300	●
40619.40.67.M	LEDstrip Tem-19,2W 4000K IP67 240/C90/10mm	4000K	67	25	12	19,2	240	2300	●
40324.24.65.M	LEDstrip Nix-24W 2400K IP65	2400K	20		10	24	120	1800	●
40707.RGB.20.M	LEDstrip Cet- RGB 7,5W IP20 120/5mm	RGB	20	50	5	7,5	120	335	●
40712.RGB.20.M	LEDstrip Cet- RGB 12W IP20 60/10mm	RGB	20	100	10	12,0	60	370	●
40714.RGB.20.M	LEDstrip Cet- RGB 14W IP20 120/10mm	RGB	20	50	10	14,0	120	670	●
40717.RGBW.20.M	LEDstrip Cet- RGBW 17,4W IP20 60/12mm	RGBW	20	100	12	17,4	60	836	●
40719.RGBW.20.M	LEDstrip Cet- RGBW 19,2W IP20 240/12mm	RGBW	20	50	12	19,2	240	900	●
40712.RGB.67.M	LEDstrip Cet- RGB 12W IP67 60/12mm	RGB	67	100	12	12	60	320	●
40714.RGB.65.M	LEDstrip Cet- RGB 14W IP65 120/12mm	RGB	65	50	12	14	120	630	●
40717.RGBW.65.M	LEDstrip Cet- RGBW 17,4W IP65 60/14mm	RGBW	65	100	12	17	60	815	●

- Possible combination
- Possible but external connection between the wire and the LED strip



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



LEGIUS / EL CORTE INGLES