














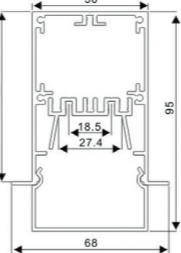





PROJECT: OCTAVIO MESTRE

VERSATILE S and R, with the FLAT and OUT diffuser, consists of 2 interchangeable models and diffusers for just one versatile concept, as its name indicates. Either recessed (R), surface mounted or suspended (S), with the same design and with only the variation of a tiny frame for the recessed one, they all equally adapt to 2 diffusers that achieve very different looks, that can be both discrete (FLAT) or much more visual (OUT). The VERSATILE system achieves functionality and at the same time is practical, easy to install, and can be part of many day-to-day projects.

			
		INDOOR	RECESSED
			
WIRELESS	ALEXA, SIRI, GOOGLE	DIMMABLE	CASAMBI
			
SPECIAL LED FOOD AND OTHERS	OTHER COLOUR TEMPERATURE	BIODYNAMIC	DIGITAL RGB
			
		RGB	

	Dimensions	Cut-out Size	Finish	Mounting
		w56xh105mm	<ul style="list-style-type: none"> <li><input type="radio"/> 10 White</li> <li><input type="radio"/> 20 Black</li> <li><input type="radio"/> 30 Aluminium</li> </ul>	 RECESSED
		w56xh105mm	<ul style="list-style-type: none"> <li><input type="radio"/> 10 White</li> <li><input type="radio"/> 20 Black</li> <li><input type="radio"/> 30 Aluminium</li> </ul>	 RECESSED

Versatile-r


454

GOOD NIGHT

High Output Profiles

GOOD NIGHT

Recessed

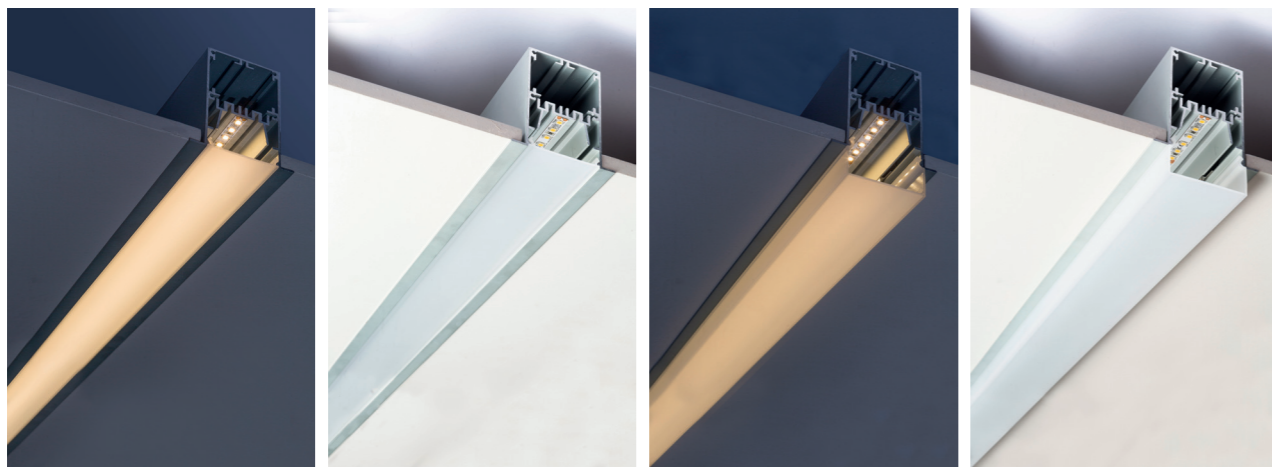


Versatile-r Flat

Versatile-r Out


1. Profile

Reference	Description	Mounting	Finish
454.00.10.M	Versatile-r	Recessed	○ 10 White
454.00.20.M			● 20 Black
454.00.30.M			● 30 Aluminium



2. Cover

Reference	Description
454.01.01.M	Flat opal diffuser
454.02.01.M	Out opal diffuser





3. LED & Driver

Reference	Wattage	Description	CCT	Light Distribution	Dimming
454	M14 14W/m	LED 350mA 2600 lm/m	27 2700K	6 Opal 120°	NDI ON/Off
	M21 21W/m	LED 500mA 3500 lm/m	30 3000K		DAL Dali
			40 4000K		PDI Push Dimm



Opal Down 120°



4. Endcap

Reference	Description	Type	Finish
454.11.10	Endcap (2 units)	Flat diffuser	○ 10 White
454.11.20	Endcap (2 units)	Flat diffuser	● 20 Black
454.11.30	Endcap (2 units)	Flat diffuser	● 30 Aluminium
454.12.10	Endcap (2 units)	Out diffuser	○ 10 White
454.12.20	Endcap (2 units)	Out diffuser	● 20 Black
454.12.30	Endcap (2 units)	Out diffuser	● 30 Aluminium



5. Mechanical Connections

Reference	Description
454.31	Linear connection (when longer than 2'5m)
454.32	90° connection
454.33.XXX	Custom connection



HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS



POLICLINICA COMARCAL EL VENDRELL