
453


High Output Profiles






VERSATILE S and R, with the FLAT and OUT diffuser, consists of 2 interchangeable models and diffusers for just one versatile concept, as its name indicates. Either recessed (R), surface mounted or suspended (S), with the same design and with only the variation of a tiny frame for the recessed one, they all equally adapt to 2 diffusers that achieve very different looks, that can be both discrete (FLAT) or much more visual (OUT). The VERSATILE system achieves functionality and at the same time is practical, easy to install, and can be part of many day-to-day projects.



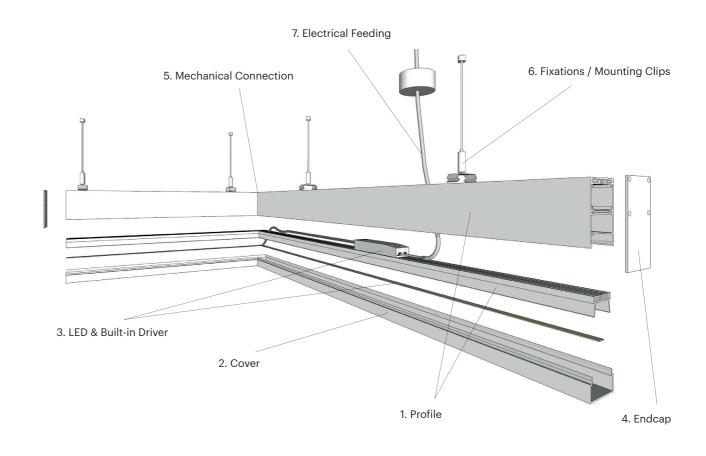

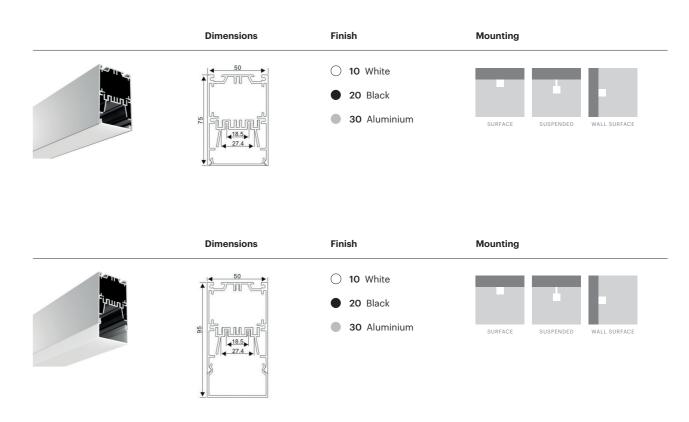

Versatile-s

GOOD NIGHT

Surface / Wall / Suspended

GOOD NIGHT

453

High Output Profiles









Versatile-s Flat

Versatile-s Out

1. Profile

Reference	Description	Mounting	Finish	
453.00.10.M	Versatile-s	Surface / Suspended	○ 10 White	لاعسرا لاعسرا
453.00.20.M			20 Black	
453.00.30.M			30 Aluminium	ַרְישיעין (יְישיעין (יִישיעין (יִישיעין (יִישיעין (יִישיעין (יִישיעין (יִישיעין (יִישיעין (יִישיעין (יִישיעין


2. Cover

Reference	Description	
453.01.01.M	Flat opal diffuser	inunë
453.02.01.M	Out opal diffuser	

3. LED & Driver

Reference	Wattag	je	Description	ССТ	Light Distribución	Dimming	j
453	M14 1	4W/m	LED 350mA 2600 lm/m	27 2700K	6 Opal 120°	NDI ON/	Off
	M21 2	1W/m	LED 500mA 3500 lm/m	30 3000K		DAL Dali	
				40 4000K		PDI Push	h Dimm









IMMOBILIARIA MGO / PROJECT: SANDRA SOLER STUDIO

324 www.goodnight-lighting.com 325

4. Endcap

Reference	Description	Туре	Finish	
453.11.10	Endcap (2 units)	Flat difusser	O 10 White	
453.11.20	Endcap (2 units)	Flat difusser	20 Black	
453.11.30	Endcap (2 units)	Flat difusser	30 Aluminium	• •
453.12.10	Endcap (2 units)	Out difusser	O 10 White	
453.12.20	Endcap (2 units)	Out difusser	20 Black	
453.12.30	Endcap (2 units)	Out difusser	30 Aluminium	

5. Mechanical Connections

Reference	Description
453.31	180° linear connection (when longer than 2'5m)
453.32	90° connection
453.33.XXX	Custom connection

6. Fixations / Mounting Kits

Reference	Description	
453.21	Surface clip (1 unit / 1'5m)	
453.22	Suspended kit (1 unit / 1,5m) (length 2m)	
453.25	Wall bracket (1 unit / 1′5m)	Man and a second

7. Electrical feeding & Internal Electrification

Reference	Description	Finish
453.42.10	Electrification for suspended mounting	O 10 White
453.42.20	Electrification for suspended mounting	● 20 Black
453.42.30	Electrification for suspended mounting	30 Aluminium
453.41	Electrification for surface mounting	



CLÍNICA DENTAL PONS / PROJECT: ESTUDI D'ARQUITECTURA INTERIOR MAITE PRATS

326 www.goodnight-lighting.com 327