

Sabrolumo
Trunking System

401

GOOD NIGHT

Smart System




GOOD NIGHT

Surface / Suspended



ELS GALONS / PROJECT: SANDRA SOLER STUDIO / PHOTO: JORDI PUIG PX77



Sabrolumo is a linear lighting system with endless combinations. With seamless, multilighting distribution and various bracket accessories, Sabrolumo offers a different lighting system option that allows you to illuminate anywhere you need. Up to 130 lm/W efficacy provides the lighting designer with a perfect lighting solution for many building-wide applications. With function of dimming 1-10V, DALI and emergency line, Sabrolumo is a truly intelligent lighting system.



1. Module

Sabrolumo codification	Model	Length mm	W	K	Light distribution	Dimm
Lens 75w 3000K 30°	44157	1437	25 - 75	30	2	D10
Lens 75w 3000K 60°	44157	1437	25 - 75	30	3	D10
Lens 75w 3000K 90°	44157	1437	25 - 75	30	4	D10
Lens 75w 3000K Asy Left	44157	1437	25 - 75	30	5L	D10
Lens 75w 3000K Asy Right	44157	1437	25 - 75	30	5R	D10
Lens 75w 3000K Asy Doble	44157	1437	25 - 75	30	5D	D10
Lens 75w 4000K 30°	44157	1437	25 - 75	40	2	D10
Lens 75w 4000K 60°	44157	1437	25 - 75	40	3	D10
Lens 75w 4000K 90°	44157	1437	25 - 75	40	4	D10
Lens 75w 4000K Asy Left	44157	1437	25 - 75	40	5L	D10
Lens 75w 4000K Asy Right	44157	1437	25 - 75	40	5R	D10
Lens 75w 4000K Asy Doble	44157	1437	25 - 75	40	5D	D10
Blank cover 1200mm	44927	1150				
Blank cover 1500mm	44957	1437				
Spotlight module	44980	1437 (track lenght: 650mm)				

Lumen output 160lm/W

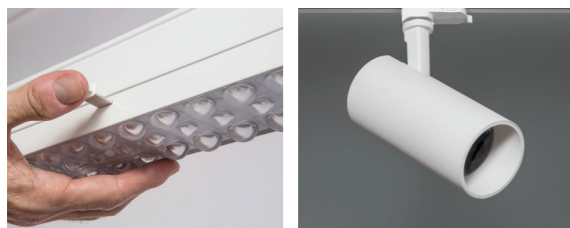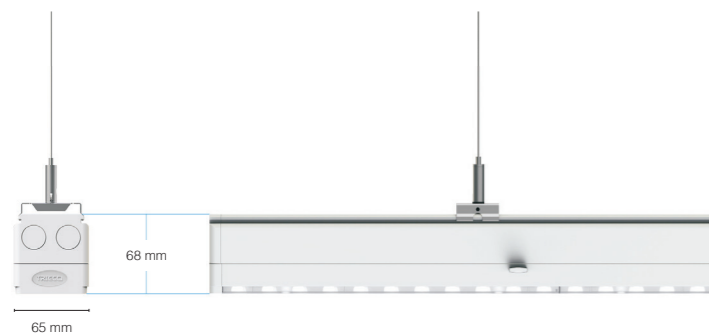

*PIR and daylight sensor available upon request
Emergency battery available upon request

2. Trunk




Sabrolumo codification	Model
Electrical module 1437mm	44012
Electrical module 2874mm	44015

3. Electrical Feeding


Sabrolumo codification	Model
Connection Wires 7x2,5mm ²	44901
Terminal feed with box 7x2,5mm ²	44911

4. Fixing

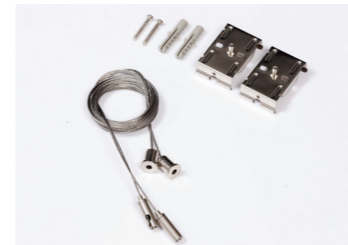

Sabrolumo codification	Model
Surface ceiling kit	44902
Steel Cable suspended Kit	44903
Chain suspended Kit	44904

5. Nodes & Endcaps

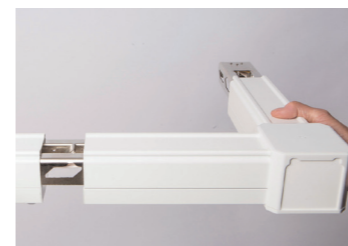

Sabrolumo codification	Model
"L" - L connection	44906
"T" - T connection	44907
"+" - X connection	44908
Endcaps 005	44920
Endcapbox 005s	44921

*Custom configuration available upon request