







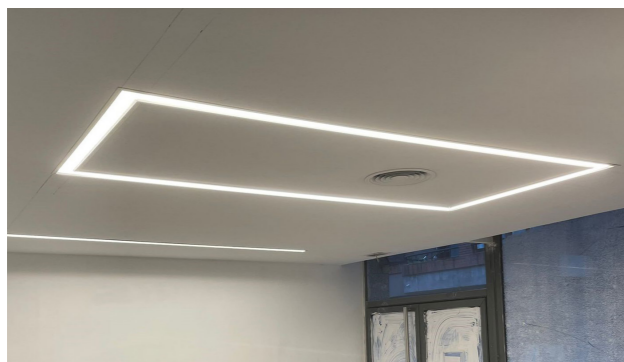





MITIS is a recessed system that achieves the softness and the visual comfort that we are rarely able to get with the usual models in the market. Its soft light, which can be warm or cool depending on our mood, gives us high quality light and at the same time, aesthetics that allow us to play around with interior design. With its different power settings plus its double light system, we can achieve effects that are both highly visual and able to give us the peace-and-quiet feeling that we so often look for.


 WIRELESS	 ALEXA, SIRI, GOOGLE	 DIMMABLE	 CASAMBI
 OTHER COLOUR TEMPERATURE	 BIODYNAMIC	 DIGITAL RGB	 RGB



Dimensions	Cut-out Size	Finish	Mounting
 	w90xh70mm	<ul style="list-style-type: none"> <li><input type="radio"/> 10 White</li> <li><input type="radio"/> 30 Aluminium</li> </ul>	 RECESSED

1. Profile

Reference	Description	Mounting	Finish
451.00.10.M	Mitis	Recessed	○ 10 White
451.00.30.M			● 30 Aluminium



2. Cover

Internal diffuser included.

3. LED Strip

It is necessary to include two LED Strip. For example, 2m profile requires 4m of LED Strip

Reference	Description	K	IP	LED Pitch	width	Wattage	Density	Flux	Mitis
40806.27.20.M	LEDstrip teM 4,8W 2700K IP20 60/C90/4mm	● 2700K	20	50	4	4,8	60	450	●
40806.30.20.M	LEDstrip teM 4,8W 3000K IP20 60/C90/4mm	● 3000K	20	50	4	4,8	60	450	●
40806.40.20.M	LEDstrip teM 4,8W 4000K IP20 60/C90/4mm	● 4000K	20	50	4	4,8	60	450	●
40509.22.20.M	LEDstrip Tem-9,6W 2200K IP20 120/C80/8mm	● 2200K	20	10	8	9,6	120	840	●
40509.27.20.M	LEDstrip Tem-9,6W 2700K IP20 120/C80/8mm	● 2700K	20	10	8	9,6	120	840	●
40509.30.20.M	LEDstrip Tem-9,6W 3000K IP20 120/C80/8mm	● 3000K	20	10	8	9,6	120	840	●
40509.40.20.M	LEDstrip Tem-9,6W 4000K IP20 120/C80/8mm	● 4000K	20	10	8	9,6	120	840	●
40514.24.20.M	LEDstrip Tem-14,4W 2400K IP20 120/C80/8mm	● 2400K	20	10	8	14,4	120	1300	●
40514.27.20.M	LEDstrip Tem-14,4W 2700K IP20 120/C80/8mm	● 2700K	20	10	8	14,4	120	1300	●
40514.30.20.M	LEDstrip Tem-14,4W 3000K IP20 120/C80/8mm	● 3000K	20	10	8	14,4	120	1300	●
40514.40.20.M	LEDstrip Tem-14,4W 4000K IP20 120/C80/8mm	● 4000K	20	10	8	14,4	120	1300	●
40614.24.20.M	LEDstrip Tem-14,4W 2400K IP20 182/C90/8mm	● 2400K	20	33	8	14,4	182	1400	●
40614.27.20.M	LEDstrip Tem-14,4W 2700K IP20 182/C90/8mm	● 2700K	20	33	8	14,4	182	1400	●
40614.30.20.M	LEDstrip Tem-14,4W 3000K IP20 182/C90/8mm	● 3000K	20	33	8	14,4	182	1400	●
40614.40.20.M	LEDstrip Tem-14,4W 4000K IP20 182/C90/8mm	● 4000K	20	33	8	14,4	182	1400	●
40619.24.20.M	LEDstrip Tem-19,2W 2400K IP20 240/C90/10mm	● 2400K	20	25	10	19,2	240	2300	●
40619.27.20.M	LEDstrip Tem-19,2W 2700K IP20 240/C90/10mm	● 2700K	20	25	10	19,2	240	2300	●
40619.30.20.M	LEDstrip Tem-19,2W 3000K IP20 240/C90/10mm	● 3000K	20	25	10	19,2	240	2300	●
40619.40.20.M	LEDstrip Tem-19,2W 4000K IP20 240/C90/10mm	● 4000K	20	25	10	19,2	240	2300	●
40314.24.65.M	LEDstrip Nix-14,4W 2400K IP65	● 2400K	65		10	14,4	120	1000	●
40619.24.67.M	LEDstrip Tem-19,2W 2400K IP67 240/C90/10mm	● 2400K	67	25	12	19,2	240	2300	●
40619.27.67.M	LEDstrip Tem-19,2W 2700K IP67 240/C90/10mm	● 2700K	67	25	12	19,2	240	2300	●
40619.30.67.M	LEDstrip Tem-19,2W 3000K IP67 240/C90/10mm	● 3000K	67	25	12	19,2	240	2300	●
40619.40.67.M	LEDstrip Tem-19,2W 4000K IP67 240/C90/10mm	● 4000K	67	25	12	19,2	240	2300	●
40324.24.65.M	LEDstrip Nix-24W 2400K IP65	● 2400K	65		10	24	120	1800	●
40707.RGB.20.M	LEDstrip Cet- RGB 7,5W IP20 120/5mm	● RGB	20	50	5	7,5	120	335	●
40712.RGB.20.M	LEDstrip Cet- RGB 12W IP20 60/10mm	● RGB	20	100	10	12,0	60	370	●
40714.RGB.20.M	LEDstrip Cet- RGB 14W IP20 120/10mm	● RGB	20	50	10	14,0	120	670	●
40717.RGBW.20.M	LEDstrip Cet- RGBW 17,4W IP20 60/12mm	● RGBW	20	100	12	17,4	60	836	●
40719.RGBW.20.M	LEDstrip Cet- RGBW 19,2W IP20 240/12mm	● RGBW	20	50	12	19,2	240	900	●
40712.RGB.67.M	LEDstrip Cet- RGB 12W IP67 60/12mm	● RGB	67	100	12	12	60	320	●
40714.RGB.65.M	LEDstrip Cet- RGB 14W IP65 120/12mm	● RGB	65	50	12	14	120	630	●
40717.RGBW.65.M	LEDstrip Cet- RGBW 17,4W IP65 60/14mm	● RGBW	65	100	12	17	60	815	●

- Possible combination
- Possible but external connection between the wire and the LED strip

4. Endcap

Reference	Description	Finish
451.11.10	Endcap (2 units)	○ 10 White
451.11.30	Endcap (2 units)	● 30 Aluminium




5. Mechanical Connections

Reference	Description
451.31	180° linear connection (when longer than 2'5m)
451.32	90° connection
451.33.XXX	Custom connection

6. Fixations / Mounting Kits

Reference	Description
451.23	Recessed bracket (1 unit / 1'5m)



7. Electrical Feeding & Internal Electrification

Reference	Description
451.43	Electrification for recessed mounting

8. Driver

See drivers section