


1. Profile

Reference	Description	Mounting	Finish
430.00.10.M	Supellex profile white with difusser	Recessed / Surface	○ 10 White
430.00.20.M	Supellex profile black with difusser	Recessed / Surface	● 20 Black
430.00.30.M	Supellex profile alum with difusser	Recessed / Surface	● 30 Aluminium
430.11.01	Supellex endcap plastic (2 units)	Recessed / Surface	
430.21	Supellex fixation clip (2 pieces)	Recessed / Surface	

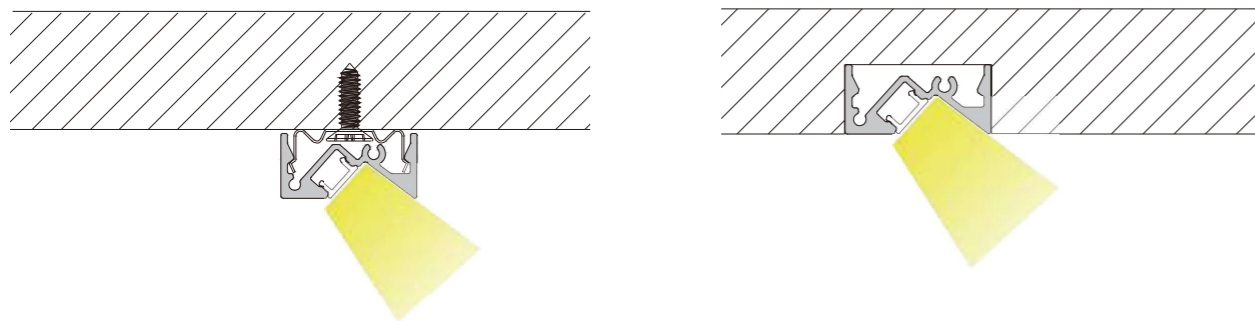

3. LED Strip

Reference	Description	K	IP	LED Pitch	width	Wattage	Density	Flux	Supellex
40806.27.20.M	LEDstrip teM 4,8W 2700K IP20 60/C90/4mm	● 2700K	20	50	4	4,8	60	450	●
40806.30.20.M	LEDstrip teM 4,8W 3000K IP20 60/C90/4mm	● 3000K	20	50	4	4,8	60	450	●
40806.40.20.M	LEDstrip teM 4,8W 4000K IP20 60/C90/4mm	● 4000K	20	50	4	4,8	60	450	●
40810.27.20.M	LEDstrip teM 9,6W 2700K IP20 60/C90/4mm	● 2700K	20	50	4	9,6	120	840	●
40810.30.20.M	LEDstrip teM 9,6W 3000K IP20 60/C90/4mm	● 3000K	20	50	4	9,6	120	840	●
40810.40.20.M	LEDstrip teM 9,6W 4000K IP20 60/C90/4mm	● 4000K	20	50	4	9,6	120	840	●
40707.RGB.20.M	LEDstrip Cet- RGB 7,5W IP20 120/5mm	● RGB	20	50	5	7,5	120	335	●

● Possible combination


4. Endcap

Reference	Description	
430.11	Endcap (2 units)	

5. Fixation Clip

Reference	Description	
430.21	Mounting clip (metal)	

6. Driver See drivers section

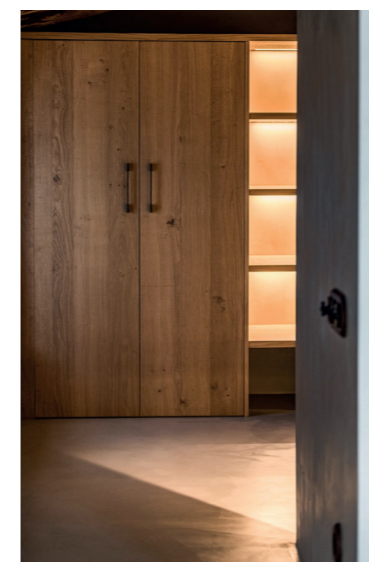

PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCE GOST PHOTO



NUADTHAI SPA