


# GOOD NIGHT

Lighting Special Products

Indoor / Outdoor products

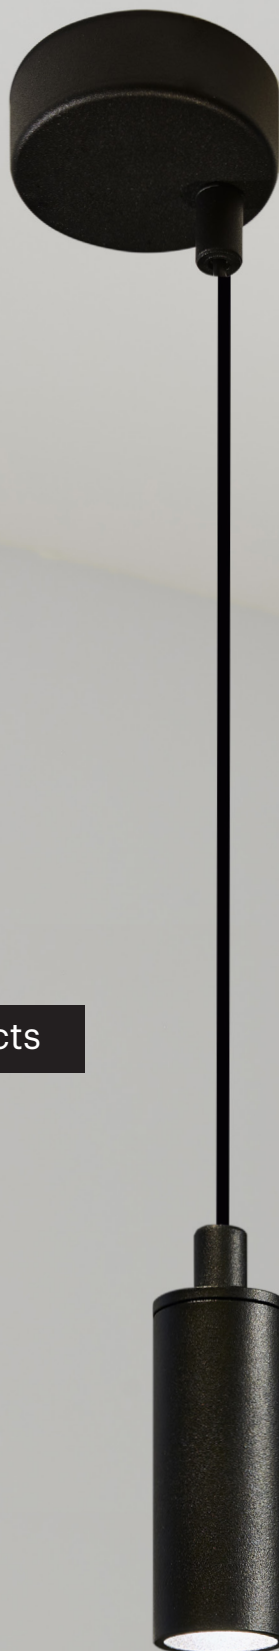

# GOOD NIGHT Lighting Special Products

## **Indoor Products**

Recessed  
Suspended  
Surface  
Track

## **Outdoor Products**

Recessed  
Surface / Suspended

Product  
Elements of the page

Product  
name

Balnearis  
10007

GOOD NIGHT  
Recessed

Image



Technical  
information

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø75 h80mm
<b>Wattage</b>	12W	<b>Dimensions</b>	Ø85 h70mm
<b>Lumen Output</b>	900	<b>Adjustable</b>	No
<b>Connection</b>	300mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		



1000712,\*\*.5,10

Product  
reference

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10007	12	27 2700 30 3000	5 Asymetric 50°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request

Symbols

Range of uses

- Indoor
- Outdoor
- Ceiling Recessed
- Wall Recessed
- Surface
- Suspended
- Track
- Spike
- Ground recessed
- Wall surface

Light distribution

- 1 Narrow
- 2 Medium
- 3 Wide
- 4 Superwide
- 5 Asymetric
- 5D Double asymetric
- 5L Asymetric left
- 5R Asymetric right
- 6 Opal
- 7A 50°x50°
- 7B 70°x70°
- 8 Elyptical
- 9 Zoom

Reference composition

GOOD NIGHT

10001.\*\*.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish
10001	11	27 2700	1 Narrow 20°	10 White
	15	30 3000	2 Medium 40°	20 Black
			4 Superwide 60°	

10001.11.27.4.10

10501.GU10.XX.X.90

Number	W	Colour Temperature	Light Distribution	Finish
10501	GU10	XX	X	90 Gypsum

10501.GU10.XX.X.90

Finishings

- 10 White
- ⊙ 11 White & White
- ◐ 12 White & Black
- ◑ 14 White & Gold
- 17 White & Chrome
- ◐ 18 White & Copper
- 20 Black
- ⦿ 21 Black & White
- ⦿ 22 Black & Black
- ◐ 24 Black & Gold
- 26 Black & Dark Grey
- 30 Aluminium
- ◐ 32 Aluminium & Black
- 40 Gold
- 60 Dark Grey
- ⦿ 66 Dark Grey & Dark Grey
- 70 Chrome
- 80 Inox
- 90 Gypsum

Control

- 📶 Wireless
- 📱 Alexa, Siri, Google
- 📢 Casambi
- 🔌 Dimmable

Special LED

- 🌈 Other colour temperatures
- 🍴 Special LED food and others
- 🌙 Biodynamic
- 🌈 Digital RGB
- 🌈 RGB

Indoor Index

Recessed



Perduo Trimless  
page 16



Ipsofacto-a HE  
page 18



Ipsofacto-a T 230  
page 22



Ipsofacto-a Low  
230 page 24



Ipsofacto-a  
GU10 page 25



Ipsofacto-a 95  
HE page 26



Ipsofacto-a 95  
T230 page 28



Ipsofacto-a 95  
Low 230 page 30



Ipsofacto-a 95  
GU10 page 31



Ipsofacto-ip  
page 32



Ipsofacto-ip  
82 HE page 34



Curriculum-f  
90 HE page 36




Curriculum-f 90 T  
230 page 38



Curriculum-f 90  
Low 230 page 40




Curriculum-f 90  
GU10 page 42



Curriculum-a  
page 44




Suffixus HE  
page 46




Suffixus T 230  
page 48



Suffixus Low  
230 page 50



Suffixus GU10  
page 52




Marcus HE  
page 54




Marcus T 230  
page 56




Marcus Low  
230 page 58




Marcus GU10  
page 60




Obliquo HE  
page 62



Obliquo T 230  
page 63




Obliquo Low 230  
page 64




Obliquo GU10  
page 65




Pendo HE  
page 66



Pendo T 230  
page 67



Pendo Low 230  
page 68



Pendo GU10  
page 69



Balnearis  
page 70




Mini-ipsfatto  
page 72



Minicurriculum-f  
page 74

Indoor Index

Recessed



Minicurriculum-a  
page 75



Deminutus  
page 76



Nolitus  
page 77




Parvus R  
page 78




Parvus Q  
page 79



Mini Parvus  
page 80



Mini Parvus  
Wood page 81




Honoris  
page 82



Honestus R HE  
page 83



Honestus Q HE  
page 84




Honestus Q2  
HE page 85



Cicada HE  
page 86




Cicada GU10  
page 88



Quadratum-01  
Trimless  
page 92



Quadratum-02  
Trimless  
page 93




Quadratum-11  
page 92



Quadratum-12  
page 93



Quadratum-03  
Trimless  
page 94



Quadratum-13  
page 94



Compactus-1  
page 96




Compactus-2  
page 97



Compactus-5  
page 98



Compactus-Asy  
page 99



Celum 1  
page 100



Celum 3  
page 101



Celum 5  
page 102



Celum 5A  
page 103



Celum 10  
page 104



Incognit GU10  
page 106



Lenis GU10  
page 108



Big Lenis  
page 110



Arus  
page 112



Big Ipsofacto f  
page 113



Superavit  
page 114



Big Curriculum  
page 116

Indoor Index

Recessed




**New**  
Mergo  
page 117



**New**  
Lacunar Trimless  
page 118




Rotundus-UGR<19  
page 119



Savanna 60x60 UGR<19  
page 120



Savanna 60x60 Opal  
page 121




Savanna 120x30 Opal  
page 122



Mini Eclipsim  
page 123



Praetorium  
page 124



**New**  
Lacrima  
page 125




Tellus  
page 126



**New**  
Scala  
page 127




**New**  
Oculus  
page 128




**New**  
Signum  
page 129


Suspended



**New**  
Pictus Cylinder Suspended  
page 132



**New**  
Fluctus 130 Cylinder Surface  
page 133



**New**  
Fluctus 170 Cylinder Surface  
page 134



**New**  
Fluctus 130 Cylinder Suspended  
page 135



**New**  
Fluctus 170 Cylinder Suspended  
page 136



Aqualis-65  
page 138



Aqualis-85  
page 139



**New**  
Audere Cylinder Surface  
page 140



**New**  
Audere Cylinder Suspended  
page 141



**New**  
Canalis T230 Surface  
page 142



**New**  
Canalis GU10 Surface  
page 143




**New**  
Canalis T230 Suspended  
page 144




**New**  
Canalis GU10 Suspended  
page 145



Speculum  
page 146




Buto 35  
page 148




**New**  
Lunis  
page 150




**New**  
Lunis Twin  
page 152



**New**  
Bitubus 100 Surface  
page 154




**New**  
Bitubus 100 Suspended  
page 156



**New**  
QX  
page 157

Indoor Index

Surface



Linestrum 30.1  
page 158




Linestrum 30.2  
page 160



Linestrum 50.1  
page 161



Linestrum 50.2  
page 162



Linestrum 100.2  
page 163



Porcellanatum  
Basic page 164



Porcellanatum  
Basic Switch  
page 165




Purus  
page 166

Surface / Recessed



Pictus Base  
Surface  
page 170



Pictus Base  
Recessed  
page 171



Fluctus 130 Base  
Surface  
page 172



Fluctus 170 Base  
Surface page 174




Furtivus-Zoom  
Surface  
page 175



Fluctus 130 Base  
Recessed  
page 176



Audere Base  
Surface  
page 178



Audere Base  
Recessed  
page 179



Museum Plus  
Base Surface  
page 180



Museum Plus  
Base Recessed  
page 182



Indoor Index

Track



**New**  
Pictus Track  
page 184



**New**  
Fluctus 130Track  
page 186



**New**  
Fluctus 170 Track  
GU10 page 188



Furtivus-Zoom  
Track page 190



**New**  
Audere Track  
page 191



Museum Plus  
Track page 194




Ars  
page 198



Elongatus Track  
page 199



**New**  
Sabrolumo Track  
L600 page 200



**New**  
Sabrolumo Track  
L1200 page 202



**New**  
Sabrolumo Track  
L1500 page 203



**New**  
Sabrolumo UGR  
Track L600  
page 204



**New**  
Sabrolumo UGR  
Track L1200  
page 205




**New**  
Sabrolumo UGR  
Track L1500  
page 206



Tracks  
page 208

Outdoor Index


Recessed



Caminus-s  
page 212




Caminus-r  
page 214




Caminus-l  
page 216



Moenia  
page 218



Oculus  
page 220



Signum  
page 221


Surface / Suspended



Lanterna Battery  
page 222




Big Lanterna  
Battery  
page 223



Lucerna 34  
230V page 224



Lucerna 50  
230V page 225



Lucerna Wall  
230V page 226



Simetrix  
page 227




ERRE2  
page 228



Vallum Big  
page 230




Vallum Small  
page 231



Bacilis R  
page 232




Bacilis Q  
page 233



Big Bacilis R  
page 234



Big Bacilis Q  
page 235




QX  
page 236



Duplex  
page 238




Demissus R  
page 240




Demissus Q  
page 241



Deorsum  
page 242




Laminus Small  
page 243




Laminus Big  
page 244



Fenestra  
page 245



Magicae-ip  
page 246



Ludice  
page 247



Unguis  
page 248



Big Unguis  
page 249



Viceversa-2  
page 250



Tunnel  
page 251

Indoor products



Recessed

## Recessed

16	Perduo Trimless	101	Celum 3
18	Ipsofacto-a HE	102	Celum 5
22	Ipsofacto-a T 230	103	Celum 5A
24	Ipsofacto-a Low 230	104	Celum 10
25	Ipsofacto-a GU10	106	Incognit GU10
26	Ipsofacto-a 95 HE	108	Lenis GU10
28	Ipsofacto-a 95 T230	110	Big Lenis
30	Ipsofacto-a 95 Low 230	112	Arus GU10
31	Ipsofacto-a 95 GU10	113	Big Ipsofacto f
32	Ipsofacto-IP	114	Superavit
34	Ipsofacto-IP 82 HE	116	Big Curriculum
36	Curriculum-F 90 HE	117	Mergo
38	Curriculum-F-90 T 230	118	Lacunar Trimless
40	Curriculum-F-90 Low 230	119	Rotundus-UGR<19
42	Curriculum-F-90 GU10	120	Savanna 60x60 UGR<19
44	Curriculum-a	121	Savanna 60x60 Opal
46	Suffixus HE	122	Savanna 120x30 Opal
48	Suffixus T 230	123	Mini Eclipsim
50	Suffixus Low 230	124	Praetorium
52	Suffixus GU10	125	Lacrima
54	Marcus HE	126	Tellus
56	Marcus T 230	127	Scala
58	Marcus Low 230	128	Oculus
60	Marcus GU10	129	Signum
62	Obliquo HE		
63	Obliquo T230		
64	Obliquo Low 230		
65	Obliquo GU10		
66	Pendo HE		
67	Pendo T 230		
68	Pendo Low 230		
69	Pendo GU10		
70	Balnearis		
72	Mini-ipsfacto		
74	Minicurriculum f		
75	Minicurriculum a		
76	Deminutus		
77	Nolitus		
78	Parvus R		
79	Parvus Q		
80	Mini Parvus		
81	Mini Parvus Wood		
82	Honoris		
83	Honestus R HE		
84	Honestus Q HE		
85	Honestus Q2 HE		
86	Cicada HE		
88	Cicada GU10		
92	Quadratum-01 Trimless		
93	Quadratum-02 Trimless		
92	Quadratum-11		
93	Quadratum-12		
94	Quadratum-03 Trimless		
94	Quadratum-13		
96	Compactus-1		
97	Compactus-2		
98	Compactus-5		
99	Compactus-Asy		
100	Celum 1		



MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA



# Perduo Trimless

10092

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	2*9W
<b>Lumen Output</b>	596
<b>Connection</b>	700mA
<b>Driver</b>	Included remote
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)


<b>CRI</b>	>90
<b>Life Time</b>	40.000 h
<b>Cut-out Size</b>	Ø125 h113 mm
<b>Dimensions</b>	Ø123,6 h112,2 mm
<b>Adjustable</b>	+/- 20°

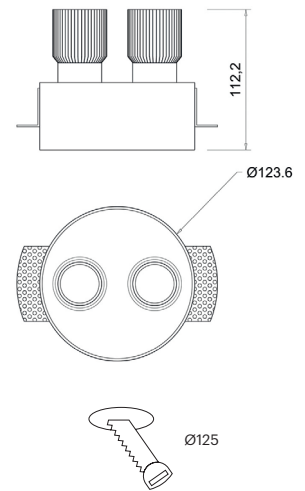

10092.18.271.20

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10092	18	27 2700	1 Narrow 18°	● 20 Black	NDI* Driver included (non-dimmable) Dimmable driver upon request



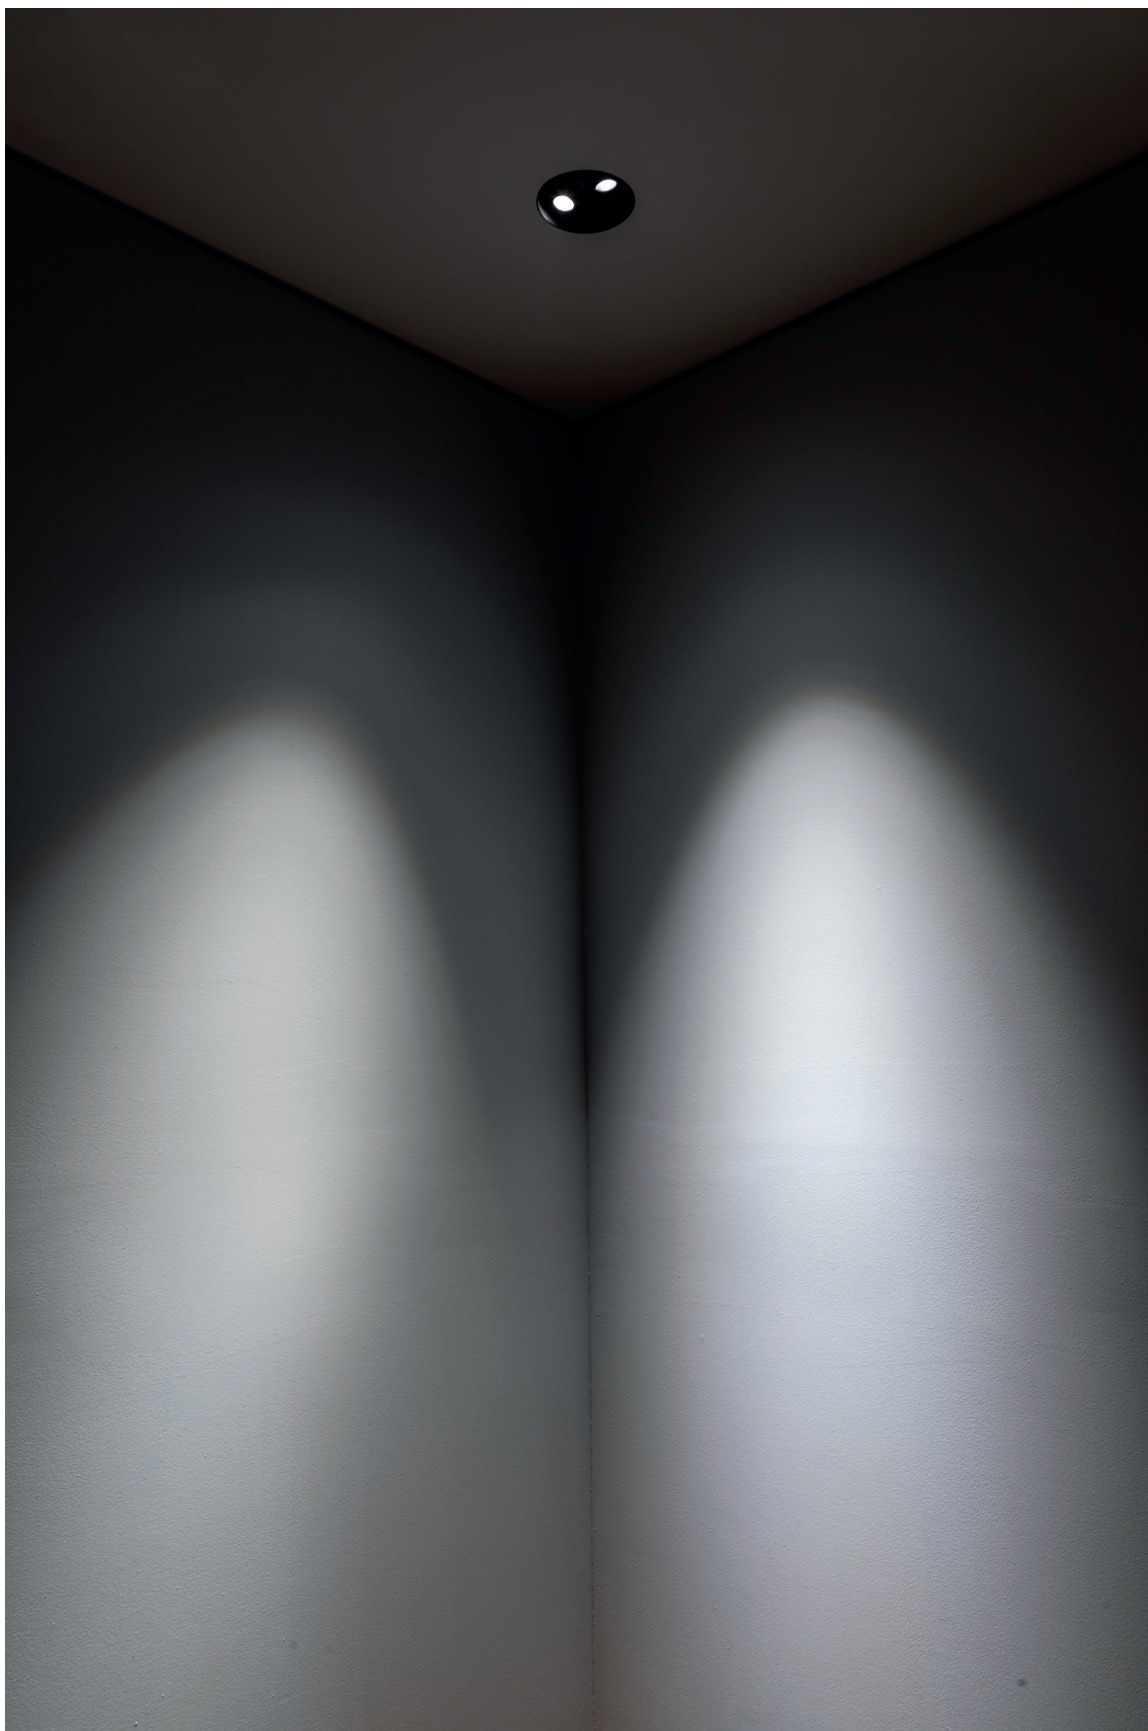

# Ipsufacto-a HE

10001

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE


DIMMABLE

CASAMBI


WIRELESS




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>90	 <span>Ø76</span>
<b>Life Time</b>	L80/B10 >55.000 h	
<b>Cut-out Size</b>	Ø76 mm	
<b>Adjustable</b>	Yes	





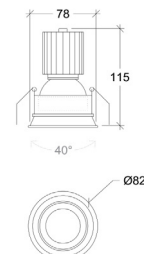


<b>Wattage</b>	5W
<b>Lumen Output</b>	750
<b>Connection</b>	150mA
<b>Dimensions</b>	Ø82 h88mm
<b>Cut-out Size</b>	Ø76 h98mm




<b>Wattage</b>	8,6W
<b>Lumen Output</b>	1200
<b>Connection</b>	250mA
<b>Dimensions</b>	Ø82 h115mm
<b>Cut-out Size</b>	Ø76 h120mm




10001.\*.\*\*.\*.\*\*.XXX


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	5	27 2700	 1 Narrow 15°	 10 White	XXX Driver not included (See drivers section)
	9	30 3000	 2 Medium 25°	 20 Black	
		40 4000	 3 Wide 39°	 40 Gold	
			 4 Superwide 61°		

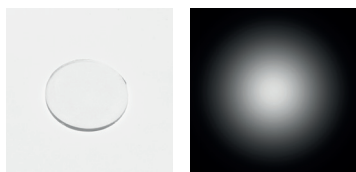

10001.A.20.99 Spread lens

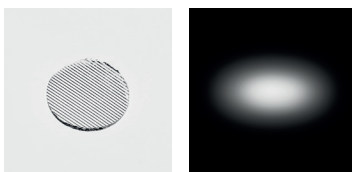



10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

10001.A.11.10 Square frame-1  
10001.A.12.10 Square frame-2

○ White

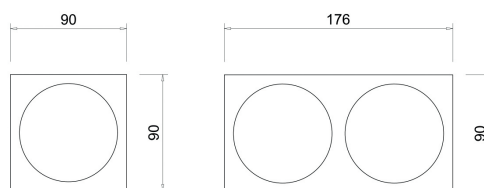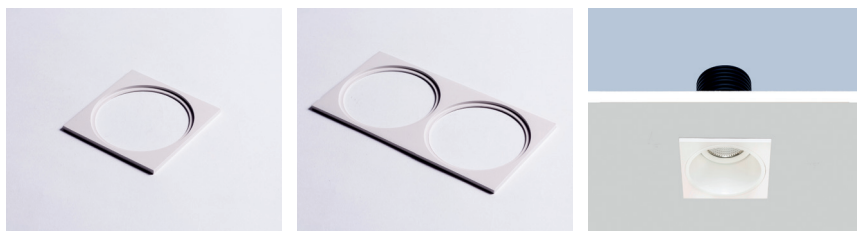

Other finishes upon request



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



PROJECT: OCTAVIO MESTRE ARQUITECTOS

# Ipsufacto-a T230



GOOD NIGHT

10001

Recessed




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10>25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø76 h127mm
<b>Wattage</b>	10W	<b>Dimensions</b>	Ø82 h117mm
<b>Lumen Output</b>	760	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		




10001.10.\*\*.\*\*\*.DTR


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	10	27 2700	1 Narrow 12°	○ 10 White	DTR Phase dim
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 40 Gold	

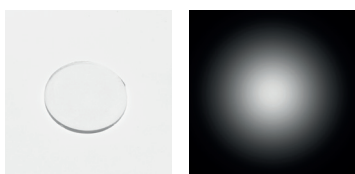

10001.A.20.99 Spread lens



10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



Other finishes upon request

# Ipsufacto-a LOW 230

10001

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI





WIRELESS



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	7W
<b>Lumen Output</b>	500
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>80
<b>Life Time</b>	L70/B10>20.000 h
<b>Cut-out Size</b>	Ø76 h65mm
<b>Dimensions</b>	Ø82 h53mm
<b>Adjustable</b>	Yes



10001.7.\*\*.3.\*\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	7	27 2700	3 Wide 38°	10 White	DTR Phase dim
		30 3000		20 Black	
		40 4000		40 Gold	



PROJECT: OCTAVIO MESTRE ARQUITECTOS



# Ipsosfacto-a GU10

GOOD NIGHT

10001

Recessed



INDOOR RECESSED




ALEXA, SIRI GOOGLE DIMMABLE CASAMBI WIRELESS



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø76 h125mm
<b>Dimensions</b>	Ø82 h120mm
<b>Adjustable</b>	Yes

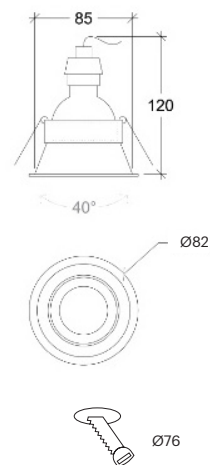

10001.GU10.XX.X.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10001	GU10	XX Depending on lamp	XX Depending on lamp	<input type="radio"/> 10 White <input type="radio"/> 20 Black <input type="radio"/> 40 Gold	Depending on lamp



Other finishes upon request

10001.A.11.10 Square frame-1  
10001.A.12.10 Square frame-2

White



# Ipsufacto-a 95 HE

10008

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI




WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø85 mm
<b>Driver</b>	Not included	<b>Dimensions</b>	Ø95 mm
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)	<b>Adjustable</b>	Yes




Ø85

<b>Wattage</b>	5W	<b>Wattage</b>	8,6W
<b>Lumen Output</b>	750	<b>Lumen Output</b>	1200
<b>Connection</b>	150mA	<b>Connection</b>	250mA
<b>Dimensions</b>	Ø95 h99mm	<b>Dimensions</b>	Ø95 h126mm
<b>Cut-out Size</b>	Ø85 h109mm	<b>Cut-out Size</b>	Ø85 h136mm

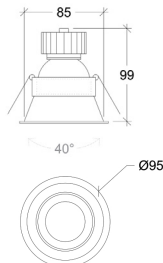


Ø95

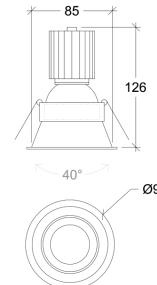


Ø95

10008.\*.\*\*.\*.\*\*.XXX


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°		
		4 Superwide 61°			

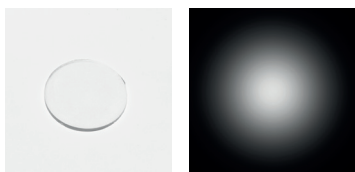


10001.A.20.99 Spread lens



10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

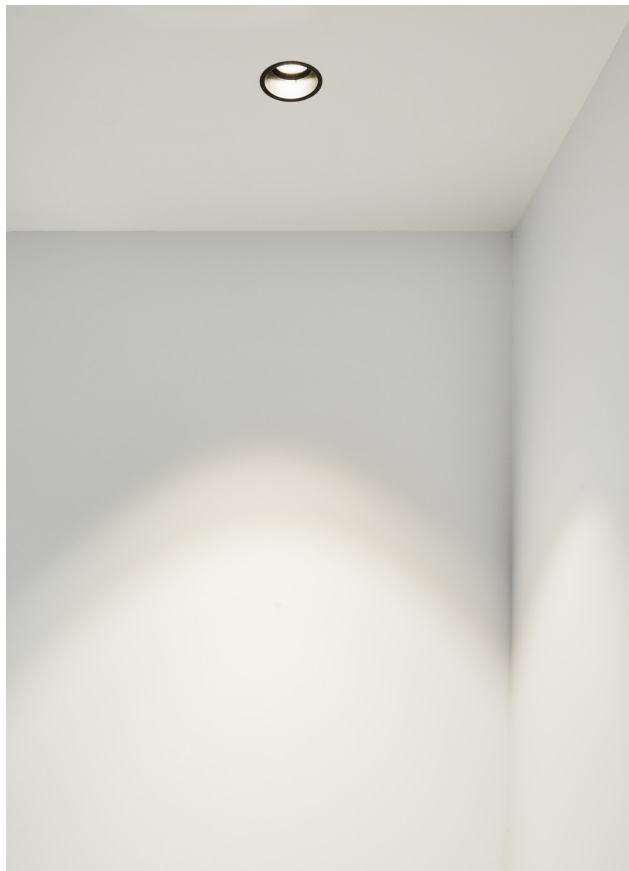

# Ipsufacto-a 95 T230

10008

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI




WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10>25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø85 h145mm
<b>Wattage</b>	10W	<b>Dimensions</b>	Ø95 h128mm
<b>Lumen Output</b>	760	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		

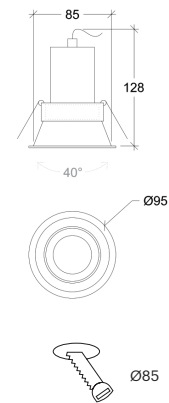


10008.10.\*\*.\*\*\*.DTR


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	10	27 2700	1 Narrow 12°	<input type="radio"/> 10 White	DTR Phase dim
		30 3000	2 Medium 24°	<input checked="" type="radio"/> 20 Black	
		40 4000	3 Wide 36°		



10001.A.20.99 Spread lens



10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA

Ipsofacto-a 95 LOW 230V

10008

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI




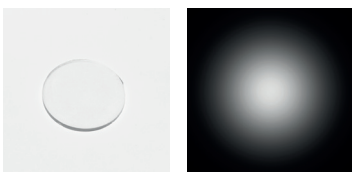
WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L70/B10>20.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø85 h72mm
<b>Wattage</b>	7W	<b>Dimensions</b>	Ø95 h64mm
<b>Lumen Output</b>	500	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		




10008.7.\*\*.3.\*\*.DTR.DTR


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	7	27 2700	 3 Wide 36°	<input type="radio"/> 10 White	DTR Phase dim
		30 3000		<input checked="" type="radio"/> 20 Black	
		40 4000			



10001.A.20.99 Spread lens

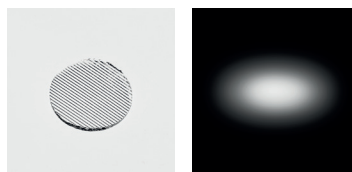

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre

# Ipsufacto-a 95 GU10

10008

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø85 h125mm
<b>Dimensions</b>	Ø95 h120mm
<b>Adjustable</b>	Yes

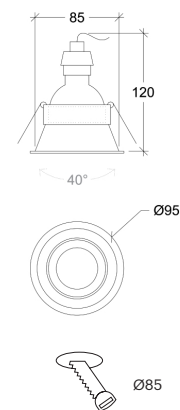


10008.GU10.XX.XX.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10008	GU10	XX Depending on lamp	XX Depending on lamp	<input type="radio"/> 10 White <input type="radio"/> 20 Black	Depending on lamp

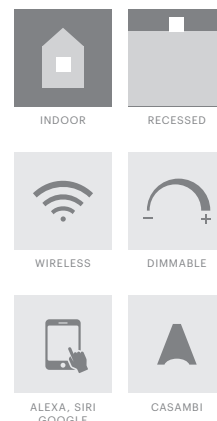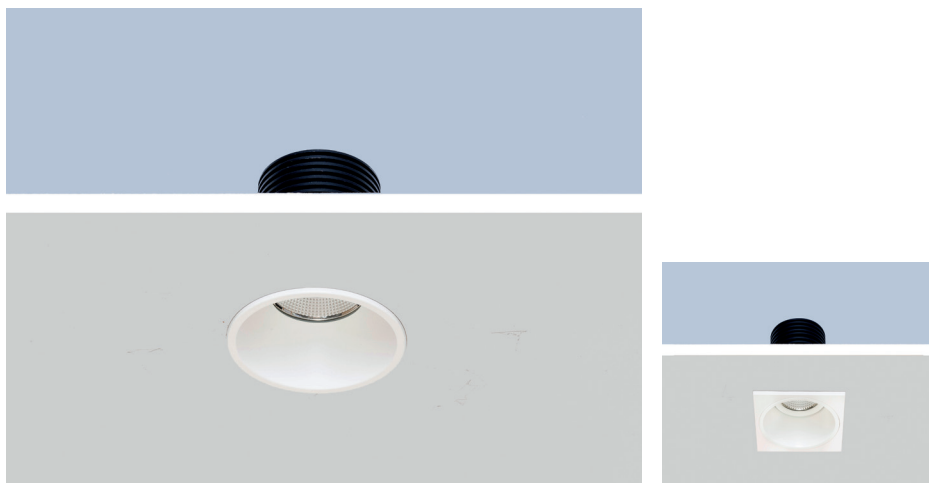


<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	35.000 h
<b>IP</b>	65	<b>Cut-out Size</b>	Ø76 h112mm
<b>Wattage</b>	11W 15W	<b>Dimensions</b>	Ø82 h102mm
<b>Lumen Output</b>	820 1200	<b>Adjustable</b>	No
<b>Connection</b>	500mA / 350mA		
<b>Driver</b>	Included remote 8-24V (500mA) 20-39V (350mA)		
<b>Dimmable*</b>	Included remote ON/OFF, DALI, PUSH (See drivers section)		

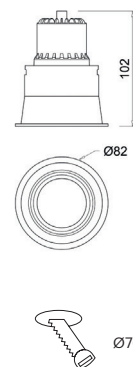



70002.\*\*.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70002	11	27 2700	1 Narrow 20°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	15	30 3000	2 Medium 40°	● 20 Black	
			4 Superwide 60°		



10001.A.11.10 Square frame-1

○ White

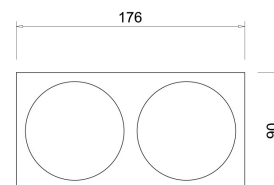

10001.A.12.10 Square frame-2

○ White





YERSE



PROJECT: OCTAVIO MESTRE ARQUITECTOS

# Ipsufacto-IP 82 HE

70002

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI





WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	44	<b>Cut-out Size</b>	Ø82 mm
<b>Driver</b>	Not included	<b>Adjustable</b>	Yes
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)		



<b>Wattage</b>	5W	<b>Wattage</b>	8,6W
<b>Lumen Output</b>	750	<b>Lumen Output</b>	1200
<b>Connection</b>	150mA	<b>Connection</b>	250mA
<b>Dimensions</b>	Ø82 h88mm	<b>Dimensions</b>	Ø82 h115mm
<b>Cut-out size</b>	Ø78 h105mm	<b>Cut-out size</b>	Ø78 h125mm

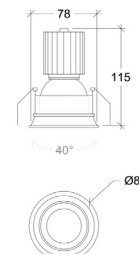

70002.\*.\*\*.\*.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70002	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°	● 40 Gold	
		4 Superwide 61°			



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Curriculum-f 90 HE

10043

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI



WIRELESS



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)

CRI	>90
Life Time	L80/B10 >55.000 h
Cut-out Size	Ø80 mm
Adjustable	Yes





Ø80

Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø90 h84mm
Cut-out size	Ø80 h94mm



Ø90


Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø90 h111mm
Cut-out size	Ø80 h121mm




Ø90

10043.\*.\*\*.\*.\*\*.XXX


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°		
		40 4000	3 Wide 39°		
			4 Superwide 61°		

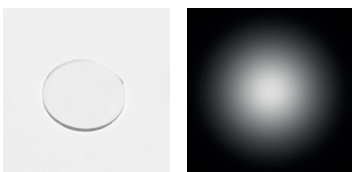

10001.A.20.99 Spread lens

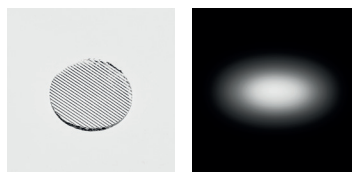

10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



PROJECT: ESTUDI ARQUITECTURA INTERIOR MAITE PRATS / PHOTO: MARC TORRA

# Curriculum-f 90 T230

10043

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS


<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	10W
<b>Lumen Output</b>	760
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10>25.000 h
<b>Cut-out Size</b>	Ø80 h130mm
<b>Dimensions</b>	Ø90 h112mm
<b>Adjustable</b>	No

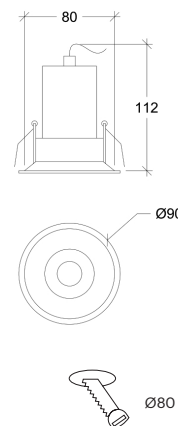


10043.10.\*\*.\*\*.10.DTR


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	10	27 2700	1 Narrow 12°	○ 10 White	DTR Phase dim
		30 3000	2 Medium 24°		
			3 Wide 36°		



10001.A.20.99 Spread lens



10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre



CASA RIERA ORDEIX / PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Curriculum-f 90 LOW 230

GOOD NIGHT

10043

Recessed



INDOOR RECESSED





ALEXA, SIRI  
GOOGLE

DIMMABLE

CASAMBI


WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L70/B10>20.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø80 h55mm
<b>Wattage</b>	7W	<b>Dimensions</b>	Ø90 h49mm
<b>Lumen Output</b>	500	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		




10043.7.\*\*.3.10.DTR


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	7	27 2700 30 3000 40 4000	3 Wide 38°	○ 10 White	DTR Phase dim



10001.A.20.99 Spread lens



10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre





PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Curriculum-f 90 GU10

GOOD NIGHT

10043

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø80 h109mm
<b>Dimensions</b>	Ø90 h105mm
<b>Adjustable</b>	No



10043.GU10.X.XX.10.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10043	GU10	XX Depending on lamp	XX Depending on lamp	○ 10 White	Depending on lamp





PROJECT: OCTAVIO MESTRE ARQUITECTOS




<b>Installation</b>	Indoor	
<b>Mounting Position</b>	Ceiling recessed	
<b>IP</b>	20	
<b>Wattage</b>	11W	15W
<b>Lumen Output</b>	820	1200
<b>Connection</b>	250mA	350mA
<b>Driver</b>	Included remote	
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)	


<b>CRI</b>	>90
<b>Life Time</b>	40.000 h
<b>Cut-out Size</b>	Ø90 h102mm
<b>Dimensions</b>	Ø104 h92mm
<b>Adjustable</b>	+/- 20°

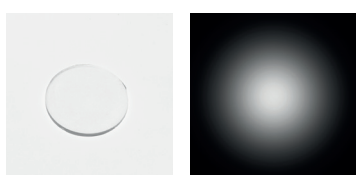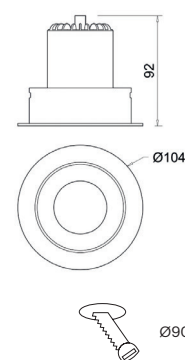

10001.A.20.99 Spread lens

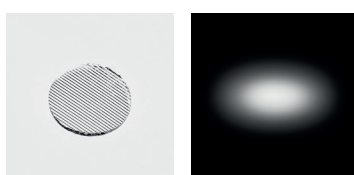




10001.A.10.99 Oval lens



10001.A.30.99 Honeycomb Louvre


Recessed

10005.\*\*.\*\*.\*.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10005	11	27 2700	 1 Narrow 20°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	15	30 3000	 2 Medium 40°		
			 4 Superwide 60°		

10005.GU10.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish
10005	GU10 (230V. lamp not included)	XX	X	○ 10 White

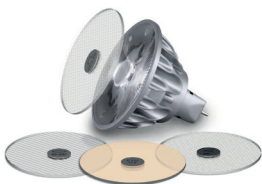

Available SORAA lamps



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



RESTAURANT ARRÓS I PEIX / PROJECT: SANDRA SOLER STUDIO / PHOTO: MERITXELL ARJALAGUER

# Suffixus HE

10013

GOOD NIGHT

Recessed



ALEXA, SIRI  
GOOGLE




DIMMABLE



CASAMBI



WIRELESS




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)


<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	Ø62 mm
<b>Adjustable</b>	No



<b>Wattage</b>	5W
<b>Lumen Output</b>	750
<b>Connection</b>	150mA
<b>Dimensions</b>	Ø68 h91mm
<b>Cut-out size</b>	Ø62 h101mm

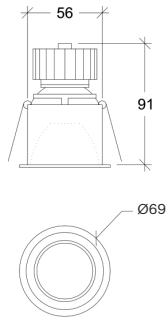

<b>Wattage</b>	8,6W
<b>Lumen Output</b>	1200
<b>Connection</b>	250mA
<b>Dimensions</b>	Ø69 h118mm
<b>Cut-out size</b>	Ø62 h126mm

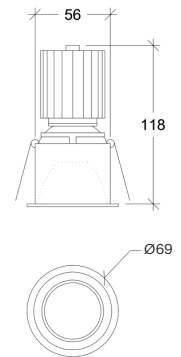

10013.\*.\*\*.\*.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	5	27 2700	1 Narrow 15°	⊙ 11 White & White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	⊙ 14 White & Gold	
		40 4000	3 Wide 39°	⊙ 22 Black & Black	
		4 Superwide 61°	⊙ 24 Black & Gold		



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA




# Suffixus T230



10013

GOOD NIGHT

Recessed

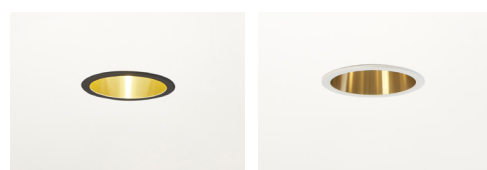

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10>25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø62 h130mm
<b>Wattage</b>	10W	<b>Dimensions</b>	Ø68 h121mm
<b>Lumen Output</b>	760	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		



10013.10.\*\*.\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black	
			● 24 Black & Gold		





RESIDENCIA MAS ANGLI / PROJECT: NORA BATLLE



# Suffixus LOW 230

10013

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI





WIRELESS




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	7W
<b>Lumen Output</b>	500
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>80
<b>Life Time</b>	L70/B10>20.000 h
<b>Cut-out Size</b>	Ø62 h71mm
<b>Dimensions</b>	Ø68 h61mm
<b>Adjustable</b>	No



10013.7.\*\*.3.\*\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	7	27 2700	3 Wide 36°	⊙ 11 White & White	DTR Phase dim
		30 3000		⊙ 14 White & Gold	
		40 4000		⊙ 22 Black & Black	
				⊙ 24 Black & Gold	

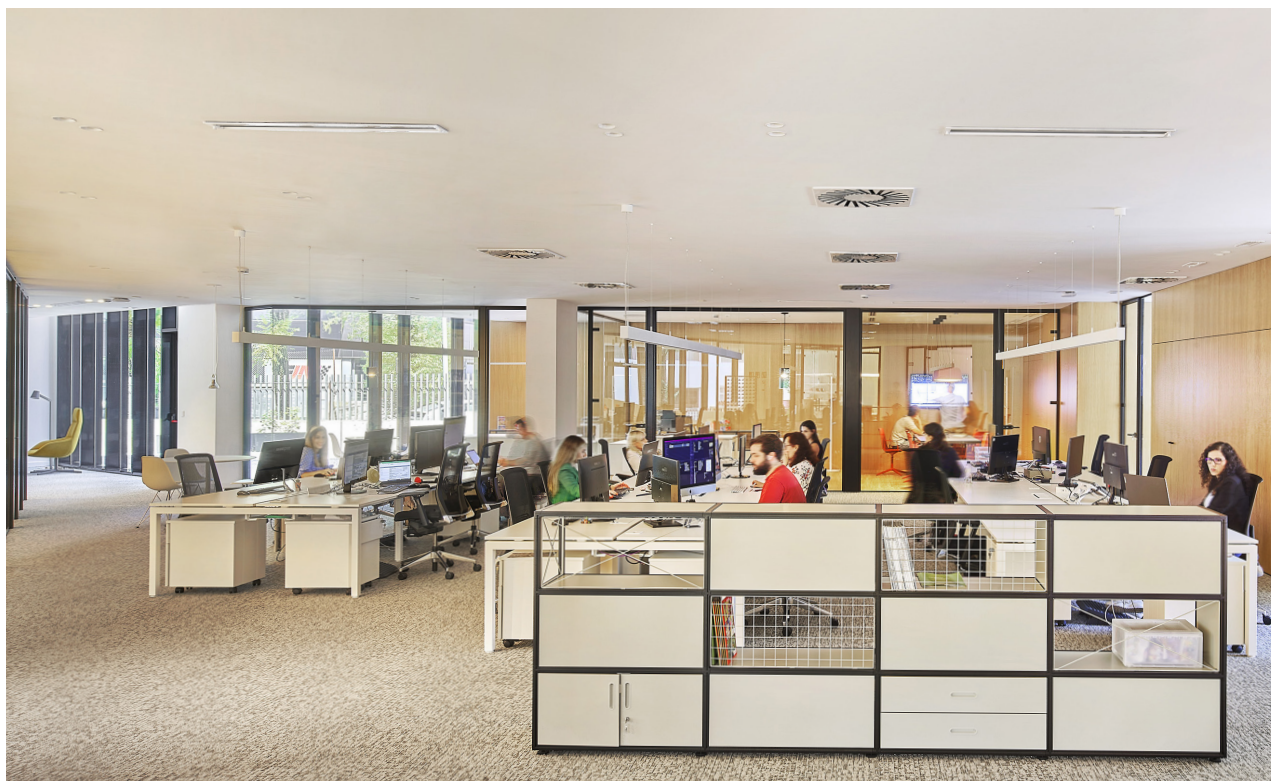

MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA



# Suffixus GU10

10013

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI





WIRELESS




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø62 h120 mm
<b>Dimensions</b>	Ø68 h111 mm
<b>Adjustable</b>	No



10013.GU10.XX.X.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10013	GU10	XX Depending on lamp	XX Depending on lamp	⊙ 11 White & White	Depending on lamp
				⊙ 14 White & Gold	
				⊙ 22 Black & Black	
				⊙ 24 Black & Gold	

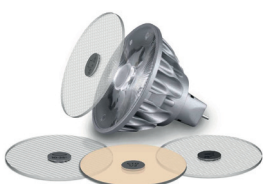

Available SORAA lamps



PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: MARC TORRA



# Marcus HE

10012

GOOD NIGHT

Recessed



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI





WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)



<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	Ø65mm
<b>Adjustable</b>	Yes



<b>Wattage</b>	5W
<b>Lumen Output</b>	750
<b>Connection</b>	150mA
<b>Dimensions</b>	Ø72 h71mm
<b>Cut-out size</b>	Ø65 h81mm



<b>Wattage</b>	8,6W
<b>Lumen Output</b>	1200
<b>Connection</b>	250mA
<b>Dimensions</b>	Ø72 h98mm
<b>Cut-out size</b>	Ø65 h110mm



10012.\*.\*\*.\*.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
		30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°	● 40 Gold	
			4 Superwide 61°		



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCE GOST



# Marcus T230

10012

GOOD NIGHT

Recessed



INDOOR RECESSED





ALEXA, SIRI  
GOOGLE

DIMMABLE

CASAMBI

WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10>25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø65 h125mm
<b>Wattage</b>	10W	<b>Dimensions</b>	Ø72 h100mm
<b>Lumen Output</b>	760	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		



10012.10.\*\*.\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	10	27 2700	1 Narrow 12°	○ 10 White	DTR Phase dim
		30 3000	2 Medium 24°	● 20 Black	
		40 4000	3 Wide 36°	● 40 Gold	





PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



# Marcus LOW 230

10012

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI




WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	7W
<b>Lumen Output</b>	500
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>80
<b>Life Time</b>	L70/B10>20.000 h
<b>Cut-out Size</b>	Ø65 h50mm
<b>Dimensions</b>	Ø72 h41mm
<b>Adjustable</b>	No



10012.7.\*\*.3.\*\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	7	27 2700	 3 Wide 38°	○ 10 White	DTR Phase dim
		30 3000		● 20 Black	
		40 4000		● 40 Gold	



RESIDENCIA MAS ANGLI / PROJECT: NORA BATLLE



# Marcus GU10

10012

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø65 h95mm
<b>Dimensions</b>	Ø72 h92mm
<b>Adjustable</b>	No



10012.GU10.XX.X.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10012	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> <li>○ 10 White</li> <li>● 20 Black</li> <li>● 40 Gold</li> </ul>	Depending on lamp



SON BRULL / PROJECT: FORTEZA + APARICIO / PHOTO: ART SÁNCHEZ



# Obliquo HE

10009

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI




WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)


<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out size</b>	Ø62 mm
<b>Adjustable</b>	No



<b>Wattage</b>	5W
<b>Lumen Output</b>	750
<b>Connection</b>	150mA
<b>Dimensions</b>	Ø68 h61mm
<b>Cut-out size</b>	Ø62 h73mm

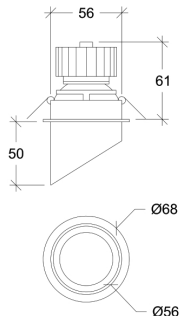


<b>Wattage</b>	8,6W
<b>Lumen Output</b>	1200
<b>Connection</b>	250mA
<b>Dimensions</b>	Ø68 h88mm
<b>Cut-out size</b>	Ø62 h100mm

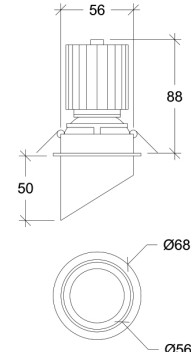

10009.\*.\*.\*.\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	5	27 2700	1 Narrow 15°	11 White & White	XXX Driver not included built-in
	9	30 3000	2 Medium 25°	14 White & Gold	
		40 4000	3 Wide 39°	22 Black & Black	
	4 Superwide 61°	24 Black & Gold			

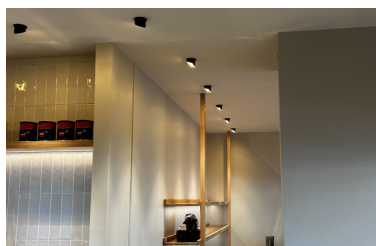

EL CROSANET / PROJECT: SANDRA SOLER STUDIO

# Obliquo T230

10009

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10>25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø62 h100mm
<b>Wattage</b>	10W	<b>Dimensions</b>	Ø68 h90mm
<b>Lumen Output</b>	760	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		

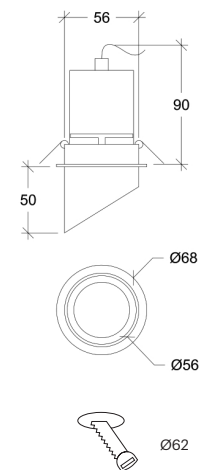

10009.10.\*\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase dim
		30 3000	2 Medium 24°	⊙ 14 White & Gold	
		40 4000	3 Wide 36°	⊙ 22 Black & Black	
				● 24 Black & Gold	

# Obliquo LOW 230

10009

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	7W
<b>Lumen Output</b>	500
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>80
<b>Life Time</b>	L70/B10>20.000 h
<b>Cut-out Size</b>	Ø62 h35mm
<b>Dimensions</b>	Ø68 h31mm
<b>Adjustable</b>	No

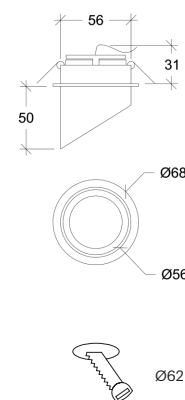

10009.7.\*\*.3.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	7	27 2700	3 Wide 38°	11 White & White	DTR Phase dim
		30 3000		14 White & Gold	
		40 4000		22 Black & Black	
				24 Black & Gold	





# Obliquo GU10

10009

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø62 h86mm
<b>Dimensions</b>	Ø68 h82mm
<b>Adjustable</b>	No



10009.GU10.XX.X.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10009	GU10	XX Depending on lamp	XX Depending on lamp	⊙ 11 White & White	Depending on lamp
				⊙ 14 White & Gold	
				⊙ 22 Black & Black	
				⊙ 24 Black & Gold	



# Pendo HE

10010

GOOD NIGHT



Recessed



<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out size</b>	Ø62 mm
<b>Driver</b>	Not included	<b>Adjustable</b>	No
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)		



<b>Wattage</b>	5W		<b>Wattage</b>	8,6W	
<b>Lumen Output</b>	750		<b>Lumen Output</b>	1200	
<b>Connection</b>	150mA		<b>Connection</b>	250mA	
<b>Dimensions</b>	Ø68 h61mm		<b>Dimensions</b>	Ø68 h88mm	
<b>Cut-out size</b>	Ø62 h71mm		<b>Cut-out size</b>	Ø62 h98mm	



10010.\*\*.\*\*\*.XXX



Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	5	27 2700	1 Narrow 15°	⊙ 11 White & White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	⊙ 14 White & Gold	
		40 4000	3 Wide 39°	⊙ 22 Black & Black	
			4 Superwide 61°	⊙ 24 Black & Gold	

# Pendo T230

10010



GOOD NIGHT

Recessed



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	10W
<b>Lumen Output</b>	760
<b>Connection</b>	230V
<b>Driver</b>	Not included
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10>25.000 h
<b>Cut-out Size</b>	Ø62 h100mm
<b>Dimensions</b>	Ø68 h90mm
<b>Adjustable</b>	No



10010.10.\*\*.\*\*\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black	
			● 24 Black & Gold		



# Pendo LOW 230

10010

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L70/B10>20.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø62 h40mm
<b>Wattage</b>	7W	<b>Dimensions</b>	Ø68 h31mm
<b>Lumen Output</b>	500	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		



10010.7.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	7	27 2700	3 Wide 38°	⊙ 11 White & White	DTR Phase dim
		30 3000		● 14 White & Gold	
		40 4000		⦿ 22 Black & Black	
		● 24 Black & Gold			



# Pendo GU10

10010

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø62 h92mm
<b>Dimensions</b>	Ø68 h82mm
<b>Adjustable</b>	No



10010.GU10.XX.X.\*\*.

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10010	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> <li>⊙ 11 White &amp; White</li> <li>⦿ 14 White &amp; Gold</li> <li>⦿ 22 Black &amp; Black</li> <li>⦿ 24 Black &amp; Gold</li> </ul>	Depending on lamp



Balnearis

10007

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI




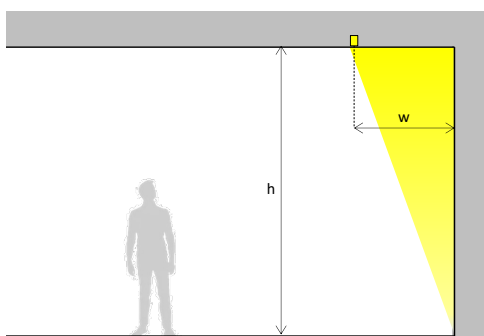
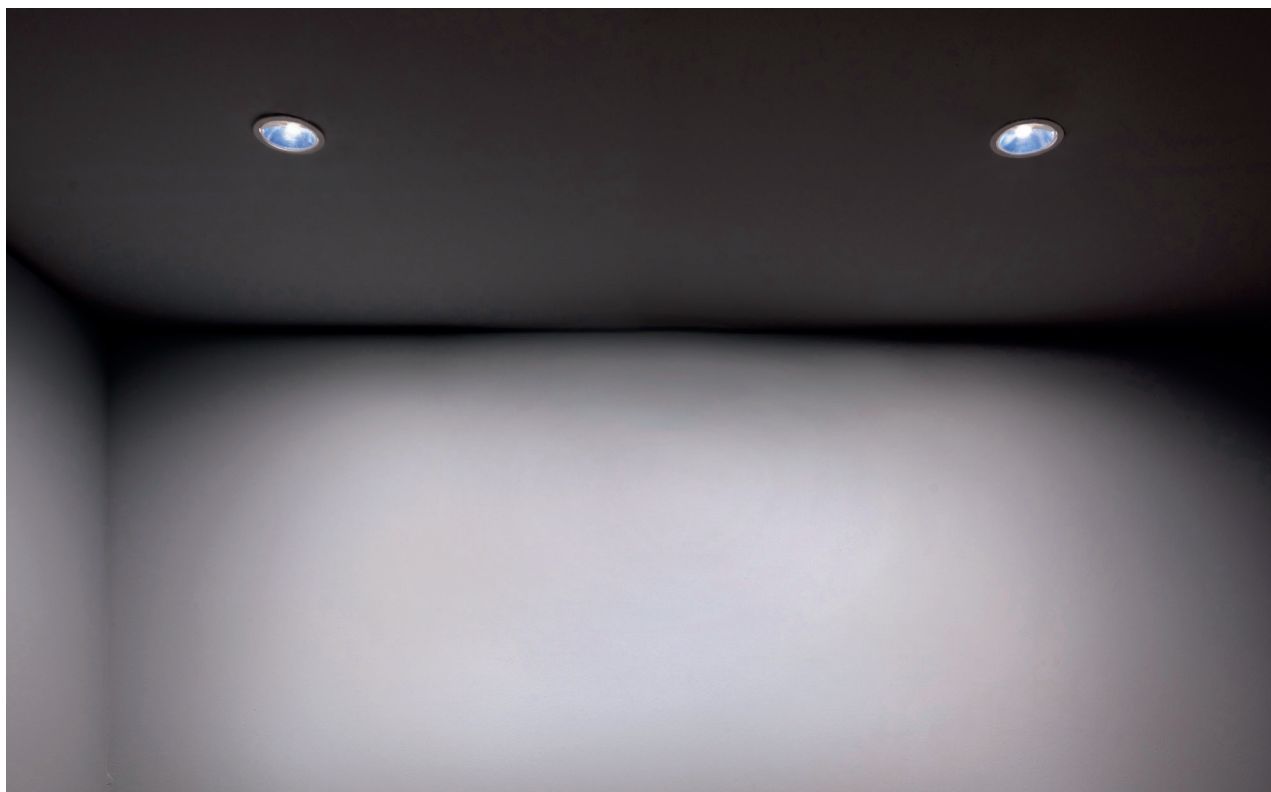
WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø75 h80mm
<b>Wattage</b>	12W	<b>Dimensions</b>	Ø85 h70mm
<b>Lumen Output</b>	900	<b>Adjustable</b>	No
<b>Connection</b>	300mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		




10007.12.\*\*.5.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10007	12	27 2700 30 3000	 5 Asymmetric 50°	○ 10 White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request



Recommended layout

$w \approx 0,4 \times h$   
 $d \leq 1,2 \times w$

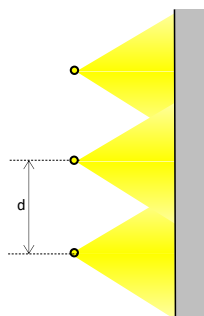



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø56 h105mm
<b>Wattage</b>	8W	<b>Dimensions</b>	Ø60 h95mm
<b>Lumen Output</b>	600	<b>Adjustable</b>	No
<b>Connection</b>	150mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		




10011.8.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10011	8	27 2700	1 Narrow 15°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°	● 20 Black	
			3 Wide 36°		






GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS

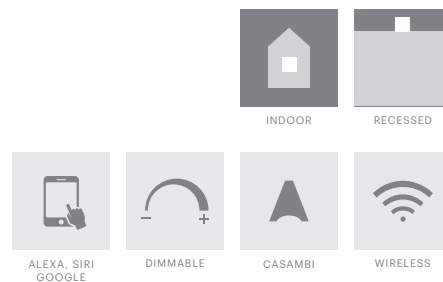

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø56 h93mm
<b>Wattage</b>	8W	<b>Dimensions</b>	Ø60 h83mm
<b>Lumen Output</b>	600	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		

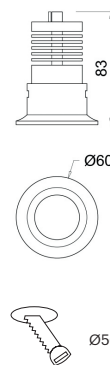

10014.8.\*\*.\*10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10014	8	27 2700	1 Narrow 15°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°		
			3 Wide 36°		



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø56 h93mm
<b>Wattage</b>	8W	<b>Dimensions</b>	Ø60 h83mm
<b>Lumen Output</b>	600	<b>Adjustable</b>	+/- 15°
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10015.8.\*\*.\*10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10015	8	27 2700	1 Narrow 15°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°		
			3 Wide 36°		

# Deminutus



10019

GOOD NIGHT






Recessed




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø45 h39mm
<b>Wattage</b>	3W	<b>Dimensions</b>	Ø52 h29mm
<b>Lumen Output</b>	140	<b>Adjustable</b>	+/- 25°
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimnable drivers on request)		



10019.3.30.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10019	3	30 3000	<ul style="list-style-type: none"> <li> 1 Narrow 10°</li> <li> 2 Medium 25°</li> <li> 3 Wide 45°</li> </ul>	<ul style="list-style-type: none"> <li> 10 White</li> <li> 20 Black</li> </ul>	<p><b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request</p>

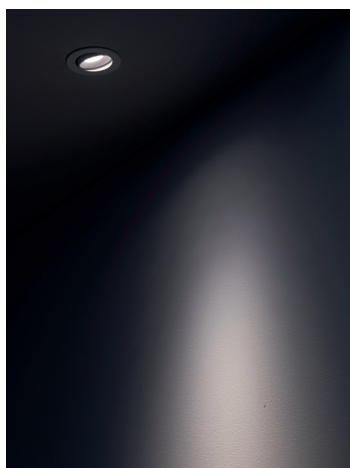

Nolitus

10059

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	6,1W
<b>Lumen Output</b>	635
<b>Connection</b>	350mA
<b>Driver</b>	Included remote
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>90
<b>Life Time</b>	L70/B10 >50.000 h
<b>Cut-out Size</b>	Ø63 h100mm
<b>Dimensions</b>	Ø68 h94mm
<b>Adjustable</b>	No



10059.6.\*\*.2.20.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10059	6	27 2700	2 Medium 40°	○ 10 White ● 20 Black ● 30 Aluminium ● 40 Gold ● 80 Copper	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000			

Other finishes available upon request

# Parvus R

10016

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø62 h75mm
<b>Wattage</b>	6,1W	<b>Dimensions</b>	Ø70 h63mm
<b>Lumen Output</b>	635	<b>Adjustable</b>	No
<b>Connection</b>	350mA		
<b>Driver</b>	Not included		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)		



10016.6. \*\*.3.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10016	6	27 2700 30 3000	3 Wide 40°	<ul style="list-style-type: none"> <li>○ 10 White</li> <li>● 20 Black</li> <li>● 30 Aluminium</li> <li>● 40 Gold</li> <li>● 80 Copper</li> </ul>	XXX Driver not included (See drivers section)

Other finishes available upon request

Parvus Q

10017

GOOD NIGHT

Recessed





INDOOR RECESSED



ALEXA, SIRI GOOGLE DIMMABLE CASAMBI WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	50x50 h68mm
<b>Wattage</b>	6,1W	<b>Dimensions</b>	54x54 h58mm
<b>Lumen Output</b>	635	<b>Adjustable</b>	No
<b>Connection</b>	350mA		
<b>Driver</b>	Not included		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)		



10016.6. \*\*.3.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10017	6	27 2700 30 3000	3 Wide 40°	<ul style="list-style-type: none"> <li> 10 White</li> <li> 20 Black</li> <li> 30 Aluminium</li> <li> 40 Gold</li> <li> 80 Copper</li> </ul> <p>Other finishes available upon request</p>	XXX Driver not included (See drivers section)

# Mini Parvus

10070

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Recessed only for wood ceiling	<b>Life Time</b>	L90/B20 >50.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø40 h62mm
<b>Wattage</b>	3,3W	<b>Dimensions</b>	Ø45 h52mm
<b>Lumen Output</b>	440	<b>Adjustable</b>	No
<b>Connection</b>	100mA		
<b>Driver</b>	Not included		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)		



NOTE: The driver does not fit through the fixture hole

10070.3.\*\*.2.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10070	3	27 2700 30 3000	2 Medium 40°	<ul style="list-style-type: none"> <li>○ 10 White</li> <li>● 20 Black</li> <li>● 30 Aluminium</li> <li>● 40 Gold</li> <li>● B0 Copper</li> </ul>	XXX Driver not included (See drivers section)



# Mini Parvus Wood


10060

GOOD NIGHT

Recessed




Only for installation in wood

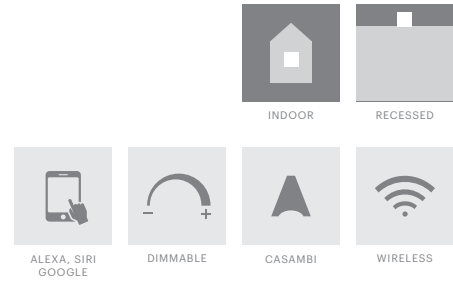

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Recessed only for wood ceiling
<b>IP</b>	20
<b>Wattage</b>	3,3W
<b>Lumen Output</b>	440
<b>Connection</b>	100mA
<b>Driver</b>	Not included
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>90
<b>Life Time</b>	L90/B20 >50.000 h
<b>Cut-out Size</b>	Ø33 h45mm
<b>Dimensions</b>	Ø36 h42mm
<b>Adjustable</b>	No

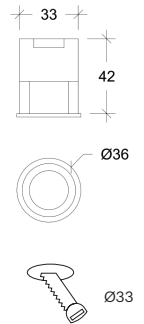

NOTE: The driver does not fit through the fixture hole

10060.3.\*\*.2.20.XXX


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10060	3	27 2700 30 3000	2 Medium 40°	● 20 Black	XXX Driver not included (See drivers section)

Honoris

10203

GOOD NIGHT

Recessed

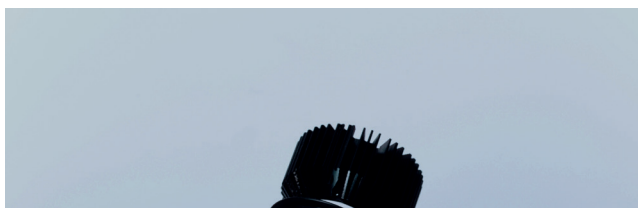

INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	35.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø83 h110mm
<b>Wattage</b>	9.3W	<b>Dimensions</b>	Ø90 h100mm
<b>Lumen Output</b>	870	<b>Adjustable</b>	+/- 20°
<b>Connection</b>	500mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		

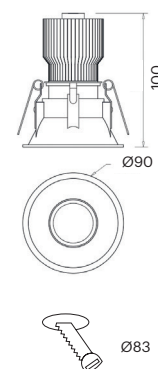

10203.9.27.\*,\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10203	9	27 2700	1 Narrow 24°	⊙ 11 White & White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request
			2 Medium 38°	⊙ 14 White & Gold	

# Honestus R HE

10023

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI





WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Driver	Not included
Dimmable	ON/OFF, DALI, PUSH (See drivers section)



CRI	>90
Life Time	L80/B10>25.000 h
Cut-out size	Ø82mm
Adjustable	Yes



Wattage	5W
Lumen Output	750
Connection	150mA
Dimensions	Ø90 h85mm
Cut-out size	Ø82 h105mm



Wattage	8,6W
Lumen Output	1200
Connection	250mA
Dimensions	Ø90 h112mm
Cut-out size	Ø82 h122mm



10023.\*\*.\*.\*.\*.XXX



Number	W	Colour Temperature	Light Distribution	Finish	Dim
10023	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°		
		4 Superwide 61°			

# Honestus Q HE


10024

GOOD NIGHT


Recessed




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>90	 80x80
<b>Life Time</b>	L80/B10>25.000 h	
<b>Cut-out size</b>	80x80 mm	
<b>Adjustable</b>	Yes	



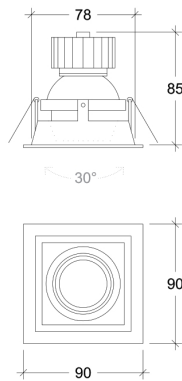

<b>Wattage</b>	5W
<b>Lumen Output</b>	750
<b>Connection</b>	150mA
<b>Dimensions</b>	90x90 h85mm
<b>Cut-out size</b>	80x80 h95mm

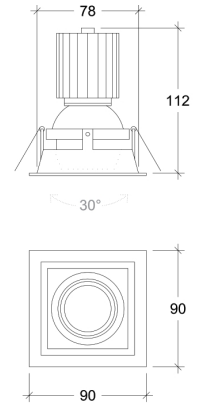

<b>Wattage</b>	8,6W
<b>Lumen Output</b>	1200
<b>Connection</b>	250mA
<b>Dimensions</b>	90x90 h112mm
<b>Cut-out size</b>	80x80 h122mm



10024.\*.\*\*.\*.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10024	5	27 2700	 1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	 2 Medium 25°	● 20 Black	
		40 4000	 3 Wide 39°		
			 4 Superwide 61°		

# Honestus Q2 HE

10025

GOOD NIGHT

Recessed





<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)



<b>CRI</b>	>90
<b>Life Time</b>	L80/B10>25.000 h
<b>Cut-out size</b>	165x80 mm
<b>Adjustable</b>	Yes



<b>Wattage</b>	2 x 5W
<b>Lumen Output</b>	2 x 750
<b>Connection</b>	150mA
<b>Dimensions</b>	175x90 h85mm
<b>Cut-out size</b>	165x80 h95mm

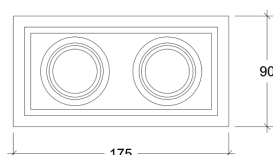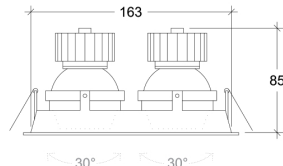

<b>Wattage</b>	2 x 8,6W
<b>Lumen Output</b>	2 x 1200
<b>Connection</b>	250mA
<b>Dimensions</b>	175x90 h112mm
<b>Cut-out size</b>	165x80 h122mm

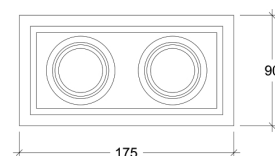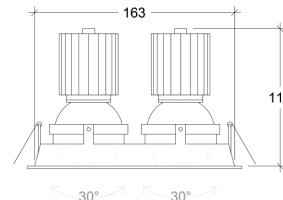

10025.\*\*.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10025	10	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
	18	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°		
			4 Superwide 61°		

# Cicada HE


10029

GOOD NIGHT

Recessed



<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Recessed only for wood ceiling	<b>Life Time</b>	L80/B10>25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø102 h70mm
<b>Wattage</b>	5W	<b>Dimensions</b>	Ø110 h58mm
<b>Lumen Output</b>	700	<b>Adjustable</b>	Yes
<b>Connection</b>	150mA		
<b>Driver</b>	Not included		
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)		

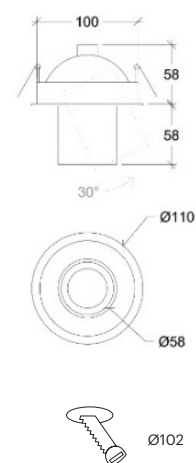

10029.5.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10029	5	27 2700	1 Narrow 15°	○ 10 White	XXX Driver not included (See drivers section)
		30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 39°		
			4 Superwide 61°		

**GOOD NIGHT**

Recessed



# Cicada GU10

10029

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø102 h70mm
<b>Dimensions</b>	Ø110 h58mm
<b>Adjustable</b>	Yes

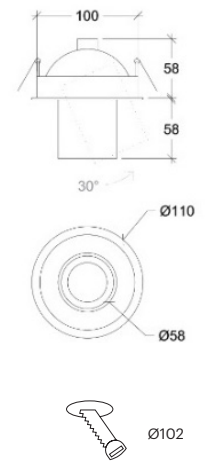


10029.GU10.XX.X.XXX


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10029	GU10	XX Depending on lamp	XX Depending on lamp	<input type="radio"/> 10 White <input type="radio"/> 20 Black	Depending on lamp




GOOD NIGHT


Recessed

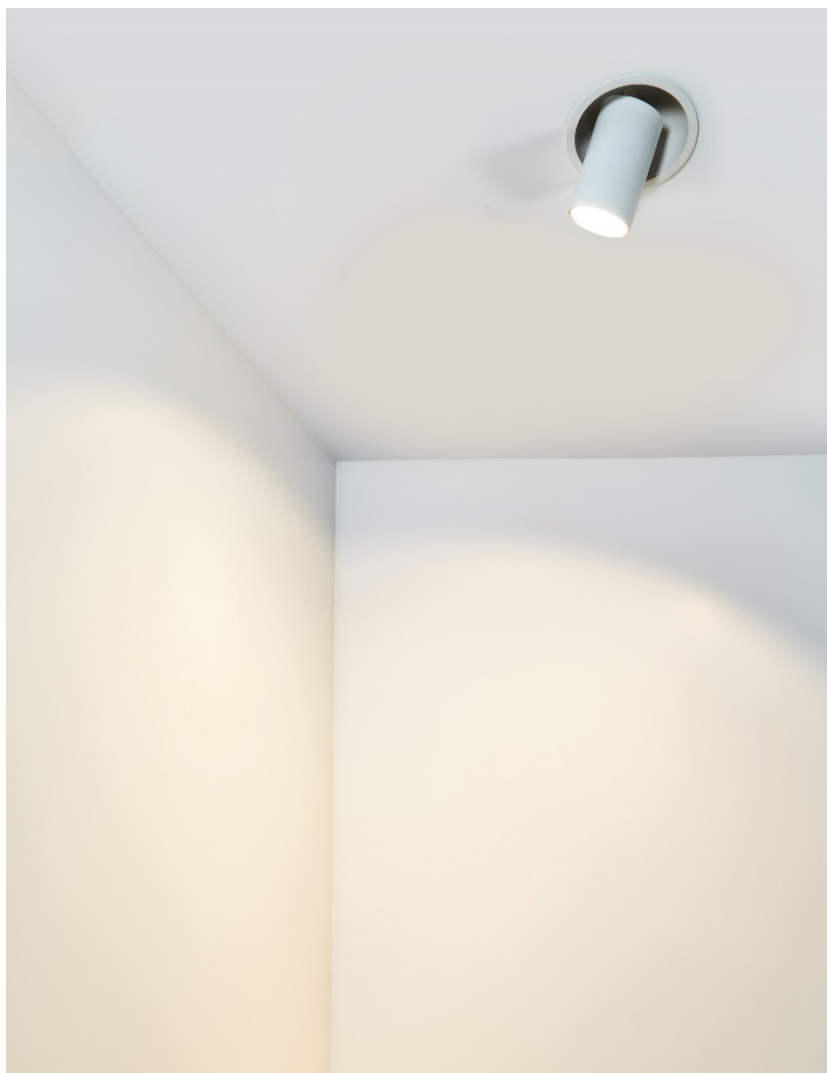

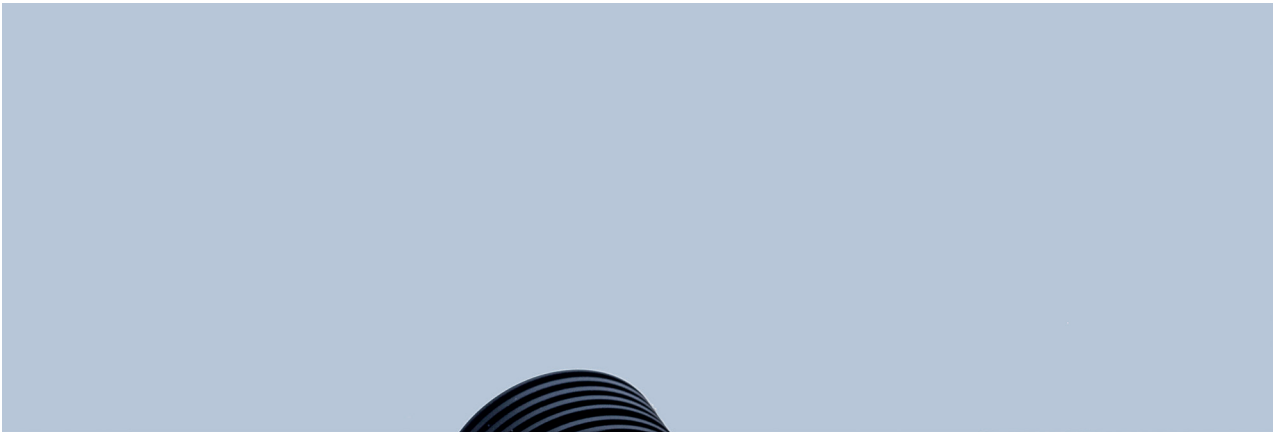

**Installation** Indoor  
**Installation Description** To be combined with LED module & Driver  
**Mounting Position** Ceiling recessed  
**IP** 20

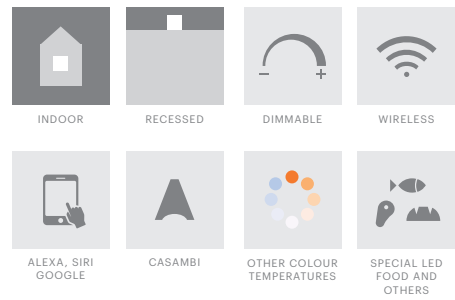


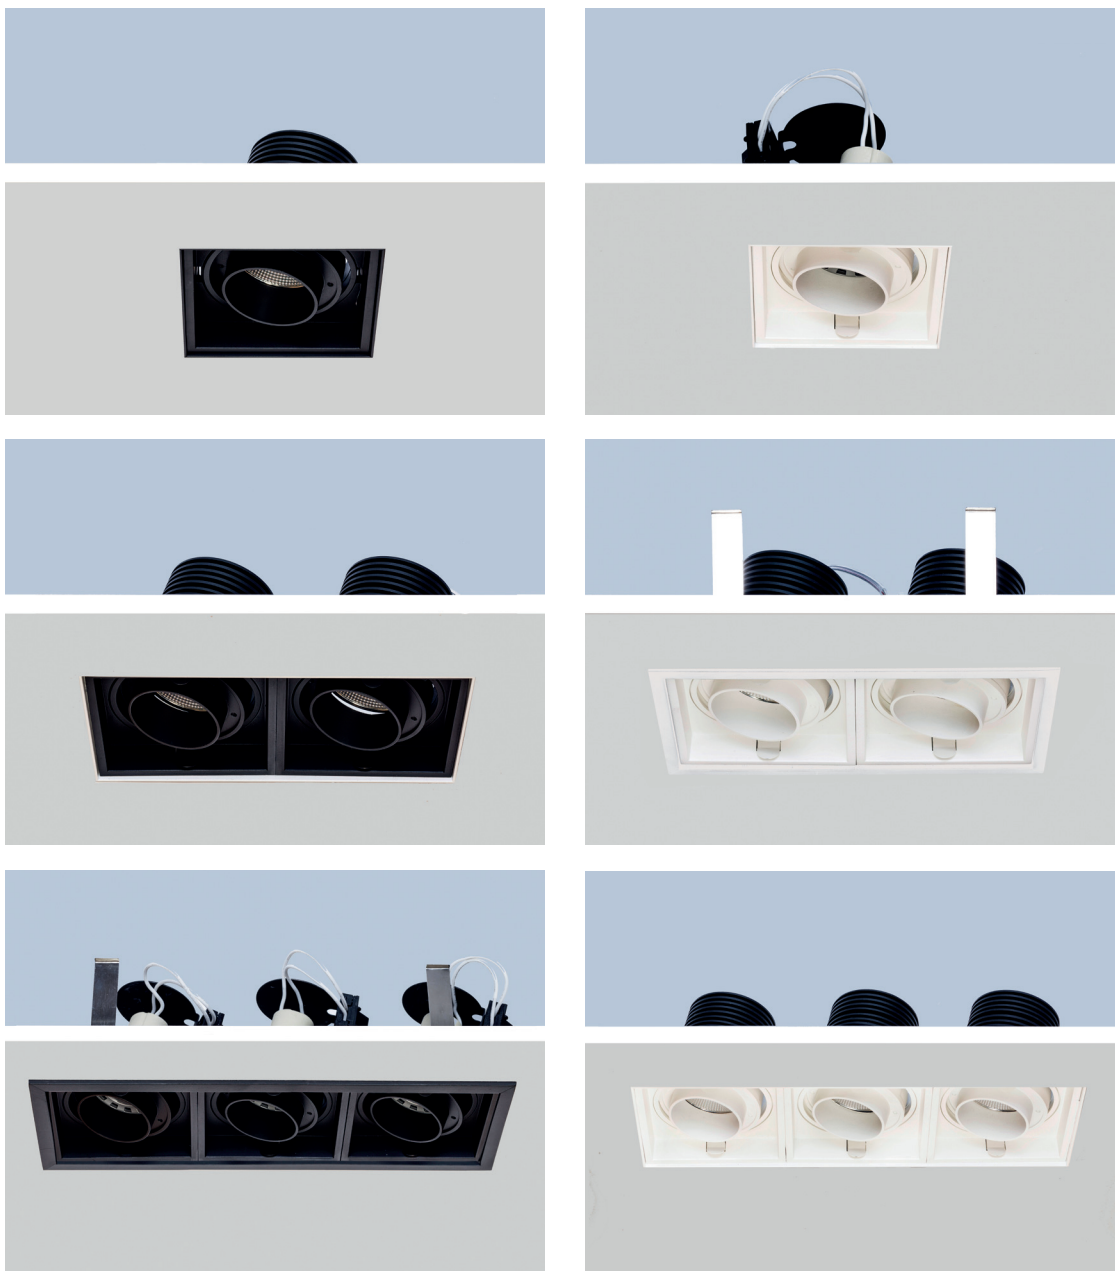


## Quadratum-01 Trimless

10301

GOOD NIGHT

Recessed

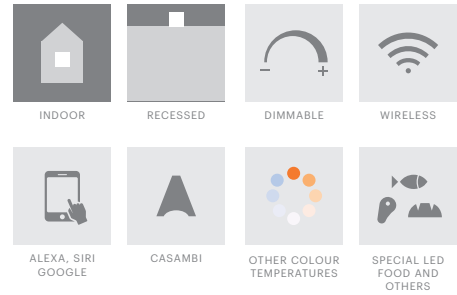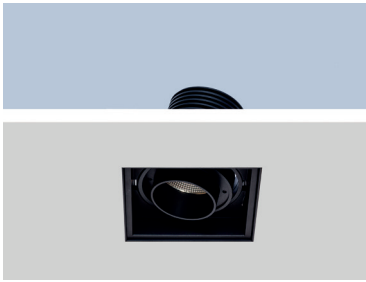


10301.XX.XX.X.\*\*

**Cut-out Size** 97x97 h105mm  
**Dimensions** 97x97 h95mm  
**Adjustable** +/- 30° 359° Rotation

Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10301	XX	XX	X	☉ 11 White & White ● 22 Black & Black

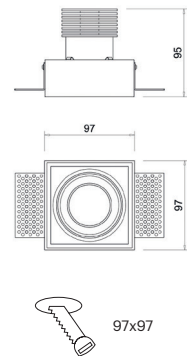

## Quadratum-11

10311




10311.XX.XX.X.\*\*

**Cut-out Size** 104x97 h105mm  
**Dimensions** 106x106 h95mm  
**Adjustable** +/- 30° 359° Rotation

Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10311	XX	XX	X	☉ 11 White & White ● 22 Black & Black

Led module not included in combination with 1 module


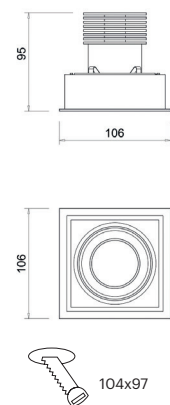


## Quadratum-02 Trimless

10302


GOOD NIGHT

Recessed

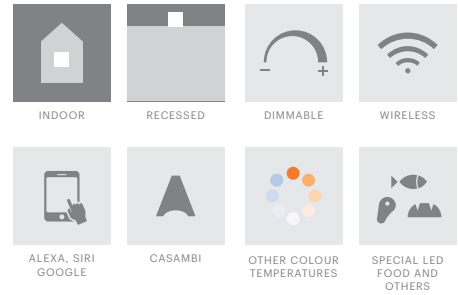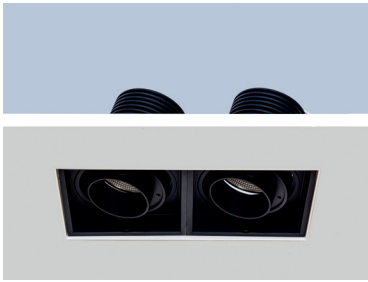


10302.XX.XX.X.\*\*

**Cut-out Size** 97x189 h105mm  
**Dimensions** 97x189 h95mm  
**Adjustable** +/- 30° 359° Rotation

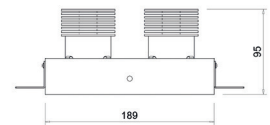


Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10302	XX	XX	X	☉ 11 White & White ● 22 Black & Black

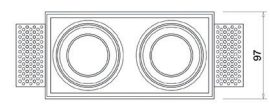


## Quadratum-12

10312

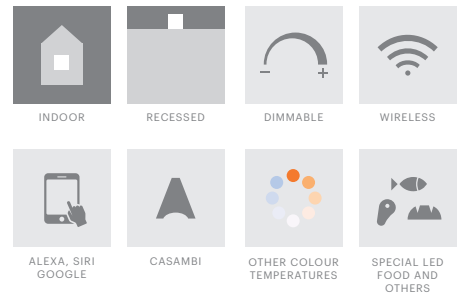


10312.XX.XX.X.\*\*

**Cut-out Size** 104x191 h105mm  
**Dimensions** 106x199 h95mm  
**Adjustable** +/- 30° 359° Rotation



Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10312	XX	XX	X	☉ 11 White & White ● 22 Black & Black




Led module not included in combination with 2 modules

## Quadratum-03 Trimless

10303

GOOD NIGHT

Recessed

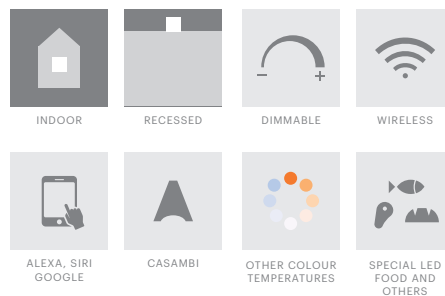


10303.XX.XX.X.\*\*

**Cut-out Size** 97x282 h105mm  
**Dimensions** 97x282 h95mm  
**Adjustable** +/- 30° 359° Rotation




Luminaire without LED & Driver

Number	W	Colour Temperature	Light Distribution	Finish
10313	XX	XX	X	<input type="radio"/> 11 White & White <input type="radio"/> 22 Black & Black

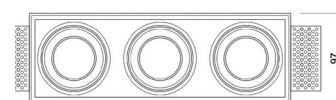


## Quadratum-13

10313

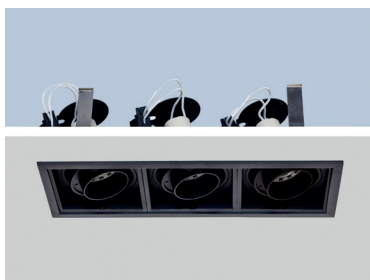


10313.XX.XX.X.\*\*

**Cut-out Size** 104x284 h105mm  
**Dimensions** 106x292 h95mm  
**Adjustable** +/- 30° 359° Rotation

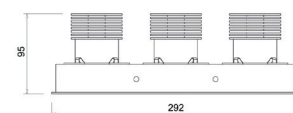

Luminaire without LED & Driver




Number	W	Colour Temperature	Light Distribution	Finish
10313	XX	XX	X	<input type="radio"/> 11 White & White <input type="radio"/> 22 Black & Black



Led module not included in combination with 3 modules

60001.\*\*.\*\*.\*

LED with Driver


Number	W	Colour Temperature	Light Distribution
60001	11	27 2700	 1 Narrow 20°
	15	30 3000	 2 Medium 40°
			 4 Superwide 60°



Wattage	11W	15W
Lumen Output	820	1200
Connection	500mA	350mA
Driver	Included remote	
Colour Temperature	2700K	3000K
CRI	>90	
Dimmable	ON/OFF, DALI, PUSH (dimmable drivers on request)	

10300.GU10

GU10 adapter for Quadratum

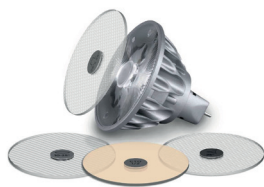


Available SORAA lamps

# Compactus-1


10503

GOOD NIGHT

Recessed

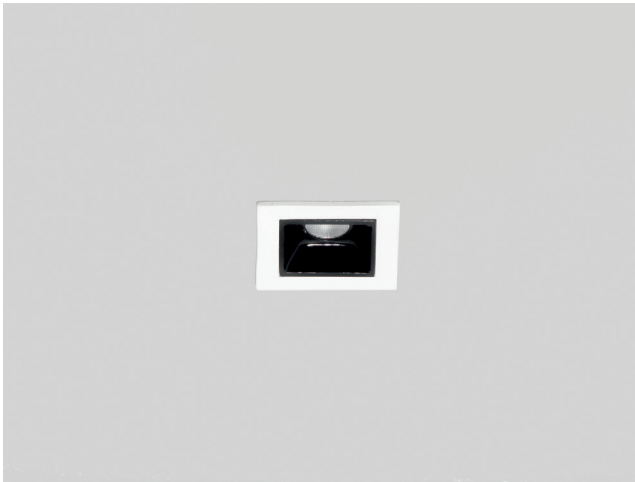


<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	37x37 h42mm
<b>Wattage</b>	3W	<b>Dimensions</b>	45x45 h39mm
<b>Lumen Output</b>	160	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		

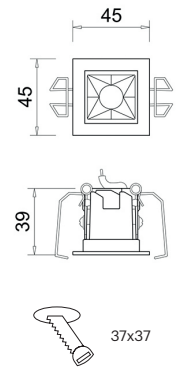

10503.3.27.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10503	3	27 2700	<ul style="list-style-type: none"> <li> 1 Narrow 15°</li> <li> 2 Medium 30°</li> <li> 3 Wide 45°</li> </ul>	<ul style="list-style-type: none"> <li> 11 White &amp; White</li> <li> 12 White &amp; Black</li> </ul>	<p><b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request</p>

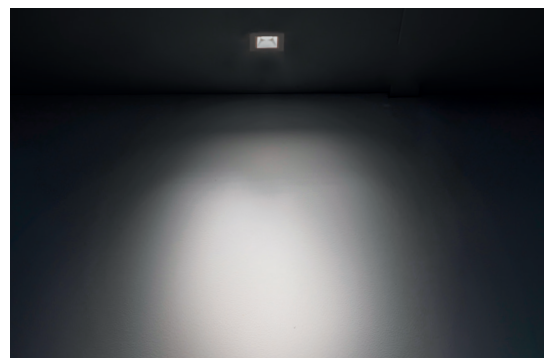




# Compactus-2

10506

GOOD NIGHT

Recessed

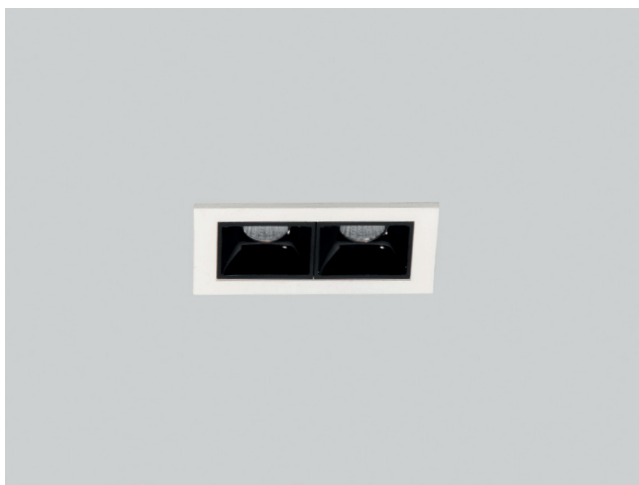

INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI





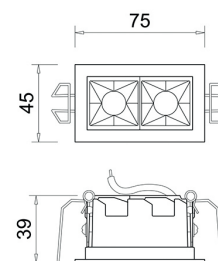


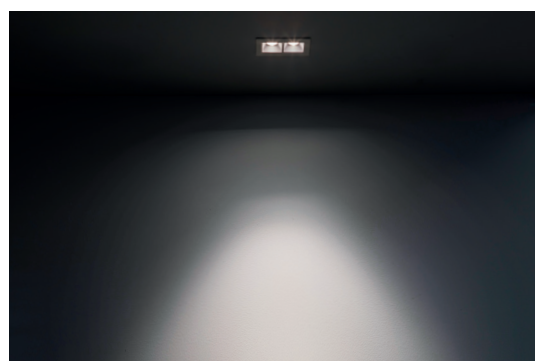
WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	68x37 h42mm
<b>Wattage</b>	6W	<b>Dimensions</b>	75x45 h39mm
<b>Lumen Output</b>	360	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10506.6.27.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10506	6	27 2700	<ul style="list-style-type: none"> <li> 1 Narrow 15°</li> <li> 2 Medium 30°</li> <li> 3 Wide 45°</li> </ul>	<ul style="list-style-type: none"> <li> 11 White &amp; White</li> <li> 12 White &amp; Black</li> </ul>	<p><b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request</p>




# Compactus-5


10512

GOOD NIGHT

Recessed




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	140x37 h42mm
<b>Wattage</b>	12W	<b>Dimensions</b>	148x45 h39mm
<b>Lumen Output</b>	870	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10512.12.27.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10512	12	27 2700	1 Narrow 15°	11 White & White	NDI* Driver included (non-dimmable) Dimmable driver upon request
			2 Medium 30°	12 White & Black	
			3 Wide 45°		

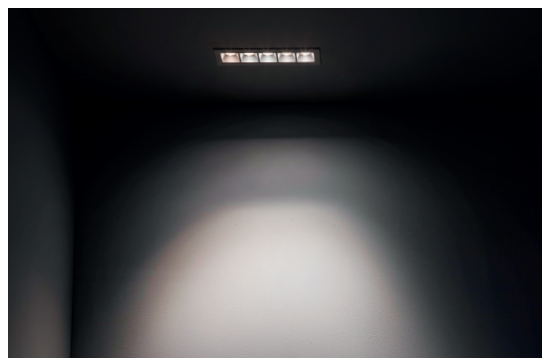

# Compactus-Asy

10612

GOOD NIGHT

Recessed




INDOOR RECESSED



ALEXA, SIRI, GOOGLE DIMMABLE CASAMBI WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	140x37 h46mm
<b>Wattage</b>	12W	<b>Dimensions</b>	148x45 h39mm
<b>Lumen Output</b>	790	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmmable drivers on request)		



10612.12.27.5.12

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10612	12	27 2700	5 Asymetric	● 12 White & Black	NDI* Driver included (non-dimmable) Dimmable driver upon request



# Celum 1

10601

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	36x36 h45mm
<b>Wattage</b>	2W	<b>Dimensions</b>	44x44mm
<b>Lumen Output</b>	210	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		



10601.2.\*\*.\*\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10601	2	27 2700	2 Medium 30°	⊙ 11 White & White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	3 Wide 48°	⊙ 12 White & Black	



# Celum 3


10603

GOOD NIGHT

Recessed



<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	38x83 h49mm
<b>Wattage</b>	6W	<b>Dimensions</b>	44x90 h47mm
<b>Lumen Output</b>	630	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		

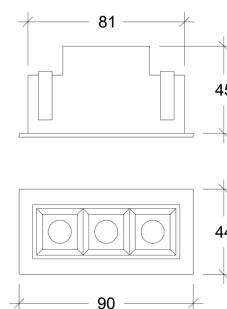

10603.6.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10603	6	27 2700	2 Medium 30°	⊙ 11 White & White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	3 Wide 48°	● 12 White & Black	



# Celum 5

10605

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	36x130 h55mm
<b>Wattage</b>	10W	<b>Dimensions</b>	44x138 h52mm
<b>Lumen Output</b>	1050	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		

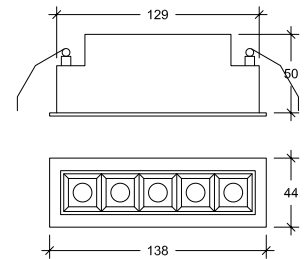

10605.10.\*\*.\*.\*\*


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10605	10	27 2700	2 Medium 30°	⊙ 11 White & White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	3 Wide 48°	⊙ 12 White & Black	

# Celum 5A


10606

GOOD NIGHT

Recessed

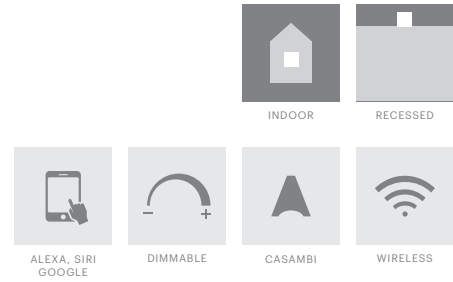

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	76x149 h90mm
<b>Wattage</b>	10W	<b>Dimensions</b>	83x155 h80mm
<b>Lumen Output</b>	1050	<b>Adjustable</b>	Yes
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)		

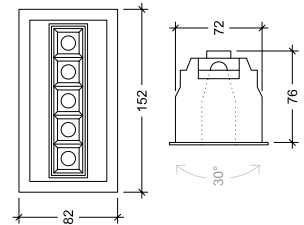

10606.10.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10606	10	27 2700	2 Medium 30°	⊙ 11 White & White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	3 Wide 48°	● 12 White & Black	

# Celum 10

10610

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	20W
<b>Lumen Output</b>	2100
<b>Connection</b>	700mA
<b>Driver</b>	Included remote
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)

<b>CRI</b>	>90
<b>Life Time</b>	40.000 h
<b>Cut-out Size</b>	36x250 h55mm
<b>Dimensions</b>	44x257mm
<b>Adjustable</b>	No

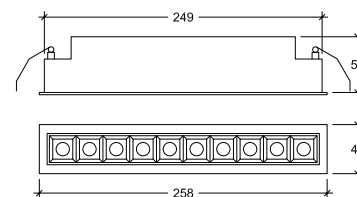


10610.20.\*\*.\*.\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10610	20	27 2700	2 Medium 30°	⊙ 11 White & White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	3 Wide 48°	⊙ 12 White & Black	





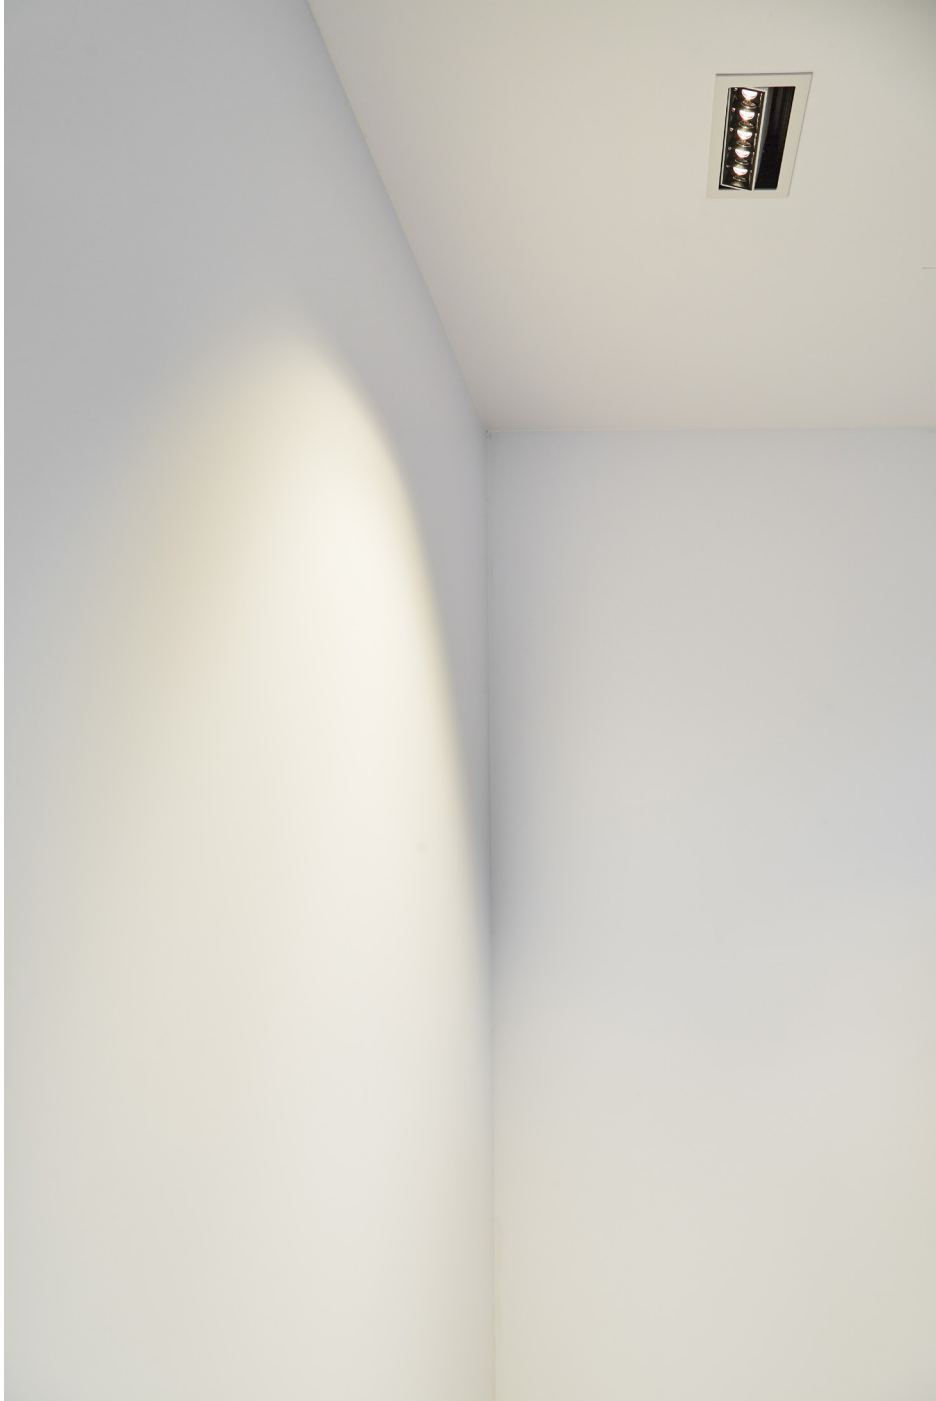

# Incognit GU10

10502

GOOD NIGHT

Recessed



INDOOR RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI






WIRELESS

Gypsum material  
Paintable



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen Output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	83x83 h135mm
<b>Dimensions</b>	80x80 h131mm Ø55mm
<b>Adjustable</b>	No

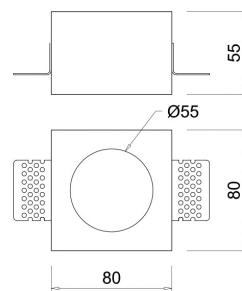

10501.GU10.XX.X.90

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10502	GU10	XX	XX	○ 90 Gypsum	Depending on lamp

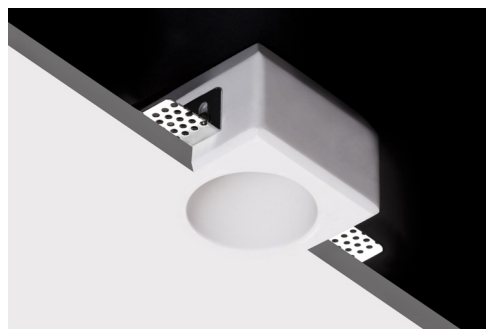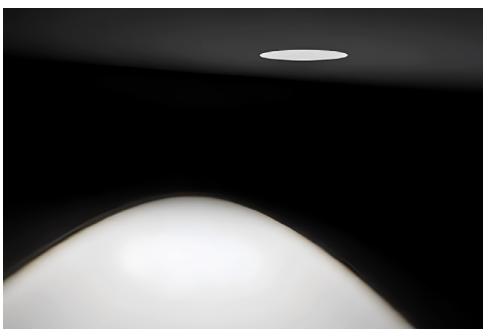



PROJECT: ESTUDI ARQUITECTURA INTERIOR MAITE PRATS / PHOTO: MARC TORRA




PROJECT: ESTUDI ARQUITECTURA INTERIOR MAITE PRATS / PHOTO: MARC TORRA

# Lenis GU10

10800



GOOD NIGHT

Recessed



Gypsum material  
Paintable

<b>Installation</b>	Indoor	<b>CRI</b>	GU10
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	GU10
<b>IP</b>	20	<b>Cut-out Size</b>	125x125 h130mm
<b>Wattage</b>	GU10	<b>Dimensions</b>	120x120 h121mm Ø56mm
<b>Lumen Output</b>	GU10	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Depending on lamp		



10800.GU10.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10800	GU10	XX	XX	○ 10 White	Depending on lamp



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Big Lenis

10801

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

Gypsum material  
Paintable

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	30.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø335 h100mm
<b>Wattage</b>	18W	<b>Dimensions</b>	Ø330 h97mm
<b>Lumen Output</b>	1300	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)		

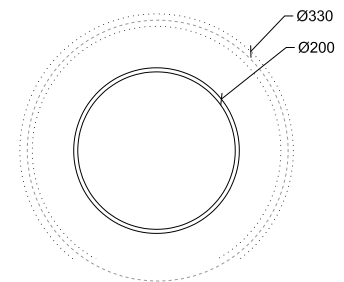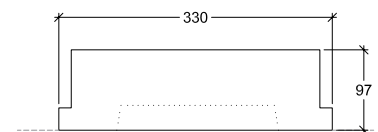

10801.22.30.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10801	22	30 3000	6 Opal 120°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request



PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Arus GU10

10022



GOOD NIGHT

Recessed



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	Ø80-85 h110mm
<b>Dimensions</b>	Ø95 h100mm
<b>Adjustable</b>	Yes



10022.GU10.XX.X.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10022	GU10	XX Depending on lamp	XX Depending on lamp	○ 10 White ● 20 Black	Depending on lamp



MAMS / PROJECT: SANDRA SOLER STUDIO / PHOTO: IVAN RAGA





# Big Ipsofacto f

10030

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE



CASAMBI




WIRELESS



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	44
<b>Driver</b>	Included remote
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>90
<b>Life Time</b>	40.000 h
<b>Adjustable</b>	No

<b>Wattage</b>	22W
<b>Lumen Output</b>	2100
<b>Connection</b>	500mA
<b>Dimensions</b>	Ø130 h97mm
<b>Cut-out size</b>	Ø120 h105mm



<b>Wattage</b>	30W
<b>Lumen Output</b>	3500
<b>Connection</b>	700mA
<b>Dimensions</b>	Ø160 h130mm
<b>Cut-out size</b>	Ø145 h140mm

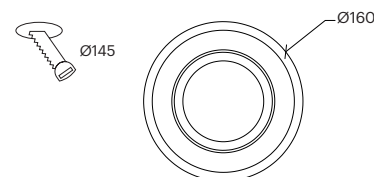

10030.\*\*.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10030	22	30 3000	1 Narrow 24°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
	30	40 4000	2 Medium 38°	● 20 Black	
			3 Wide 60°	● 40 Gold	



Superavit


10035

GOOD NIGHT

Recessed



<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø126 h130mm
<b>Wattage</b>	30W	<b>Dimensions</b>	Ø135 h114mm
<b>Lumen output</b>	2500	<b>Adjustable</b>	+/- 30° 358° Rotation
<b>Connection</b>	800mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)		

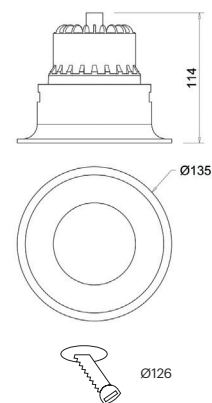

10035.30.\*\*.\*10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10035	30	27 2700	2 Medium 25°	○ 10 White	NDI* Included built-in non-dimmable
		30 3000	3 Wide 40°	● 20 Black	
		40 4000			



SIZE / PROJECT: MARTA BACQUELAINE



SIZE / PROJECT: MARTA BACQUELAINE



SIZE / PROJECT: MARTA BACQUELAINE

10110

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	22W
<b>Lumen output</b>	1800
<b>Connection</b>	700mA
<b>Driver</b>	Included remote
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>85
<b>Life Time</b>	30.000 h
<b>Cut-out Size</b>	Ø200 h50mm
<b>Dimensions</b>	Ø210 h36mm
<b>Adjustable</b>	No



10110.22.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10110	22	30 3000 40 4000	6 Opal 120°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request

Mergo

10112

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	30.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø150 h70mm
<b>Wattage</b>	30W	<b>Dimensions</b>	Ø160 h62mm
<b>Lumen output</b>	2400	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		



10112.30.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10112	30	30 3000 40 4000	6 Opal 120°	○ 10 White	NDI* Driver included (non-dimmable)

# Lacunar Trimless

10114

GOOD NIGHT

Recessed




INDOOR RECESSED



ALEXA, SIRI, GOOGLE DIMMABLE CASAMBI WIRELESS

Only for gypsum ceiling  
Other wattages and dimensions available upon request (30W and 40W)

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	30.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø300 h98mm
<b>Wattage</b>	20W	<b>Dimensions</b>	Ø286 h88mm
<b>Lumen output</b>	1350	<b>Adjustable</b>	Yes
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)		

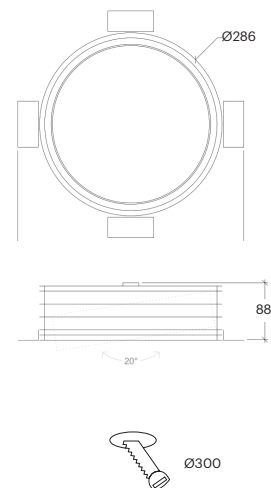

10114.20.\*\*.6.\*\*


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10114	20	30 3000		○ 10 White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	

# Rotundus-UGR<19

10105

GOOD NIGHT

Recessed

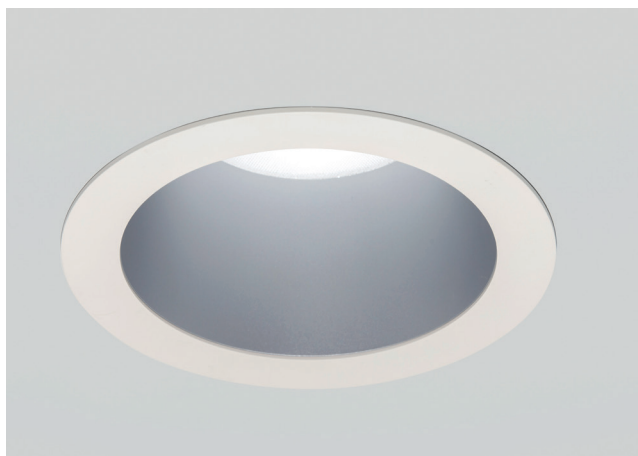

INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	25W
<b>Lumen output</b>	2500
<b>Connection</b>	600mA
<b>Driver</b>	Included remote
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)

<b>CRI</b>	>85
<b>Life Time</b>	40.000 h
<b>Cut-out Size</b>	Ø200 h140mm
<b>Dimensions</b>	Ø215 h120mm
<b>Adjustable</b>	No

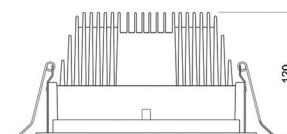

10105.25.\*\*.3.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10105	25	30 3000 40 4000	3 Wide 80°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request





# Savanna 60x60 UGR < 19

GOOD NIGHT


10160

Recessed / Surface / Suspended

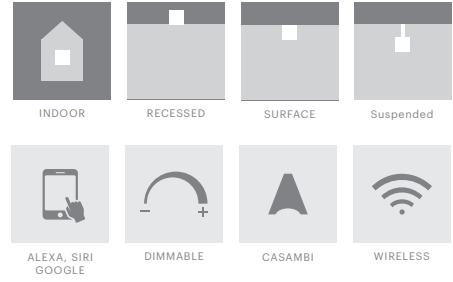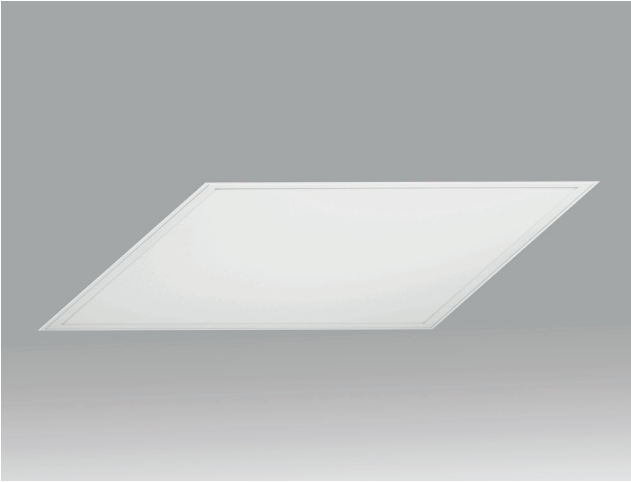

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	44
<b>Wattage</b>	36W
<b>Lumen output</b>	3500
<b>Connection</b>	230V
<b>Driver</b>	Included remote
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>80
<b>Life Time</b>	40.000 h
<b>Cut-out Size</b>	595x595 h40mm (technical ceiling)
<b>Dimensions</b>	595x595 h35mm

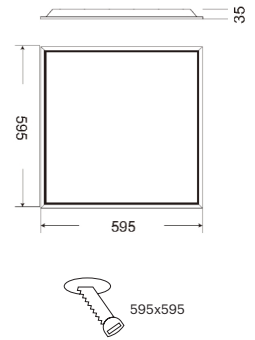

10160.36.\*\*.4.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10160	36	30 3000	4 Superwide 90°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000			
		50 5000			

## Accessory

- 10160.A.1 Surface mounting kit for Savanna 60x60
- 10160.A.2 Suspended mounting kit
- 10160.A.3 Recessing frame for Savanna 60x60
- 10160.A.4 Recessing brackets for Savanna





# Savanna 60x60 Opal


GOOD NIGHT

10160

Recessed / Surface / Suspended

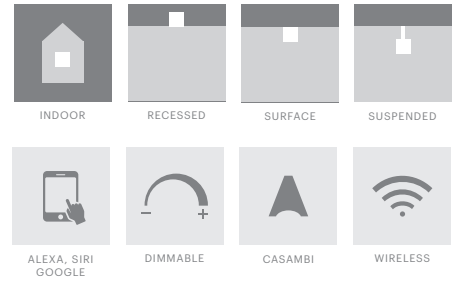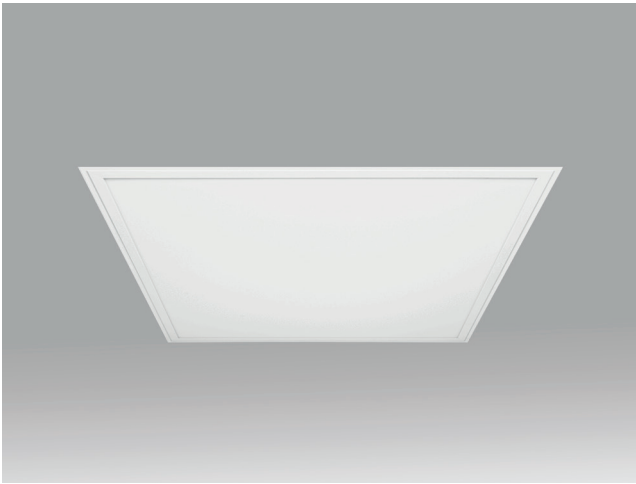

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Ceiling recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	595x595 h40mm (technical ceiling)
<b>Wattage</b>	36W	<b>Dimensions</b>	595x595 h35mm
<b>Lumen output</b>	3250		
<b>Connection</b>	230V		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)		

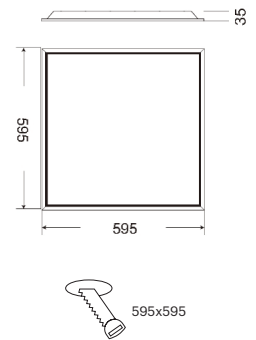

10160.36.\*\*.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10160	36	30 3000 40 4000 50 5000	6 Opal 120°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request

### Accessory



- 10160.A.1 Surface mounting kit for Savanna 60x60
- 10160.A.2 Suspended mounting kit
- 10160.A.3 Recessing frame for Savanna 60x60
- 10160.A.4 Recessing brackets for Savanna

# Savanna 120x30 Opal

GOOD NIGHT


10162

Recessed / Surface / Suspended

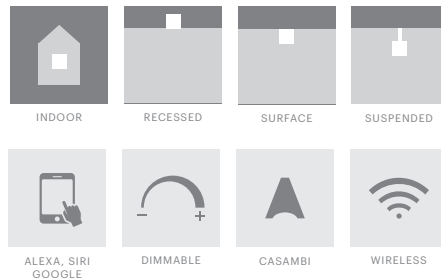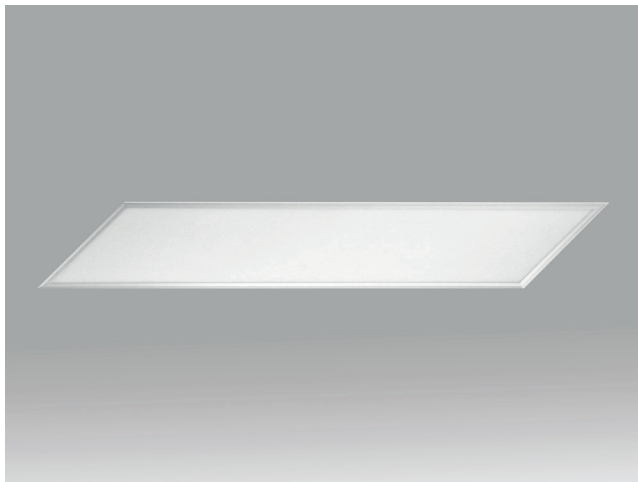

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling recessed
<b>IP</b>	20
<b>Wattage</b>	36W
<b>Lumen output</b>	3200
<b>Connection</b>	230V
<b>Driver</b>	Included remote
<b>Dimmable*</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>80
<b>Life Time</b>	40.000 h
<b>Cut-out Size</b>	295x1195 h40mm (technical ceiling)
<b>Dimensions</b>	295x1195 h35mm

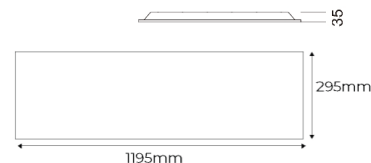

10162.36.\*\*.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10162	36	30 3000 40 4000 50 5000	6 Opal 120°	○ 10 White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request

### Accessory

- 10160.A.2 Suspended mounting kit for Savanna
- 10160.A.4 Recessing brackets for Savanna

# Mini Eclipsim



10702

GOOD NIGHT



Recessed



<b>Installation</b>	Indoor	<b>CRI</b>	>85
<b>Mounting Position</b>	Wall recessed	<b>Life Time</b>	30.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø35 h40mm
<b>Wattage</b>	3W	<b>Dimensions</b>	Ø40 h31mm
<b>Lumen output</b>	40	<b>Adjustable</b>	No
<b>Connection</b>	700mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	Non-dimmable		



10702.3.30.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10702	3	30 3000	 6 Opal	 10 White	NDI* Driver included (non-dimmable)



# Praetorium

10713

GOOD NIGHT

Recessed wall



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE




CASAMBI





WIRELESS

Only for cavity wall  
Gypsum material  
Paintable
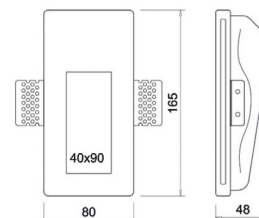
<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Wall recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	169x84 h52mm
<b>Wattage</b>	1W	<b>Dimensions</b>	165x80 h48mm
<b>Lumen output</b>	100	<b>Adjustable</b>	No
<b>Connection</b>	350mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	Non-dimmable		



10713.1.30.5.10


Number	W	Colour Temperature	Light Distribution	Finish	Dim
10713	1	30 3000	 5 Asymetric	 10 White	NDI* Driver included (non-dimmable)

Lacrima

36000


GOOD NIGHT

Recessed wall



Only for cavity wall  
Gypsum material  
Paintable

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Wall recessed	<b>Life Time</b>	30.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	320x105 h45mm
<b>Wattage</b>	1W	<b>Dimensions</b>	210x50mm
<b>Lumen output</b>	100	<b>Adjustable</b>	No
<b>Connection</b>	350mA		
<b>Driver</b>	Included remote		
<b>Dimmable*</b>	Non-dimmable		

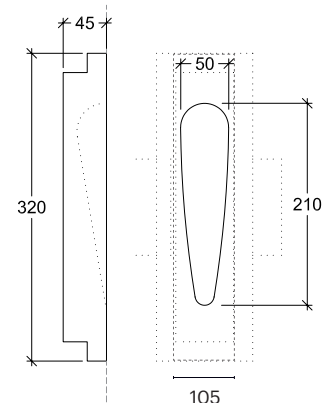

36000.1.30.5.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
36000	1	30 3000	5 Asymetric	10 White	NDI* Driver included (non-dimmable)




Tellus


10705

GOOD NIGHT


Recessed wall

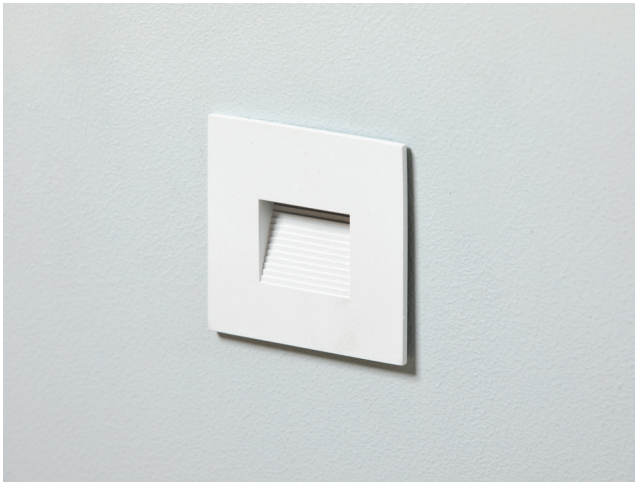

<b>Installation</b>	Indoor	<b>CRI</b>	>85
<b>Mounting Position</b>	Wall recessed	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	Ø68 h40mm
<b>Wattage</b>	3W	<b>Dimensions</b>	74x74 h38mm
<b>Lumen output</b>	50	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		



10705.3.27.5.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10705	3	27 2700	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Scala

75005




GOOD NIGHT

Recessed wall





<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Wall recessed
<b>IP</b>	20
<b>Wattage</b>	1W
<b>Lumen output</b>	100
<b>Connection</b>	230VA
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>90
<b>Life Time</b>	20.000 h
<b>Cut-out Size</b>	Ø61 h50mm (with recessing box) Ø50 h30mm (without recessing box)
<b>Dimensions</b>	Ø58 h25mm
<b>Adjustable</b>	No



70005.1.30.5.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70005	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Recessing box included

Oculus


75006

GOOD NIGHT


Recessed wall



Installation	Indoor / Outdoor	CRI	>80
Mounting Position	Wall recessed	Life Time	30.000 h
IP	65	Cut-out Size	Ø75 h38mm
Wattage	2W	Dimensions	Ø80 h38mm
Lumen output	120	Adjustable	No
Connection	230VA		
Driver	Included built-in		
Dimmable*	Non-dimmable		

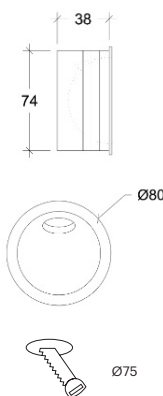

70006.1.30.5.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70006	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)



Supplied with 200cm cable




Signum

70702


GOOD NIGHT

Recessed wall




Installation	Indoor / Outdoor
Mounting Position	Wall recessed
IP	65
Wattage	1,5W
Lumen output	170
Connection	230VA
Driver	Included built-in
Dimmable*	Non-dimmable

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø68 h71mm
Dimensions	Ø75 h53mm
Adjustable	No

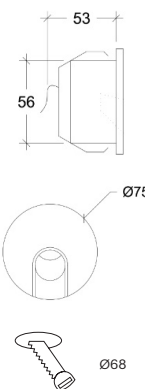


70702.1.\*\*.\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70702	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)



Supplied with 200cm cable  
Recessing box included

Surface / Suspended

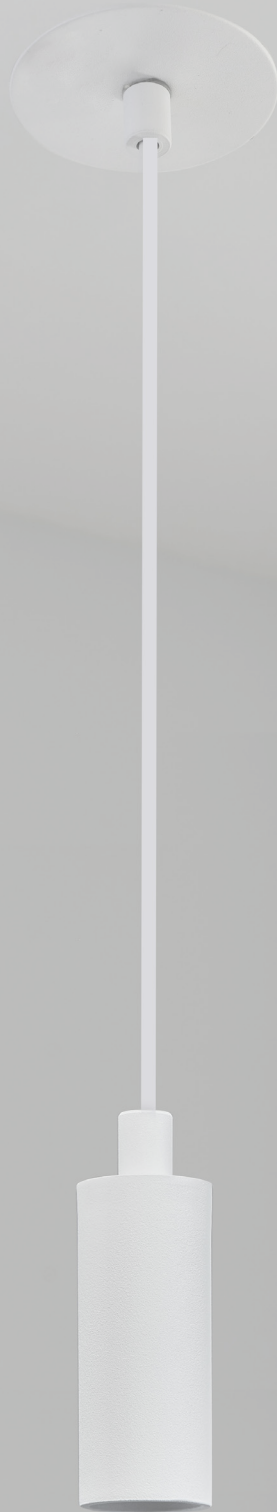

Surface / Suspended

- 132 Pictus Cylinder suspended
- 133 Fluctus 130 Cylinder Surface
- 134 Fluctus 170 Cylinder Surface
- 135 Fluctus 130 Cylinder Suspended
- 136 Fluctus 170 Cylinder Suspended
- 138 Aqualis-65
- 139 Aqualis-85
- 140 Audere Cylinder Surface
- 141 Audere Cylinder Suspended
- 142 Canalis T230 Surface
- 143 Canalis GU10 Surface
- 144 Canalis T230 suspended
- 145 Canalis GU10 Suspended
- 146 Speculum
- 148 Buto 35
- 150 Lunis
- 152 Lunis Twin
- 154 Bitubus 100 Surface
- 156 Bitubus 100 suspended
- 157 QX
- 158 Linestrum 30.1
- 160 Linestrum 30.2
- 161 Linestrum 50.1
- 162 Linestrum 50.2
- 163 Linestrum 100.2
- 164 Porcellanatum Basic
- 165 Porcellanatum Basic Switch
- 166 Purus

# Pictus Cylinder Suspended


35077

GOOD NIGHT


Suspended



Standard: surface mounted canopy

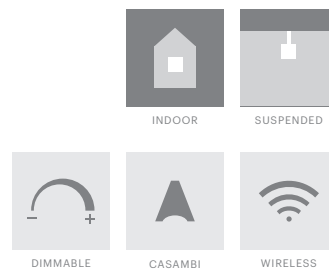


<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Suspended	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W	<b>Dimensions</b>	Ø35 h120mm
<b>Lumen output</b>	665	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable *Dimmable drivers upon request		

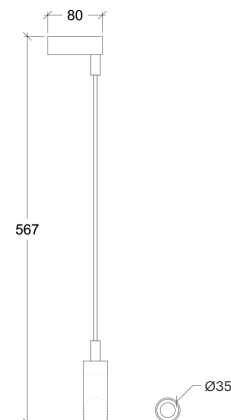

35077.5.\*\*.\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35077	5	27 2700	1 Narrow 20°	○ 10 White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 38°	● 20 Black	
		40 4000	3 Wide 50°	● 30 Aluminium	
				● 40 Gold	
				● A0 Corten	
				● B0 Copper	

Other finishes available upon request




Recessed canopy on request

# Fluctus 130 Cylinder Surface

30067


GOOD NIGHT

Surface



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>IP</b>	20
<b>Wattage</b>	5W 8,6W
<b>Lumen output</b>	790 1200
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø56 h128mm
<b>Adjustable</b>	No

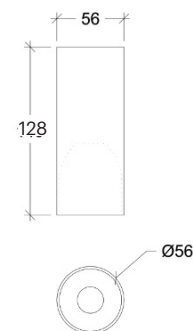

30067.\*.\*.\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30067	5	27 2700	1 Narrow 14°	○ 10 White	NDI* Driver included (non-dimmable)
		30 3000	2 Medium 25°	● 20 Black	
	9	40 4000	3 Wide 40°	● 30 Aluminium	
			4 Superwide 60°	● 40 Gold	
				● A0 Corten	
				● B0 Copper	

Other finishes available upon request




# Fluctus 170 Cylinder Surface


30068

GOOD NIGHT

Surface




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W 8,6W	<b>Dimensions</b>	Ø56 h168mm
<b>Lumen output</b>	790 1200	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Phase Dim		

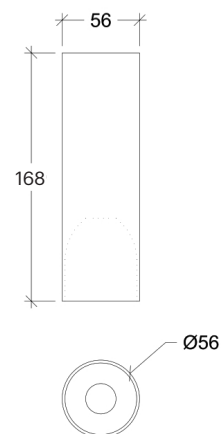

30068.\*\*\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30068	5	27 2700	1 Narrow 14°	10 White	DTR Phase Dim
		30 3000	2 Medium 25°	20 Black	
	9	40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
			A0 Corten		
			B0 Copper		

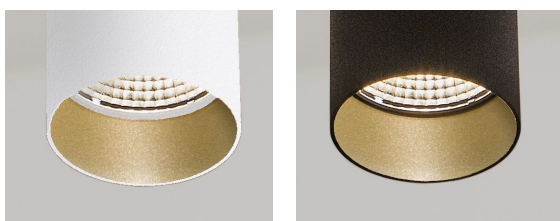

Other finishes are available upon request for the external body and the internal ring

# Fluctus 130 Cylinder Suspended


35067

GOOD NIGHT

Suspended




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Suspended	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W 8,6W	<b>Dimensions</b>	Ø56 h128 mm
<b>Lumen output</b>	700 1200	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable *Dimmable drivers upon request		

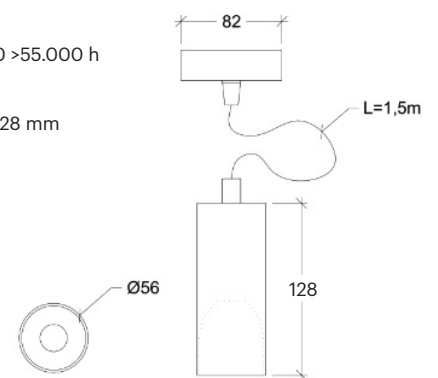


35067.\*.\*.\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35067	5	27 2700	1 Narrow 14°	10 White	NDI* Driver included (non-dimmable)
	9	30 3000	2 Medium 25°	20 Black	
		40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
				A0 Corten	
				B0 Copper	

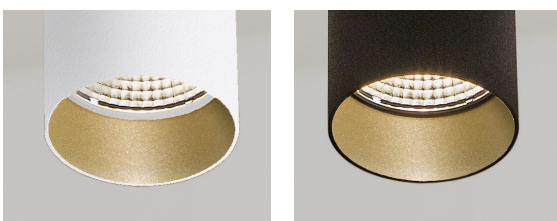

Other finishes are available upon request for the external body and the internal ring

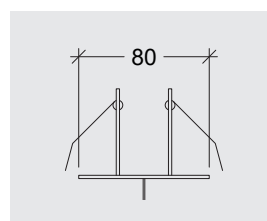

Recessed canopy on request



# Fluctus 170 Cylinder Suspended

35068


GOOD NIGHT

Suspended




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Suspended
<b>IP</b>	20
<b>Wattage</b>	5W 8,6W
<b>Lumen output</b>	700 1200
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø56 h168mm
<b>Adjustable</b>	No

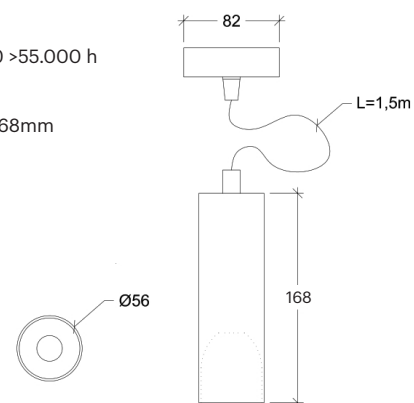


35068.\*.\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35067	5	27 2700	1 Narrow 14°	10 White	DTR
		30 3000	2 Medium 25°	20 Black	
	9	40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
				A0 Corten	
				B0 Copper	

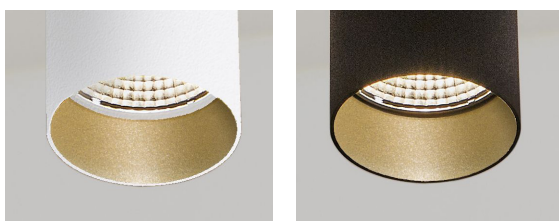

Other finishes are available upon request for the external body and the internal ring

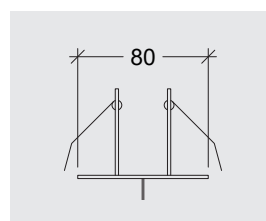

Recessed canopy on request







MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA

# Aqualis-65


30065

GOOD NIGHT

Surface



<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	40.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	8W	<b>Dimensions</b>	Ø65 h157mm
<b>Lumen output</b>	580	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Non-dimmable		

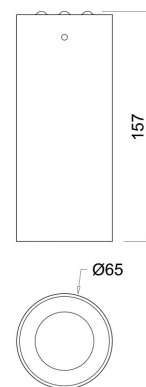

30065.8.27.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30065	8	27 2700	1 Narrow 25°	⊙ 11 White & White	NDI Driver included (non-dimmable)
			2 Medium 40°	⦿ 12 White & Black	
			4 Superwide 60°	⦿ 14 White & Gold	
			● 21 Black & White		
				● 22 Black & Black	
				● 24 Black & Gold	



# Aqualis-85

30085


GOOD NIGHT

Surface / Suspended



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface, Suspended
<b>IP</b>	20
<b>Wattage</b>	20W
<b>Lumen output</b>	1450
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Non-dimmable

<b>CRI</b>	>90
<b>Life Time</b>	40.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø85 h154mm
<b>Adjustable</b>	No

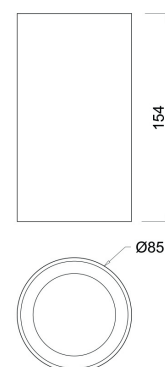

30085.20.30.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30085	20	30 3000	1 Narrow 15°	⊙ 11 White & White	NDI Driver included (non-dimmable)
			2 Medium 25°	⦿ 12 White & Black	
			3 Wide 40°	⦿ 14 White & Gold	
				● 21 Black & White	
				⦿ 22 Black & Black	
				● 24 Black & Gold	




- 30085.A.2.10 Aqualis-85-Suspended set ○
- 30085.A.2.20 Aqualis-85-Suspended set ●

# Audere Cylinder Surface


30079

GOOD NIGHT

Surface

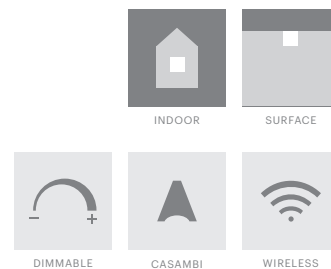


<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	20W	<b>Dimensions</b>	Ø80 h142mm
<b>Lumen output</b>	2600	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable *Dimmable drivers upon request		

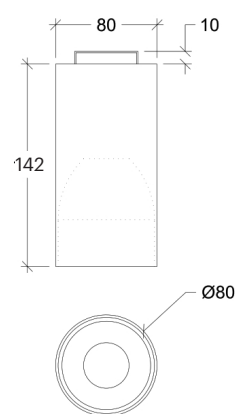

30079.20.\*\*.\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30079	20	27 2700	1 Narrow 14°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°	20 Black	
		40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
				A0 Corten	
				B0 Copper	

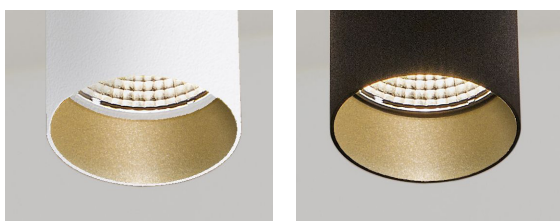

Other finishes are available upon request for the external body and the internal ring

# Audere Cylinder Suspended


35079

GOOD NIGHT

Suspended




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Suspended	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	20W	<b>Dimensions</b>	Ø80 h142mm
<b>Lumen output</b>	2600	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable *Dimmable drivers upon request		

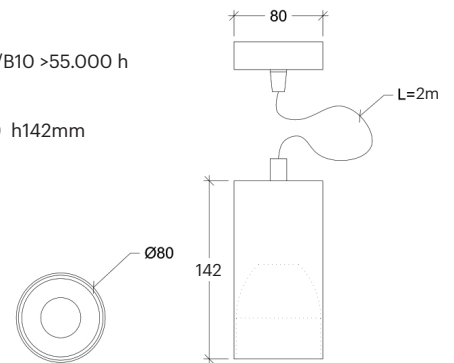


35079.20.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35079	20	27 2700	1 Narrow 14°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		30 3000	2 Medium 25°	20 Black	
		40 4000	3 Wide 40°	30 Aluminium	
			4 Superwide 60°	40 Gold	
				A0 Corten	
				B0 Copper	

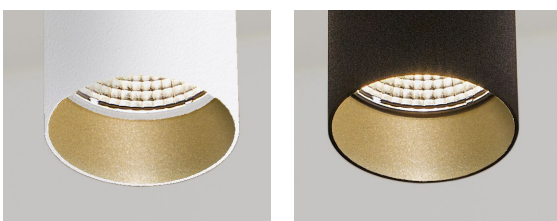

Other finishes are available upon request for the external body and the internal ring

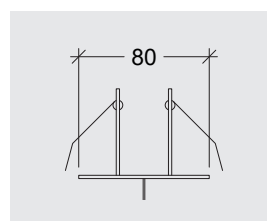

Recessed canopy on request



# Canalis T230 Surface

30070

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	L80/B10 >25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	10W	<b>Dimensions</b>	Ø90 h140mm
<b>Lumen output</b>	675	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Phase Dim		

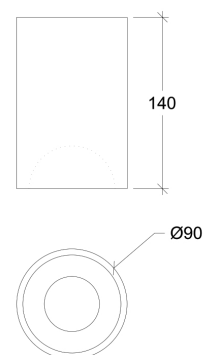

30070.10.\*\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30070	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase Dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	⦿ 22 Black & Black	
				● 24 Black & Gold	



# Canalis GU10 Surface

30070

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>IP</b>	20
<b>Wattage</b>	GU10
<b>Lumen output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø90 h140mm
<b>Adjustable</b>	No



30070.GU10.XX.X.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30070	GU10	X	X	<ul style="list-style-type: none"> <li>☉ 11 White &amp; White</li> <li>● 14 White &amp; Gold</li> <li>● 22 Black &amp; Black</li> <li>● 24 Black &amp; Gold</li> </ul> <p>Other finishes available upon request</p>	Depending on lamp



# Canalis T230 Suspended

35070

GOOD NIGHT

Suspended



INDOOR SUSPENDED



DIMMABLE




CASAMBI



WIRELESS


Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	10W
Lumen output	675
Connection	230V
Driver	Included
Dimmable	Phase Dim

CRI	>90
Life Time	L80/B10 >25.000 h
Cut-out Size	-
Dimensions	Ø90 h140mm
Adjustable	No

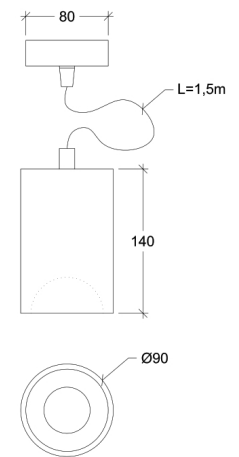

35070.10.\*\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35070	10	27 2700	1 Narrow 12°	⊙ 11 White & White	DTR Phase Dim
		30 3000	2 Medium 24°	⦿ 14 White & Gold	
		40 4000	3 Wide 36°	● 22 Black & Black ● 24 Black & Gold	
Other finishes available upon request					

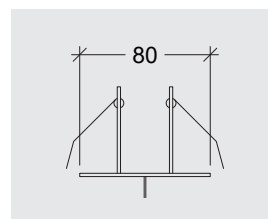

Recessed canopy on request



# Canalis GU10 Suspended

35070


GOOD NIGHT

Suspended




Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø90 h140mm
Adjustable	No

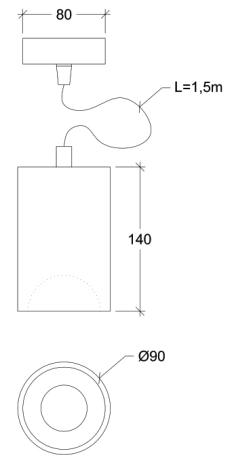

35070.GU10.XX.X.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35070	GU10	X	X	<ul style="list-style-type: none"> <li>☉ 11 White &amp; White</li> <li>☉ 14 White &amp; Gold</li> <li>● 22 Black &amp; Black</li> <li>● 24 Black &amp; Gold</li> </ul> <p>Other finishes available upon request</p>	Depending on lamp

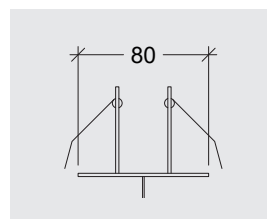

Recessed canopy on request

# Speculum

30090

GOOD NIGHT



Surface




<b>Installation</b>	Indoor	<b>CRI</b>	>85
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	44	<b>Cut-out Size</b>	-
<b>Wattage</b>	18W	<b>Dimensions</b>	L900 A40 h58mm
<b>Lumen output</b>	1000	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included		
<b>Dimmable</b>	Non-dimmable		




30090.18.27.6.70


Number	W	Colour Temperature	Light Distribution	Finish	Dim
30090	18	27 2700	 6 Opal	 70 Chrome	<b>NDI</b> Driver included (non-dimmable) Dimmable driver upon request

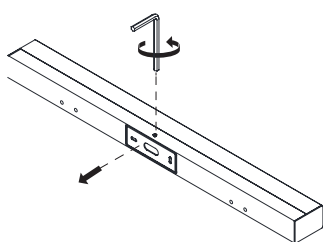

Wall fixation (included)

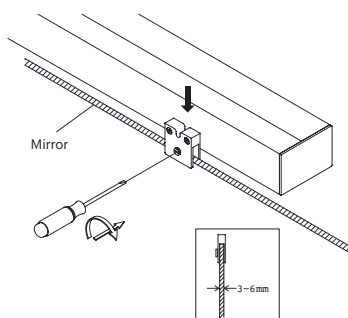

Mirror fixation (included)

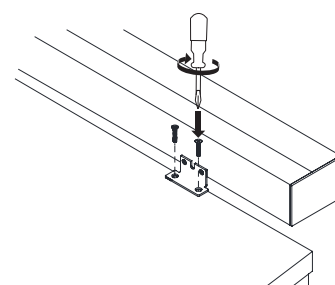

Furniture fixation (included)




PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCÉ GOST PHOTO

Buto 35


30135

GOOD NIGHT

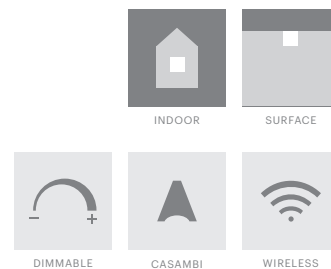

Surface

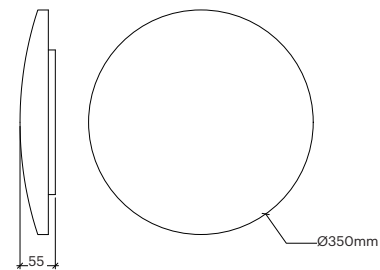

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	35.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	18W	<b>Dimensions</b>	Ø350 h55mm
<b>Lumen output</b>	1600	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Phase Dim		



30135.18.\*\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30135	18	30 3000	 6 Opal	 10 White	DTR Phase Dim





Lunis

30110

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE




CASAMBI




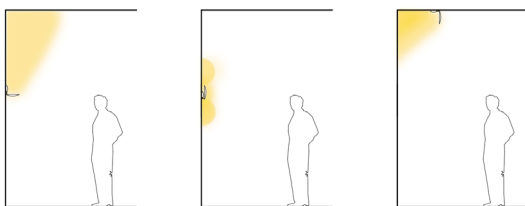
WIRELESS


<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	35.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	15W	<b>Dimensions</b>	Ø205 h70mm
<b>Lumen output</b>	1600	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		

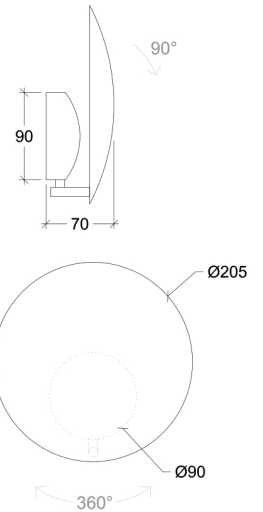

30110.15..\*\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30110	15	27 2700 30 3000	 4 Superwide	<i>Exterior &amp; Interior</i> ☉ 11 White & White ● 22 Black & Black ● 32 Aluminium & Black ● 42 Gold & Black ● A2 Corten & White ● B2 Copper & Black  Other finishes available upon request	DTR Phase Dim



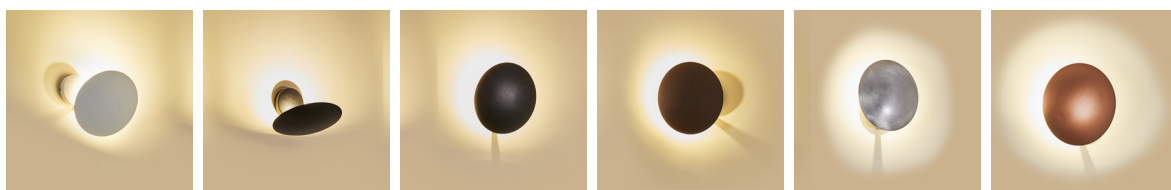


# Lunis Twin



30111

GOOD NIGHT

Surface




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	35.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	2x15W	<b>Dimensions</b>	Ø205x2 h145mm
<b>Lumen output</b>	2x1600	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Phase Dim		

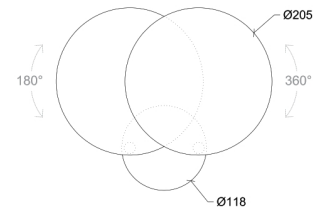

30111.30.\*\*.\*.\*\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30111	15	27 2700 30 3000	4 Superwide	<i>Exterior &amp; Interior</i> ☉ 11 White & White ● 22 Black & Black ● 32 Aluminium & Black ● 42 Gold & Black ● A2 Corten & White ● B2 Copper & Black  Other finishes available upon request	DTR Phase Dim

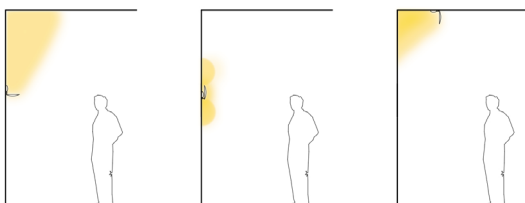





# Bitubus 100 Surface

30136

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE





CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>IP</b>	20
<b>Wattage</b>	2x15W
<b>Lumen output</b>	2x700
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable *Dimmable drivers upon request

<b>CRI</b>	>90
<b>Life Time</b>	35.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	1160x140 h90mm
<b>Adjustable</b>	No

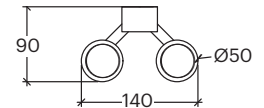

30136...\*\*.\*\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30136	30	24 2400		10 White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request
		27 2700		20 Black	
		30 3000		30 Aluminium	
		40 4000		40 Gold	
				A0 Corten	
	B0 Copper				

Other dimensions and wattages available upon request



# Bitubus 100 Suspended

35136



GOOD NIGHT

Suspended



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Suspended
<b>IP</b>	20
<b>Wattage</b>	2x15W
<b>Lumen output</b>	2x700
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable *Dimmable drivers upon request

<b>CRI</b>	>90
<b>Life Time</b>	35.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	1160x140 h90mm
<b>Adjustable</b>	No

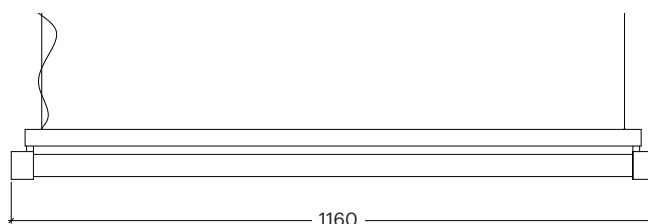

35136...\*\*.\*\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
35136	30	24 2400	6 Opal 120°	○ 10 White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request
		27 2700		● 20 Black	
		30 3000		● 30 Aluminium	
		40 4000		● 40 Gold	
				● A0 Corten	
	● B0 Copper				

Other dimensions and wattages available upon request

QX



30071

GOOD NIGHT

Surface




<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	3W + 3W	<b>Dimensions</b>	100x100 h110mm
<b>Lumen output</b>	600	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Non-dimmable		



30071.6.30.X. \*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30071	6	30 3000	X 0° a 120°	<i>Exterior &amp; Interior</i> ◎ 11 White & White ● 26 Black & Dark Grey ○ 31 Aluminium & White ● 41 Gold & White ◎ 66 Dark Grey & Dark grey ● A1 Corten & White ● B1 Copper & White RO RAL Chart	NDI Driver included (non-dimmable)

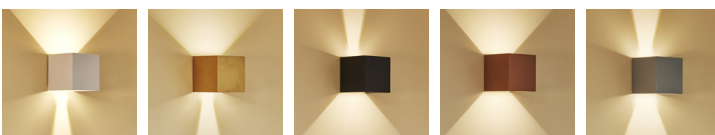

# Linestrum 30.1


30072

GOOD NIGHT

Surface



<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W	<b>Dimensions</b>	300x40 h71mm
<b>Lumen output</b>	400	<b>Adjustable</b>	
<b>Connection</b>	230V		
<b>Driver</b>	Included		
<b>Dimmable</b>	Non-dimmable		

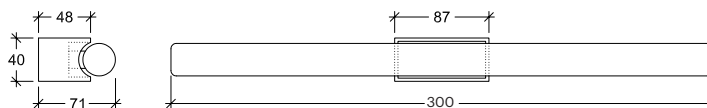

30072.5.27.6.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30072	5	27 2700	6 Opal	<ul style="list-style-type: none"> <li> 10 White</li> <li> 20 Black</li> <li> 30 Aluminium</li> <li> 40 Gold</li> <li> A0 Corten</li> <li> B0 Copper</li> </ul>	NDI Driver included non-dimmable)



# Linestrum 30.2


30073

GOOD NIGHT

Surface



<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W	<b>Dimensions</b>	307x40 h71mm
<b>Lumen output</b>	400	<b>Adjustable</b>	
<b>Connection</b>	230V		
<b>Driver</b>	Included		
<b>Dimmable</b>	Non-dimmable		

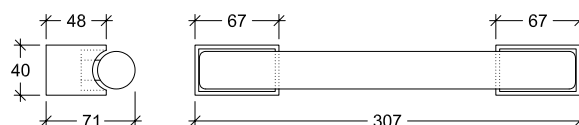

30073.5.276.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30073	5	27 2700	6 Opal	<ul style="list-style-type: none"> <li><input type="radio"/> 10 White</li> <li><input type="radio"/> 20 Black</li> <li><input type="radio"/> 30 Aluminium</li> <li><input type="radio"/> A0 Corten</li> <li><input type="radio"/> B0 Copper</li> <li><input type="radio"/> M0 Metallic Copper</li> <li><input type="radio"/> N0 Metallic Gold</li> <li><input type="radio"/> P0 Metallic Chrome</li> </ul>	NDI Driver included (non-dimmable)





# Linestrum 50.1


30074

GOOD NIGHT


Surface



<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	8W	<b>Dimensions</b>	500x40 h71mm
<b>Lumen output</b>	700	<b>Adjustable</b>	
<b>Connection</b>	230V		
<b>Driver</b>	Included		
<b>Dimmable</b>	Non-dimmable		

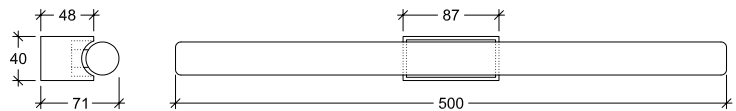

30074.8.27.6.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30074	8	27 2700	 6 Opal	<ul style="list-style-type: none"> <li><input type="radio"/> 10 White</li> <li><input checked="" type="radio"/> 20 Black</li> <li><input type="radio"/> 30 Aluminium</li> <li><input type="radio"/> A0 Corten</li> <li><input type="radio"/> B0 Copper</li> <li><input type="radio"/> M0 Metallic Copper</li> <li><input type="radio"/> N0 Metallic Gold</li> <li><input type="radio"/> P0 Metallic Chrome</li> </ul>	NDI Driver included (non-dimmable)




# Linestrum 50.2


30075

GOOD NIGHT

Surface

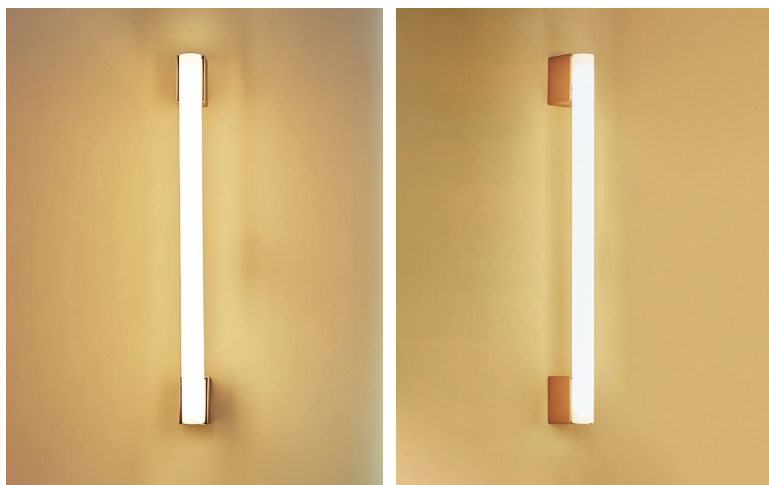

<b>Installation</b>	Indoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	25.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	8W	<b>Dimensions</b>	507x40 h71mm
<b>Lumen output</b>	700	<b>Adjustable</b>	
<b>Connection</b>	230V		
<b>Driver</b>	Included		
<b>Dimmable</b>	Non-dimmable		

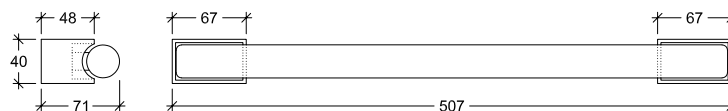

30075.8.27.6.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30075	8	27 2700	6 Opal	<ul style="list-style-type: none"> <li><input type="radio"/> 10 White</li> <li><input type="radio"/> 20 Black</li> <li><input type="radio"/> 30 Aluminium</li> <li><input type="radio"/> A0 Corten</li> <li><input type="radio"/> B0 Copper</li> <li><input type="radio"/> M0 Metallic Copper</li> <li><input type="radio"/> N0 Metallic Gold</li> <li><input type="radio"/> P0 Metallic Chrome</li> </ul>	NDI Driver included (non-dimmable)





# Linestrum 100.2


30076

GOOD NIGHT

Surface

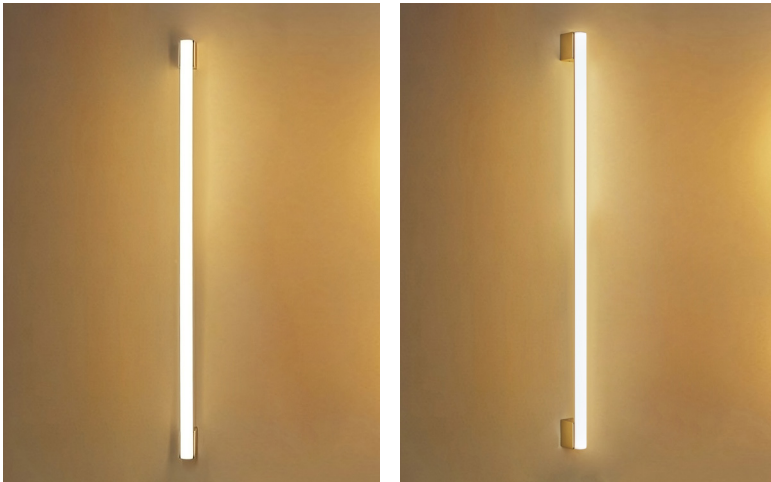

Installation	Indoor	CRI	>80
Mounting Position	Surface	Life Time	25.000 h
IP	20	Cut-out Size	-
Wattage	15W	Dimensions	1007x40 h71mm
Lumen output	1500	Adjustable	
Connection	230V		
Driver	Included		
Dimmable	Non-dimmable		

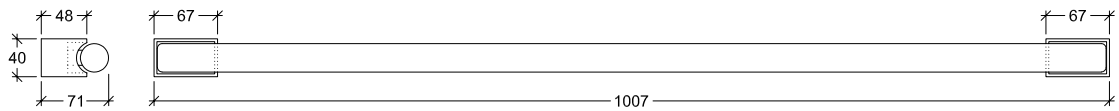

30076.15.27.6.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30076	15	27 2700	6 Opal	<ul style="list-style-type: none"> <li><input type="radio"/> 10 White</li> <li><input type="radio"/> 20 Black</li> <li><input type="radio"/> 30 Aluminium</li> <li><input type="radio"/> A0 Corten</li> <li><input type="radio"/> B0 Copper</li> <li><input type="radio"/> M0 Metallic Copper</li> <li><input type="radio"/> N0 Metallic Gold</li> <li><input type="radio"/> P0 Metallic Chrome</li> </ul>	NDI Driver included (non-dimmable)




# Porcellanatum Basic

30080



GOOD NIGHT

Surface

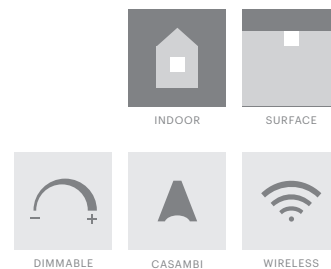

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>Material</b>	Porcelain
<b>IP</b>	20
<b>Wattage</b>	E27
<b>Lumen output</b>	E27
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	E27
<b>Life Time</b>	E27
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø65 h135mm
<b>Adjustable</b>	No

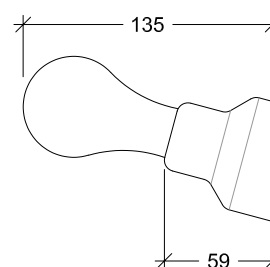

30080.E27.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30080	E27	XX Depending on lamp	X Depending on lamp	⊙ 11 White & White	Depending on lamp




# Porcellanatum Basic Switch

30081


GOOD NIGHT

Surface

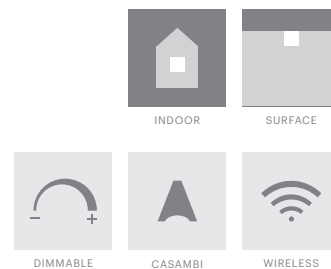

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>Material</b>	Porcelain
<b>IP</b>	20
<b>Wattage</b>	E27
<b>Lumen output</b>	E27
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	E27
<b>Life Time</b>	E27
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø70 h131mm
<b>Adjustable</b>	No

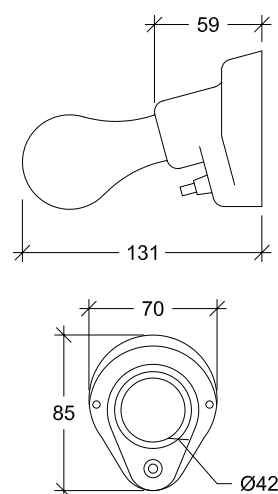

30081.E27.XX.X.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30081	E27	XX Depending on lamp	X Depending on lamp	⊙ 11 White & White	Depending on lamp




Purus

30088



GOOD NIGHT

Surface

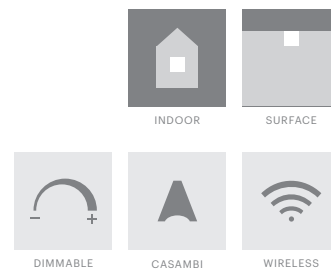

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>Material</b>	Aluminium
<b>IP</b>	20
<b>Wattage</b>	E27
<b>Lumen output</b>	E27
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	E27
<b>Life Time</b>	E27
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø98 h162mm
<b>Adjustable</b>	No

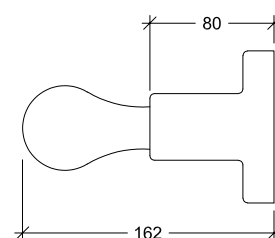

30088.E27X.XX.X.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30088	E27	XX Depending on lamp	X Depending on lamp	<ul style="list-style-type: none"> <li>○ 10 White</li> <li>● 20 Black</li> <li>● 30 Aluminium</li> <li>● 40 Gold</li> <li>● A0 Corten</li> <li>● B0 Copper</li> </ul>	Depending on lamp







Spots



Surface / Recessed

- 170 Pictus Base Surface
- 171 Pictus Base Recessed
- 172 Fluctus 130 Base Surface
- 174 Fluctus 170 Base Surface
- 175 Furtivus-Zoom Surface
- 176 Fluctus 130 Base Recessed
- 178 Audere Base Surface
- 179 Audere Base Recessed
- 180 Museum Plus Base Surface
- 182 Museum Plus Base Recessed

Track


- 184 Pictus Track
- 186 Fluctus 130Track
- 188 Fluctus 170 Track GU10
- 190 Furtivus-Zoom Track
- 191 Audere Track
- 194 Museum Plus Track
- 198 Ars
- 199 Elongatus tarck
- 200 Sabrolumo Track L600
- 202 Sabrolumo Track L1200
- 203 Sabrolumo Track L1500
- 204 Sabrolumo UGR Track L600
- 205 Sabrolumo UGR Track L1200
- 206 Sabrolumo UGR Track L1500
- 208 Tracks

# Pictus Base Surface

30084


GOOD NIGHT

Surface

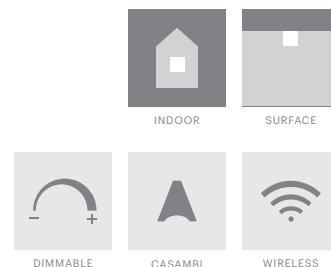

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling surface
<b>IP</b>	20
<b>Wattage</b>	5W
<b>Lumen output</b>	665
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Non-dimmable

<b>CRI</b>	90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø35 h135mm
<b>Adjustable</b>	Yes

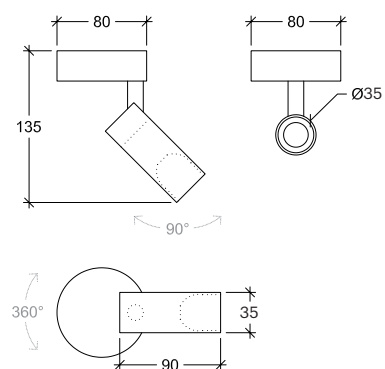

30084.5.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30084	5	27 2700	1 Narrow 20°	○ 10 White	NDI Driver included (non-dimmable)
		30 3000	2 Medium 38°	● 20 Black	
		40 4000	3 Wide 50°	● 30 Aluminium	
				● 40 Gold	
				● AO Corten	
				● BO Copper	

Other finishes available upon request



# Pictus Base Recessed

10036

GOOD NIGHT

Recessed



INDOOR

RECESSED



ALEXA, SIRI  
GOOGLE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Ceiling surface
<b>IP</b>	20
<b>Wattage</b>	5W
<b>Lumen Output</b>	665
<b>Connection</b>	200mA
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	Ø60 h60mm
<b>Dimensions</b>	Ø35 h108mm
<b>Adjustable</b>	Yes

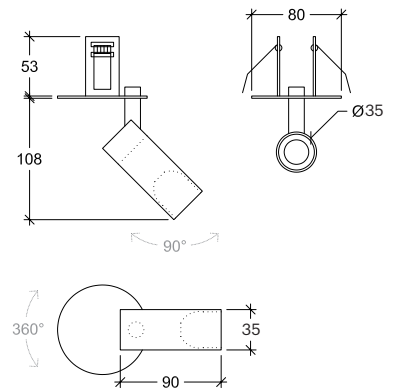

10036.5.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10036	5	27 2700	1 Narrow 20°	○ 10 White	XXX Driver not included (See drivers section)
		30 3000	2 Medium 38°	● 20 Black	
		40 4000	3 Wide 50°	● 30 Aluminium	
				● 40 Gold	
				● A0 Corten	
				● B0 Copper	

Other finishes available upon request




# Fluctus 130 Base Surface


30094

GOOD NIGHT

Surface




<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W      8,6W	<b>Dimensions</b>	Ø56 h128mm
<b>Lumen output</b>	700      1200	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Non-dimmable		

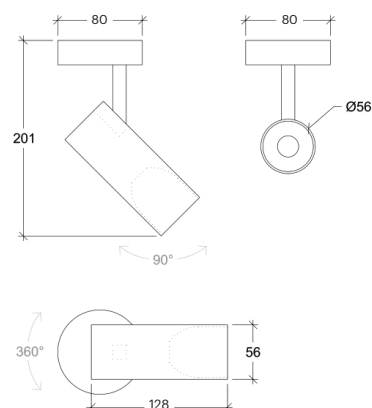

30094.9.\*\*.\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30094	5	27 2700	1 Narrow 14°	○ 10 White ● 20 Black	NDI Driver included (non-dimmable)
		30 3000	2 Medium 25°		
	9	40 4000	3 Wide 40°	Other finishes available upon request	
			4 Superwide 60°		

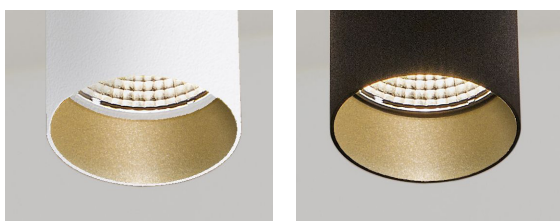

Other finishes are available upon request for the external body and the internal ring




PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Fluctus 170 Base Surface


30095

GOOD NIGHT

Surface

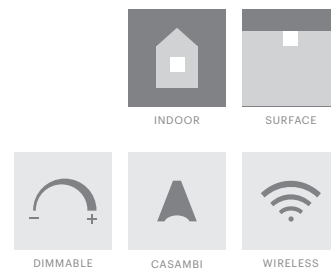


<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Surface	<b>Life Time</b>	L80/B10 >55.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W    8,6W	<b>Dimensions</b>	Ø56 h168mm
<b>Lumen output</b>	700    1200	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Phase Dim		

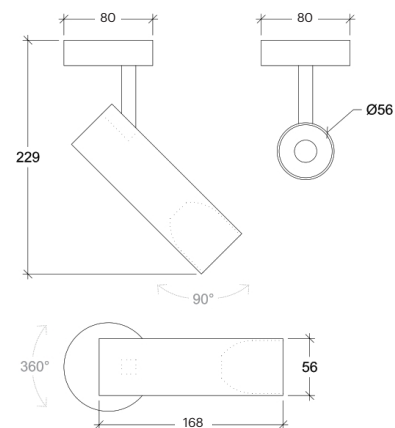

30095.9.\*\*.\*.DTR

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30095	5	27 2700	1 Narrow 14°	○ 10 White	DTR Phase Dim
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
		4 Superwide 60°			

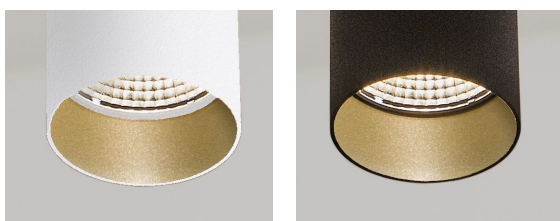

Other finishes are available upon request for the external body and the internal ring

# Furtivus-Zoom Surface

30007

GOOD NIGHT

Surface



INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>IP</b>	20
<b>Wattage</b>	12W
<b>Lumen output</b>	700
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>90
<b>Life Time</b>	30.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø60 h165mm
<b>Adjustable</b>	Yes

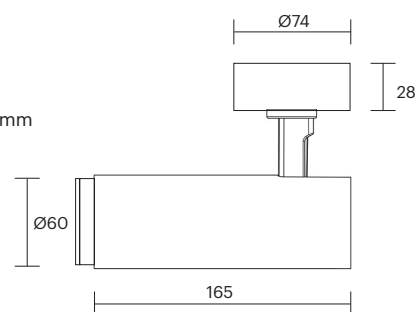

30007.12.27.9.\*\*


Number	W	Colour Temperature	Light Distribution	Finish	Dim
30007	12	27 2700	9 Zoom 9°-42°	○ 10 White ● 20 Black	DTR Phase Dim

# Fluctus 130 Base Recessed

10037


GOOD NIGHT

Recessed




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Recessed
<b>IP</b>	20
<b>Wattage</b>	5W    8,6W
<b>Lumen Output</b>	700    1200
<b>Connection</b>	150mA    250mA
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (dimmmable drivers on request)

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	Ø70mm h60mm
<b>Dimensions</b>	Ø56 h128mm
<b>Adjustable</b>	Yes

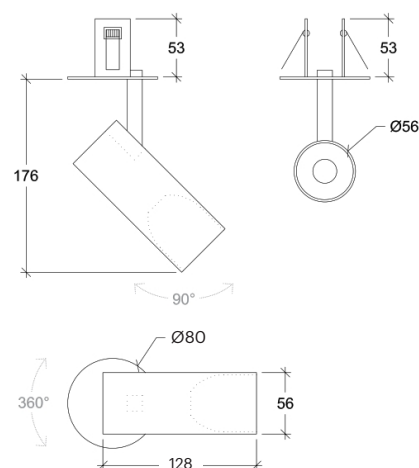

10037.\*.\*\*.\*.\*\*.XXX

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10037	5	27 2700	1 Narrow 14°	○ 10 White	XXX Driver not included (See drivers section)
	9	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
			4 Superwide 60°		

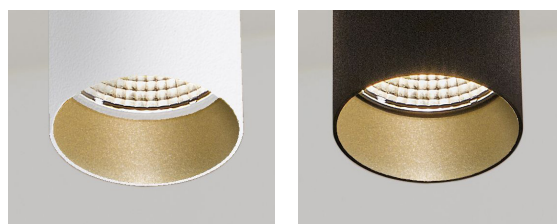

Other finishes are available upon request for the external body and the internal ring






PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Audere Base Surface

30096


GOOD NIGHT

Surface

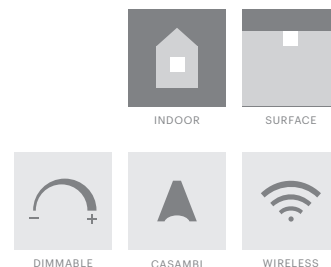


<b>Installation</b>	Indoor
<b>Mounting Position</b>	Surface
<b>IP</b>	20
<b>Wattage</b>	20W
<b>Lumen Output</b>	2600
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Non-dimmable (dimmable drivers upon request)

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø80 h142mm
<b>Adjustable</b>	Yes

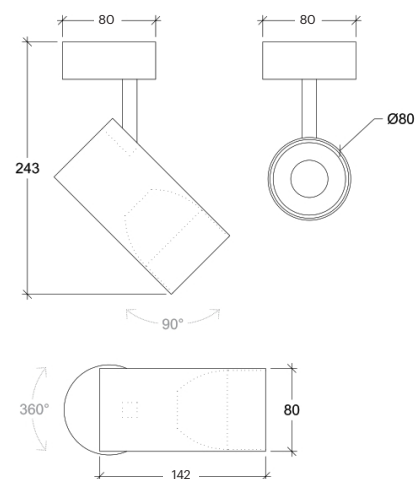

30096.20.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30096	20	27 2700	1 Narrow 14°	○ 10 White	NDI Driver included (non-dimmable) Dimmable drivers upon request
		30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
		4 Superwide 60°			

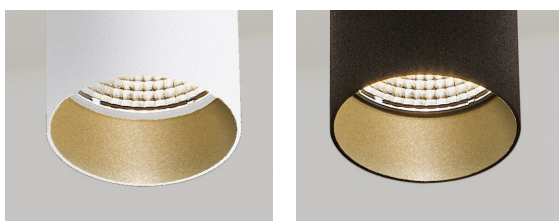


Other finishes are available upon request for the external body and the internal ring

# Audere Base Recessed

10038


GOOD NIGHT

Recessed




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Recessed
<b>IP</b>	20
<b>Wattage</b>	20W
<b>Lumen Output</b>	2600
<b>Connection</b>	600mA
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (dimmable drivers on request)

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	Ø70mm h60mm
<b>Dimensions</b>	Ø80 h142mm
<b>Adjustable</b>	Yes

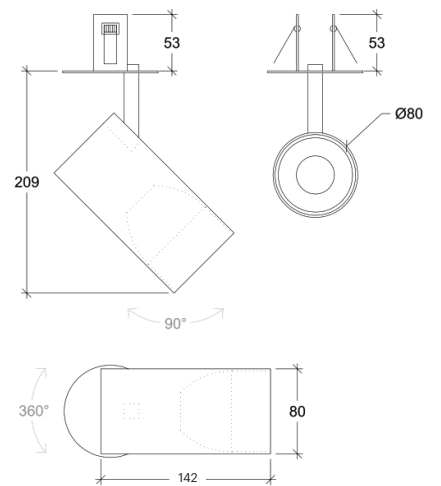

10038.20.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10038	20	27 2700	1 Narrow 14°	○ 10 White	XXX Driver not included (See drivers section)
		30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 40°	Other finishes available upon request	
		4 Superwide 60°			

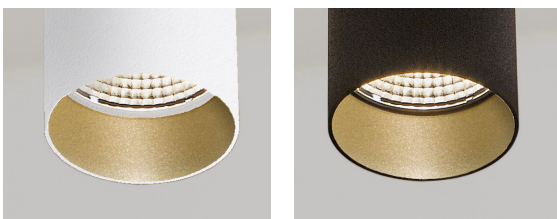


Other finishes are available upon request for the external body and the internal ring

# Museum Plus Base Surface

30097


GOOD NIGHT

Surface

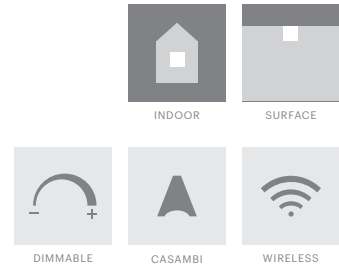


<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>Wattage</b>	12,3W 23,6W
<b>Lumen Output</b>	1600 3300
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Phase Dim

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø93 h90mm
<b>Adjustable</b>	Yes

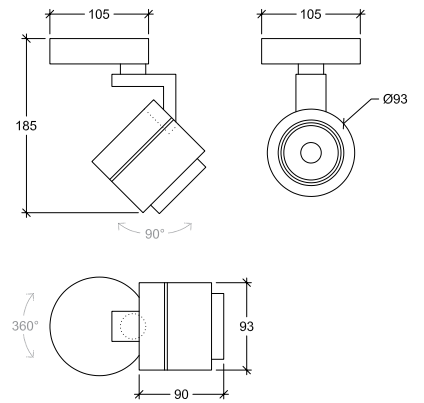

30097.\*\*.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
30097	12	27 2700	1 Narrow 12°	○ 10 White	DTR Phase Dim
	24	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 36°	Other finishes available upon request	

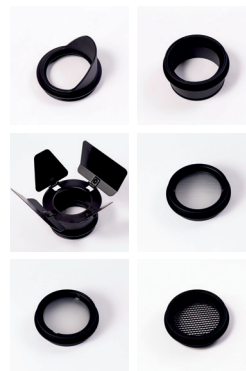


- 20022.A.1.20 Asymmetric cowl
- 20022.A.2.20 Symmetric cowl
- 20022.A.3.20 Barn doors
- 20022.A.4.20 Oval lens
- 20022.A.5.20 Spread lens
- 20022.A.6.20 Honeycomb Louvre

● Black



CREP NOVA / PROJECT: CARLOS MARTÍNEZ INTERIORS

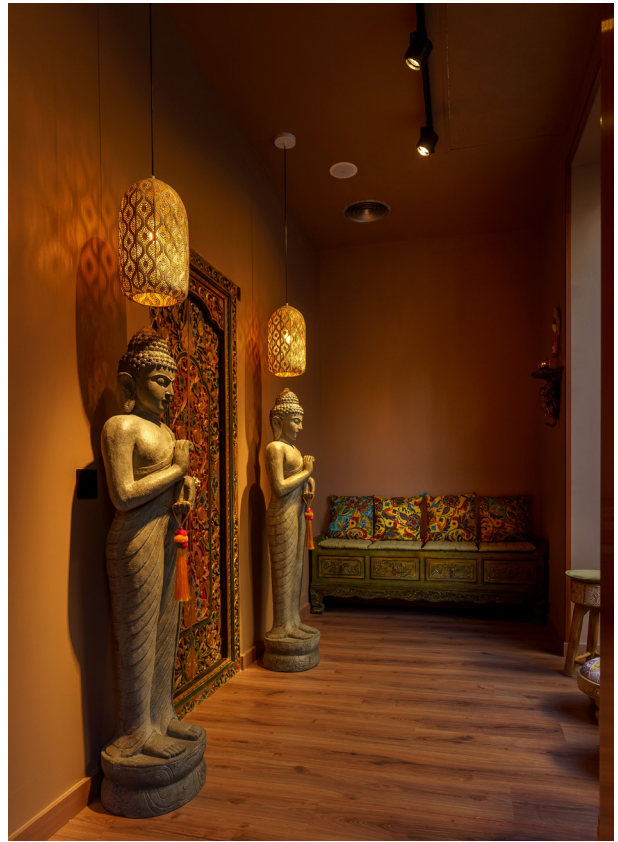

# Museum Plus Base Recessed

10039

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>Wattage</b>	12,3W 23,6W
<b>Lumen Output</b>	1600 3300
<b>Connection</b>	359mA 700mA
<b>Driver</b>	Not included
<b>Dimmable</b>	ON/OFF, DALI, PUSH (See drivers section)

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	Ø70 h60mm
<b>Dimensions</b>	Ø93 h90mm
<b>Adjustable</b>	Yes



Ø70

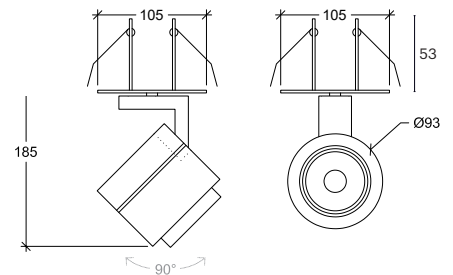

10039\*\*0.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10039	12	27 2700	1 Narrow 12°	○ 10 White	XXX Driver not included (See drivers section)
	24	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 36°	Other finishes available upon request	



- 20022.A.1.20 Asymmetric cowl
- 20022.A.2.20 Symmetric cowl
- 20022.A.3.20 Barn doors
- 20022.A.4.20 Oval lens
- 20022.A.5.20 Spread lens
- 20022.A.6.20 Honeycomb Louvre

● Black




# Pictus Track

20023


GOOD NIGHT

Track



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>Wattage</b>	6,8W
<b>Lumen Output</b>	845
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Non-dimmable Dimmable DALI

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 >55.000 h
<b>Cut-out Size</b>	70mm
<b>Dimensions</b>	Ø35 h90mm
<b>Adjustable</b>	Yes

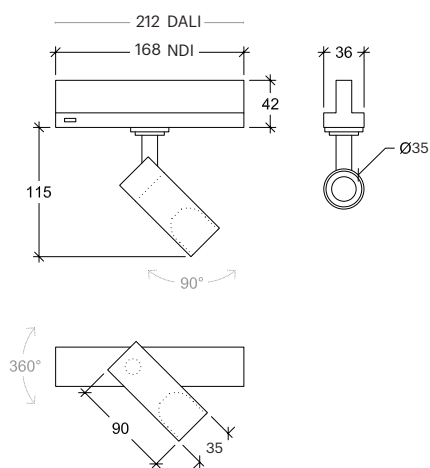

20023.7.\*\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20023	7	27 2700	1 Narrow 20°	○ 10 White	NDI Non-dimmable Driver
		30 3000	2 Medium 38°	● 20 Black	DAL DALI Driver
		40 4000	3 Wide 50°	● 30 Aluminium	
				● 40 Gold	
				● AO Corten	
				● BO Copper	

Other finishes available upon request








# Fluctus 130 Track

20024


GOOD NIGHT

Track




Installation	Indoor	
Mounting Position	Track	
IP	20	
Wattage	5W	8,6W
Lumen Output	700	1200
Connection	230V	
Driver	Included built-in	
Dimmable	Non-dimmable Dimmable DALI	

CRI	>90
Life Time	L80/B10 > 55.000h
Cut-out Size	-
Dimensions	Ø56 h128mm
Adjustable	Yes

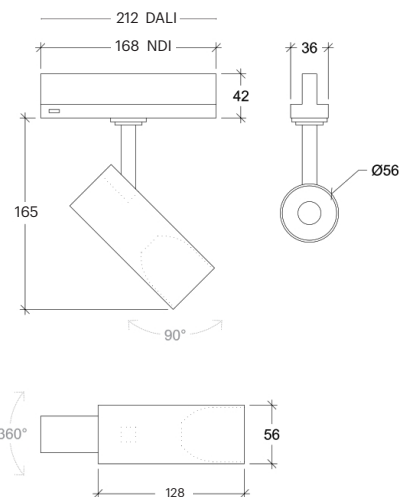

700 LM / 84mm




1200 LM / 168mm



20024.9.\*\*.\*\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim	
20024	5	27 2700	1 Narrow 14°	○ 10 White	NDI Non-dimmable Driver	
		30 3000	2 Medium 25°	● 20 Black	DAL DALI Driver	
	9	40 4000	3 Wide 40°	Other finishes available upon request		
				4 Superwide 60°		

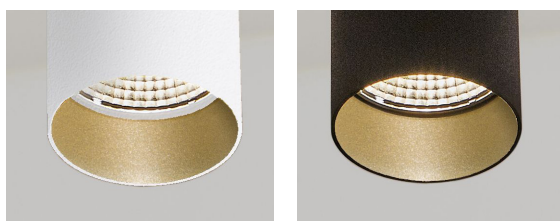

Other finishes are available upon request for the external body and the internal ring






PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Fluctus 170 Track

20026


GOOD NIGHT

Track




Installation	Indoor	
Mounting Position	Track	
IP	20	
Wattage	5W	8,6W
Lumen Output	700	1200
Connection	230V	
Driver	Included	
Dimmable	Phase dim DALI	

CRI	>90
Life Time	L80/B10 > 55.000h
Cut-out Size	-
Dimensions	Ø56 h168mm
Adjustable	Yes

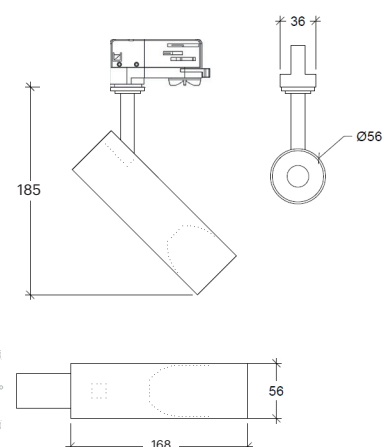

20026.\*.\*\*.\*.\*\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20026	5	27 2700	1 Narrow 14°	○ 10 White	DTR Phase Dim
		30 3000	2 Medium 25°	● 20 Black	DAL DALI Driver
	9	40 4000	3 Wide 40°	Other finishes available upon request	
			4 Wide 60°		

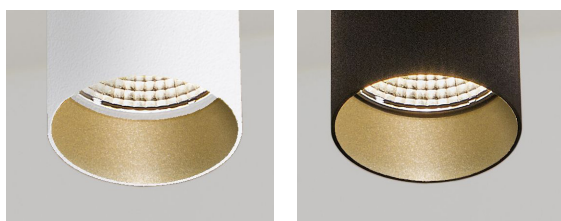

Other finishes are available upon request for the external body and the internal ring



RESTAURANT MAKO / PROJECT: FORTEZA APARICIO



EL CROSANET / PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA

# Furtivus-Zoom Track

20007

GOOD NIGHT

Track




INDOOR

TRACK



DIMMABLE

<b>Installation</b>	Indoor	<b>CRI</b>	>90
<b>Mounting Position</b>	Track	<b>Life Time</b>	30.000 h
<b>IP</b>	20	<b>Cut-out Size</b>	-
<b>Wattage</b>	12W	<b>Dimensions</b>	Ø60 h165mm
<b>Lumen Output</b>	700	<b>Adjustable</b>	Yes
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Phase Dim		

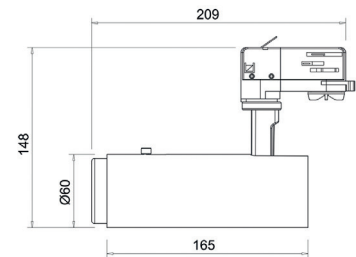

20007.12.27.9.\*\*


Number	W	Colour Temperature	Light Distribution	Finish	Dim
20007	12	27 2700	9 Zoom 9°-42°	○ 10 White ● 20 Black	DTR Phase Dim

# Audere Track

20025


GOOD NIGHT

Track




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>Wattage</b>	20W
<b>Lumen Output</b>	2600
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Non-dimmable DALI

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 > 55.000h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø80 h142mm
<b>Adjustable</b>	Yes

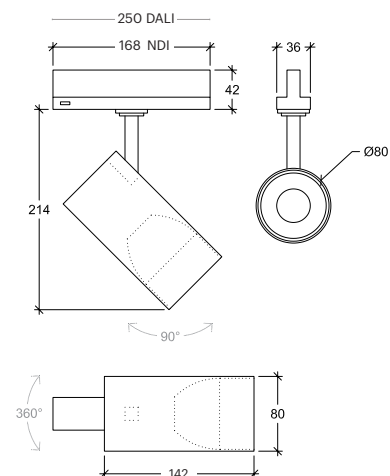

20025.20.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20025	20	27 2700	1 Narrow 14°	10 White	<b>NDI</b> Non-dimmable Driver
		30 3000	2 Medium 25°	20 Black	<b>DAL</b> DALI Driver
		40 4000	3 Wide 40°	30 Aluminium (Black connector)	Other finishes available upon request
			4 Superwide 60°		

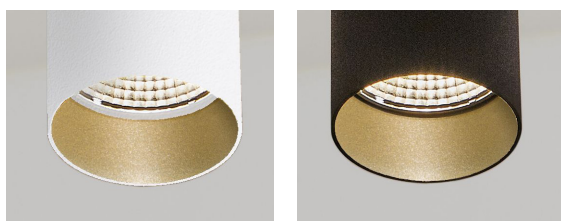

Other finishes are available upon request for the external body and the internal ring





LA MALLORQUINA / PROJECT: ESTUDI FRANCESC PONS





LA MALLORQUINA / PROJECT: ESTUDI FRANCESC PONS




LA MALLORQUINA / PROJECT: ESTUDI FRANCESC PONS

# Museum Plus Track

20022


GOOD NIGHT

Track



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>Wattage</b>	12,3W    23,6W
<b>Lumen Output</b>	1600    3300
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Non-dimmable Dimmable DALI

<b>CRI</b>	>90
<b>Life Time</b>	L80/B10 > 55.000h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø93 h90mm
<b>Adjustable</b>	Yes
<b>Track connector</b>	ON/OFF    168mm DALI2 12,3W    212mm DALI2 23,6W    248mm

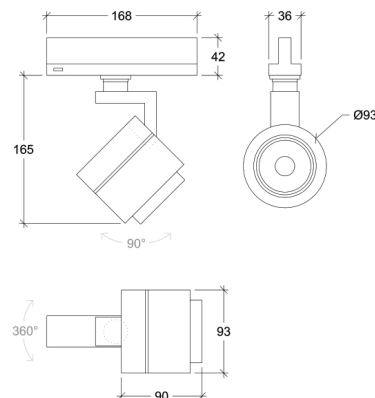

20022.20.\*\*.\*.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20022	12	27 2700	1 Narrow 12°	○ 10 White	<b>NDI</b> Non-dimmable Driver <b>DAL</b> DALI
	24	30 3000	2 Medium 25°	● 20 Black	
		40 4000	3 Wide 36°	Other finishes available upon request	



- 20022.A.1.20 Asymmetric cowl
- 20022.A.2.20 Symmetric cowl
- 20022.A.3.20 Barn doors
- 20022.A.4.20 Oval lens
- 20022.A.5.20 Spread lens
- 20022.A.6.20 Honeycomb Louvre

● Black



CREP NOVA / PROJECT: CARLOS MARTÍNEZ INTERIORS





NUAD THAI MASSAGE SPA



CAFÉ D'ESPANYA TREMP / PROJECT: OLGA ESCOBAR ESTUDIOS / PHOTO: MAR ARPÓN





EL FOMENT / PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: MARC TORRA



GONZALEZ & CO / PROJECT: TARRUELLA TRENCHES STUDIO / PHOTO: DAVID VILANOVA

Ars

20029

GOOD NIGHT

Track




INDOOR

TRACK

<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>Wattage</b>	15W
<b>Lumen Output</b>	1130
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>90
<b>Life Time</b>	30.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø78 h234mm
<b>Adjustable</b>	-

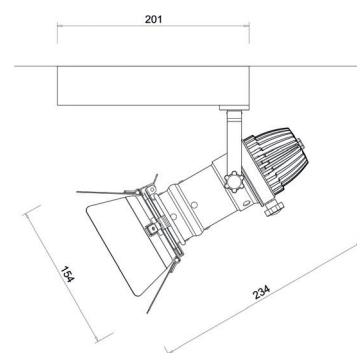

20029.15.27.2.20

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20029	15	27 2700	2 Medium 24°	20 Black	NDI* Driver included (non-dimmable)



BORDA LOBATO / PROJECT: TOOLSTUDIO BY GIANNI RUGGIERO / PHOTO: ANNA TUR BLANCH

# Elongatus Track

20040


GOOD NIGHT

Track




<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>Wattage</b>	20W
<b>Lumen Output</b>	1800
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Non-dimmable

<b>CRI</b>	>80
<b>Life Time</b>	35.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	57x33 h603mm
<b>Adjustable</b>	-



20040.20.30.6.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20040	20	30 3000	 6 Opal	<input type="radio"/> 10 White <input checked="" type="radio"/> 20 Black	NDI Driver included non-dimmable)




# Sabrolumo Track L600

20440



GOOD NIGHT

Track



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>IK</b>	06
<b>Wattage</b>	27W (24W / 20W / 17W)*
<b>Lumen Output</b>	4320
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable (dimmable drivers on request) DALI


<b>CRI</b>	>80
<b>Life Time</b>	50.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	607x64 h54mm
<b>Adjustable</b>	No

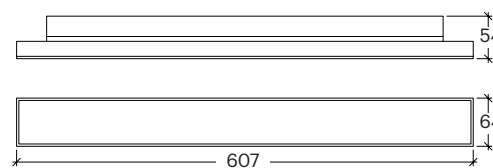

20440.27.\*\*.\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20440	27	30 3000	2 Medium 30°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000	3 Wide 60°		
		50 5000	4 Superwide 90°		
		60 6000	5D Double Asym. 2x25°		
			5DW Double Asym. 2x60°		
			6 Opal 120°		

\* Power selector

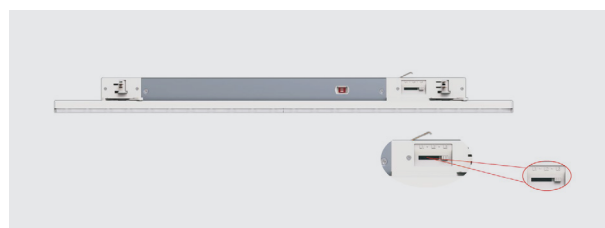

Phase adjustable L1/L2/L3






# Sabrolumo Track L1200

20441



GOOD NIGHT

Track



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>IK</b>	06
<b>Wattage</b>	53W (46W / 39W / 17W)*
<b>Lumen Output</b>	8480
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable (dimmable drivers on request) DALI


<b>CRI</b>	>80
<b>Life Time</b>	50.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	1204x64 h54mm
<b>Adjustable</b>	No



20441.53.\*\*.\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20441	53	30 3000	2 Medium 30°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000	3 Wide 60°		
		50 5000	4 Superwide 90°		
		60 6000	5D Double Asym. 2x25°		
			5DW Double Asym. 2x60°		
			6 Opal 120°		

\* Power selector

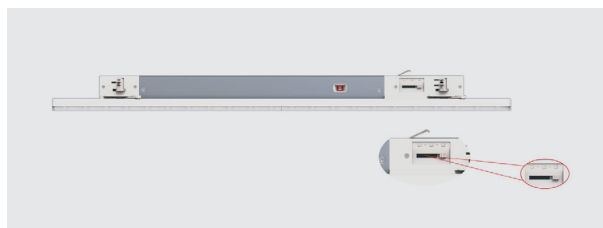


Phase adjustable L1/L2/L3

# Sabrolumo Track L1500

20442



GOOD NIGHT

Track



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>IK</b>	06
<b>Wattage</b>	64W (56W / 47W / 39W)*
<b>Lumen Output</b>	10240
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable (dimmable drivers on request) DALI


<b>CRI</b>	>80
<b>Life Time</b>	50.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	1504x64 h54mm
<b>Adjustable</b>	No



20442. 64.\*\*.\*\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20442	64	30 3000	2 Medium 30°	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000	3 Wide 60°		
		50 5000	4 Superwide 90°		
		60 6000	5D Double Asym. 2x25°		
			5DW Double Asym. 2x60°		
			6 Opal 120°		

\* Power selector

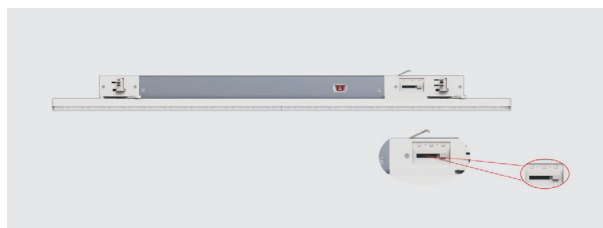

Phase adjustable L1/L2/L3

# Sabrolumo UGR Track L600


20450

GOOD NIGHT

Track





**UGR**  
**<19**



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>IK</b>	06
<b>Wattage</b>	27W (24W / 20W / 17W)*
<b>Lumen Output</b>	3300
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable (dimmable drivers on request) DALI


<b>CRI</b>	>80
<b>Life Time</b>	50.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	607x64 h54mm
<b>Adjustable</b>	No

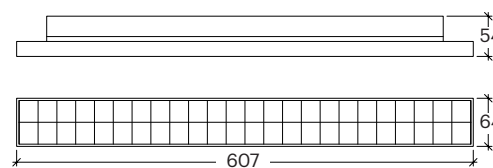

20450.27.\*\*.\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20450	27	30 3000	3 Wide 50° UGR<19 Silver reflector	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	
		50 5000			
		60 6000			

\* Power selector

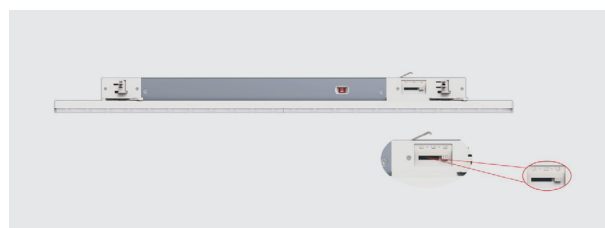

Phase adjustable L1/L2/L3

# Sabrolumo UGR Track L1200


GOOD NIGHT

20451

Track





**UGR**  
**<19**



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>IK</b>	06
<b>Wattage</b>	53W (46W / 39W / 17W)*
<b>Lumen Output</b>	6700
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable (dimmable drivers on request) DALI


<b>CRI</b>	>80
<b>Life Time</b>	50.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	1204x64 h54mm
<b>Adjustable</b>	No



20451.53.\*\*.\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20451	53	30 3000	3 Wide 50° UGR<19 Silver reflector	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	
		50 5000			
		60 6000			

\* Power selector

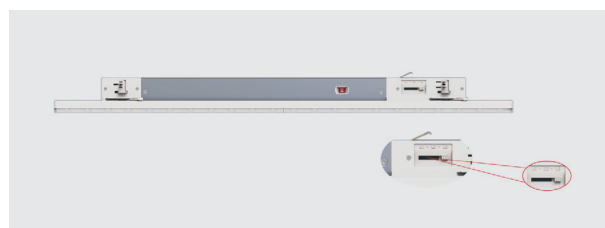

Phase adjustable L1/L2/L3

# Sabrolumo UGR Track L1500


GOOD NIGHT

20452

Track





**UGR**  
**<19**



<b>Installation</b>	Indoor
<b>Mounting Position</b>	Track
<b>IP</b>	20
<b>IK</b>	06
<b>Wattage</b>	64W (56W / 47W / 39W)*
<b>Lumen Output</b>	8250
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable (dimmable drivers on request) DALI


<b>CRI</b>	>80
<b>Life Time</b>	50.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	1504x64 h54mm
<b>Adjustable</b>	No



20452. 64.\*\*.\*\*.NDI\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
20452	64	30 3000	3 Wide 50° UGR<19 Silver reflector	○ 10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request
		40 4000		● 20 Black	
		50 5000			
		60 6000			



\* Power selector

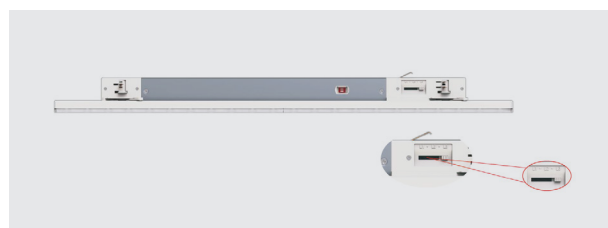


Phase adjustable L1/L2/L3



20XTS

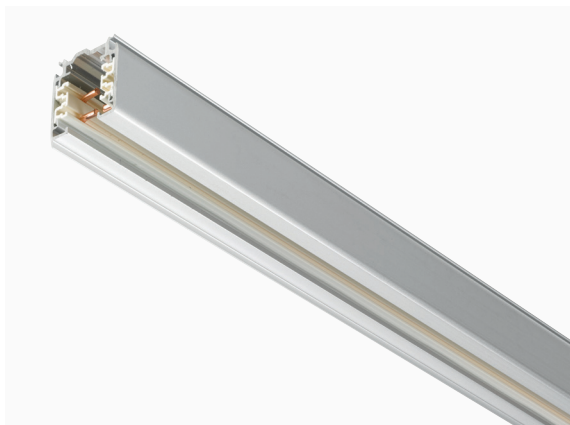


Surface Profile

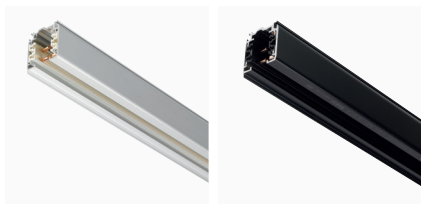


Reference	Description	Length	Finish
20XTS4100-2	Lighting track 3-circuit	1000mm	● Black
20XTS4100-3	Lighting track 3-circuit	1000mm	○ White
20XTS4200-2	Lighting track 3-circuit	2000mm	● Black
20XTS4200-3	Lighting track 3-circuit	2000mm	○ White
20XTS4300-2	Lighting track 3-circuit	3000mm	● Black
20XTS4300-3	Lighting track 3-circuit	3000mm	○ White

Other tracks (upon request)


Recessed 3-Phase Track



Surface DALI Track



Recessed DALI Track





## 1. Accessories for Surface

**End Feed**

- 20XTS11-2  End feed right
- 20XTS11-3  End feed right
- 20XTS12-2  End feed left
- 20XTS12-3  End feed left

**T-Connector**

- 20XTS40-2  T-Connector
- 20XTS40-3  T-Connector

**Middle Feed**

- 20XTS14-2  Middle feed
- 20XTS14-3  Middle feed

**X-Connector**

- 20XTS38-2  X-Connector
- 20XTS38-3  X-Connector

**Flexible Connector**

- 20XTS23-2  Flexible corner connector
- 20XTS23-3  Flexible corner connector

**Adjustable corner**

- 20XTS24-2  Adjustable corner connector
- 20XTS24-3  Adjustable corner connector

**Endcap**

- 20XTS41-2  Endcap
- 20XTS41-3  Endcap

**Straight Connector**

- 20XTS21-2  Straight connector
- 20XTS21-3  Straight connector

**Surface Clamp**

- 20SKB10-2  Surface clamp
- 20SKB10-3  Surface clamp

**L-Connector**

- 20XTS34-2  L-Connector in
- 20XTS34-3  L-Connector in
- 20XTS35-2  L-Connector out
- 20XTS35-3  L-Connector out

**Fix Point**

- 20GA70-2  Adapter connector
- 20GA70-3  Adapter connector

**Accessory for suspended**

- 20SPW11SK – 2  1'5m other lengths upon request
- 20SPW11SK – 3  1'5m other lengths upon request

Outdoor products

Recessed

- 212 Caminus-s
- 214 Caminus-r
- 216 Caminus-l
- 218 Moenia
- 220 Oculus
- 221 Signum

Surface / Suspended



- 222 Lanterna Battery
- 223 Big Lanterna Battery
- 224 Lucerna 34 230V
- 225 Lucerna 50 230V
- 226 Lucerna Wall 230V
- 227 Simetrix
- 228 ERRE2
- 230 Vallum Big
- 231 Vallum Small
- 232 Bacilis R
- 233 Bacilis Q
- 234 Big Bacilis R
- 235 Big Bacilis Q
- 236 QX
- 238 Duplex
- 240 Demissus R
- 241 Demissus Q
- 242 Deorsum
- 243 Laminus Small
- 244 Laminus Big
- 245 Fenestra
- 246 Magicae IP
- 247 Iudice
- 248 Unguis
- 249 Big Unguis
- 250 Viceversa-2
- 251 Tunnel

# Caminus-s


70007

GOOD NIGHT

Recessed

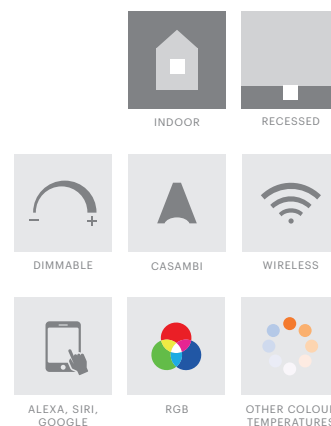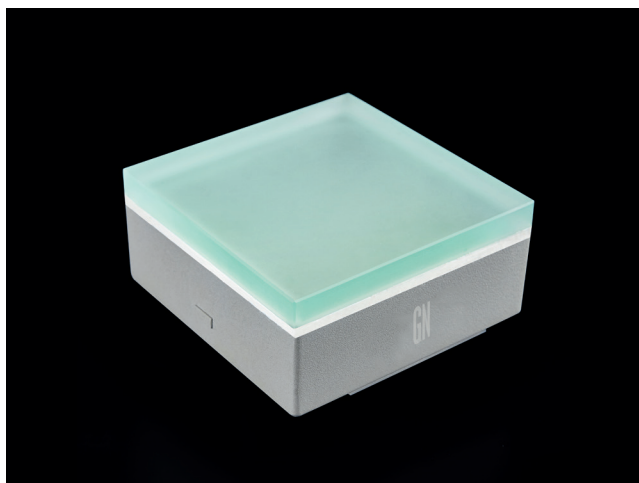

<b>Power Rating</b>	1,3 W
<b>Life Span</b>	50.000 h
<b>LED Colour</b>	White, RGB
<b>Beam Angle</b>	100°
<b>Input Voltage</b>	24 VDC
<b>Material (Housing)</b>	Stainless Steel
<b>Glass Material</b>	Tempered Glass
<b>Working Temperature</b>	-25°C +50°C
<b>Dimension (without installation box)</b>	100 x 100 x 70 mm
<b>Cable Interconnect</b>	Power cable: 2 x 1.0 mm <sup>2</sup> Signal cable: 4 x 0,3 mm <sup>2</sup> rubber cable
<b>Control</b>	ON/OFF, DMX512
<b>IP</b>	IP67
<b>Luminous Flux</b>	75 lm

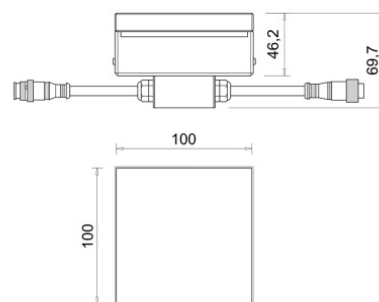

## 70007.1.27.6.80

Caminus-s 100x100 24V 1'3W 2700K Opal

## 70007.1.30.6.80

Caminus-s 100x100 24V 1'3W 3000K Opal

## 70007.1.RGB.6.80

Caminus-s 100x100 24V 1'3W RGB Opal



#### Accessories

- 70007.A.1 Caminus Leader cable 4m for monocolor
- 70007.A.2 Caminus Jumper cable 1m for monocolor
- 70007.A.3 Caminus endcap for monocolor

RGB Accessories upon request

Driver not included - See drivers section  
Control system and special drivers upon request



Custom projects upon request

# Caminus-r


70008

GOOD NIGHT

Recessed

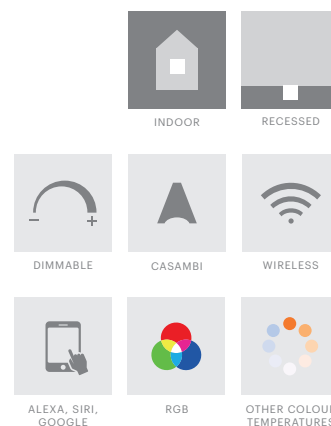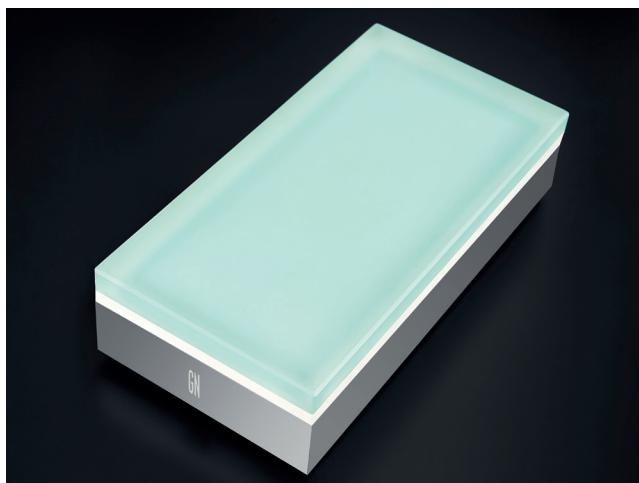

<b>Power Rating</b>	2,6 W
<b>Life Span</b>	50.000 h
<b>LED Colour</b>	White, RGB
<b>Beam Angel</b>	100°
<b>Input Voltage</b>	24 VDC
<b>Material (Housing)</b>	Stainless Steel
<b>Glass Material</b>	Tempered Glass
<b>Working Temperature</b>	-25°C +50°C
<b>Dimension (without installation box)</b>	100 x 200 x 70 mm
<b>Cable Interconnect</b>	Power cable: 2 x 1.0 mm <sup>2</sup> Signal cable: 4 x 0,3 mm <sup>2</sup> rubber cable
<b>Control</b>	ON/OFF, DMX512
<b>IP</b>	IP67
<b>Luminous Flux</b>	72,8lm

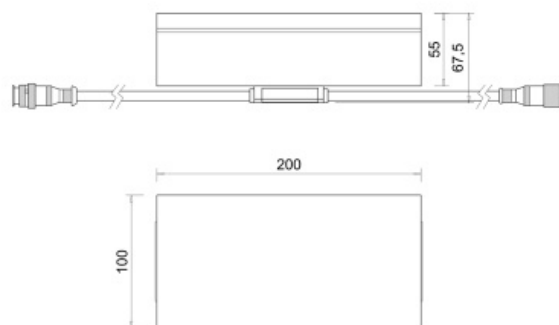

## 70008.3.27.6.80

Caminus-r 100x200 24V 2'6W 2700K Opal

## 70008.3.30.6.80

Caminus-r 100x200 24V 2'6W 3000K Opal

## 70008.3.RGB.6.80

Caminus-r 100x200 24V 2'6W RGB Opal



### Accessories

- 70007.A.1** Caminus Leader cable 4m for monocolor
- 70007.A.2** Caminus Jumper cable 1m for monocolor
- 70007.A.3** Caminus endcap for monocolor

RGB Accessories upon request

Driver not included - See drivers section  
Control system and special drivers upon request

Custom projects upon request

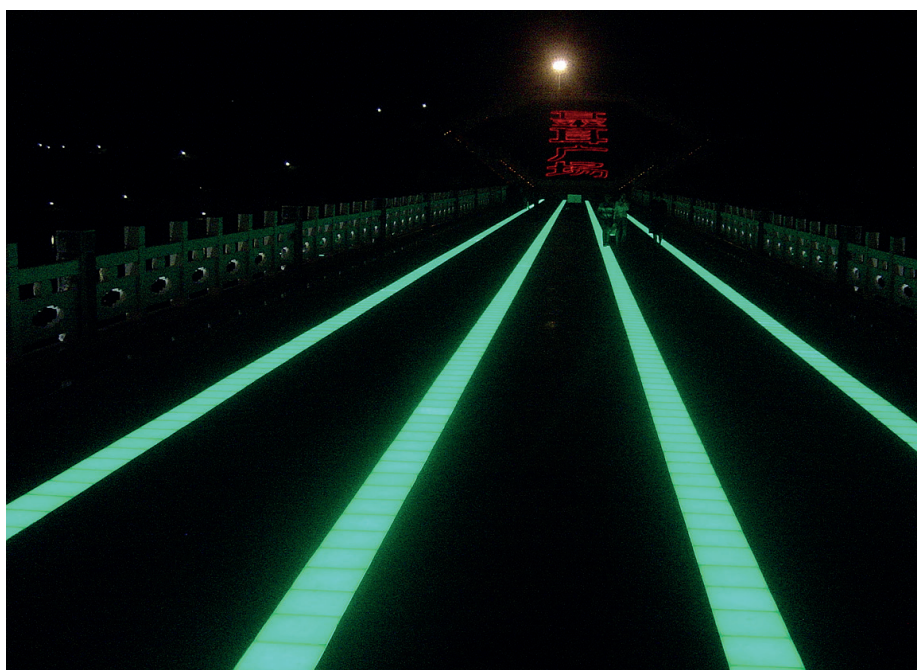
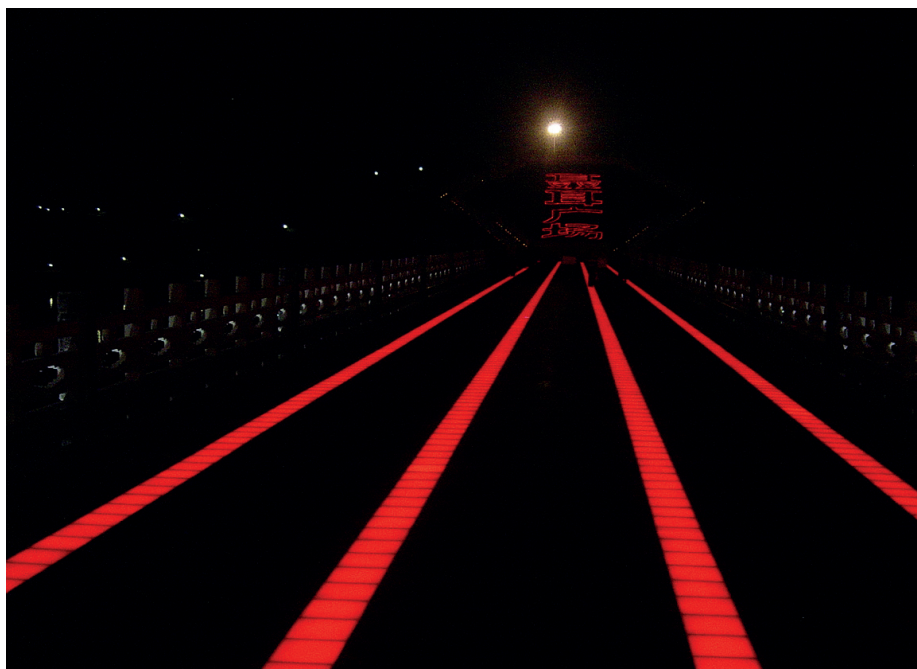


# Caminus-I


70009

GOOD NIGHT

Recessed

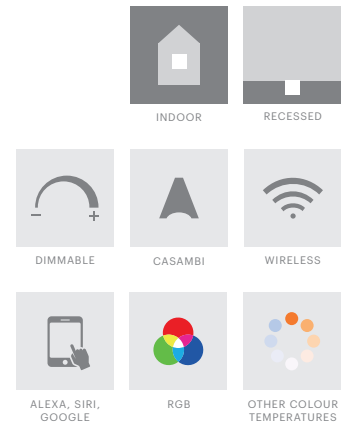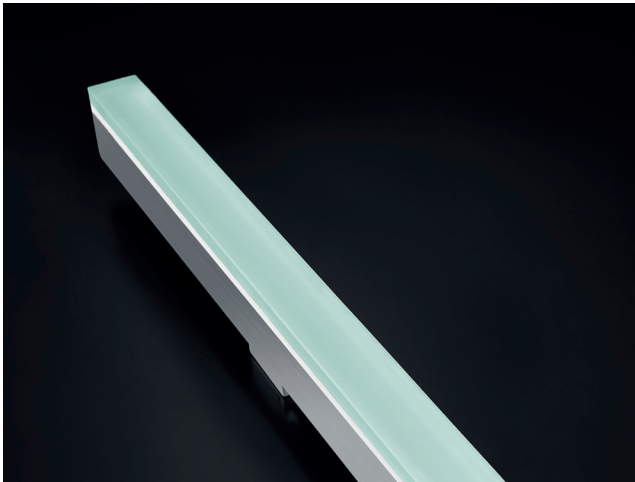

<b>Power Rating</b>	6 W
<b>Life Span</b>	50000 hours
<b>LED Colour</b>	White, RGB
<b>Beam Angel</b>	100°
<b>Input Voltage</b>	24 VDC
<b>Material (Housing)</b>	Stainless Steel
<b>Glass Material</b>	Tempered Glass
<b>Working Temperature</b>	-25°C +50°C
<b>Dimension (without installation box)</b>	36 x 1000 x 70 mm
<b>Cable Interconnect</b>	Power cable: 2 x 1.0 mm <sup>2</sup> Signal cable: 4 x 0,3 mm <sup>2</sup> rubber cable
<b>Control</b>	ON/OFF, DMX512
<b>IP</b>	IP67
<b>Luminous Flux</b>	350 lm

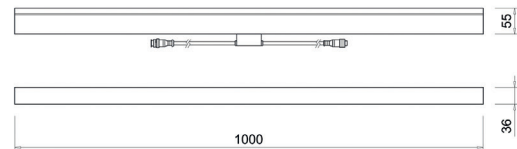

70009.6.27.6.80

Caminus-I 1000x36 24V 6W 2700K Opal

70009.6.30.6.80

Caminus-I 1000x36 24V 6W 3000K Opal

70009.6.RGB.6.80

Caminus-I 1000x36 24V 6W RGB Opal



### Accessories


- 70007.A.1** Caminus Leader cable 4m for monocolor
- 70007.A.2** Caminus Jumper cable 1m for monocolor
- 70007.A.3** Caminus endcap for monocolor

RGB Accessories upon request

Driver not included - See drivers section  
Control system and special drivers upon request

Custom projects upon request



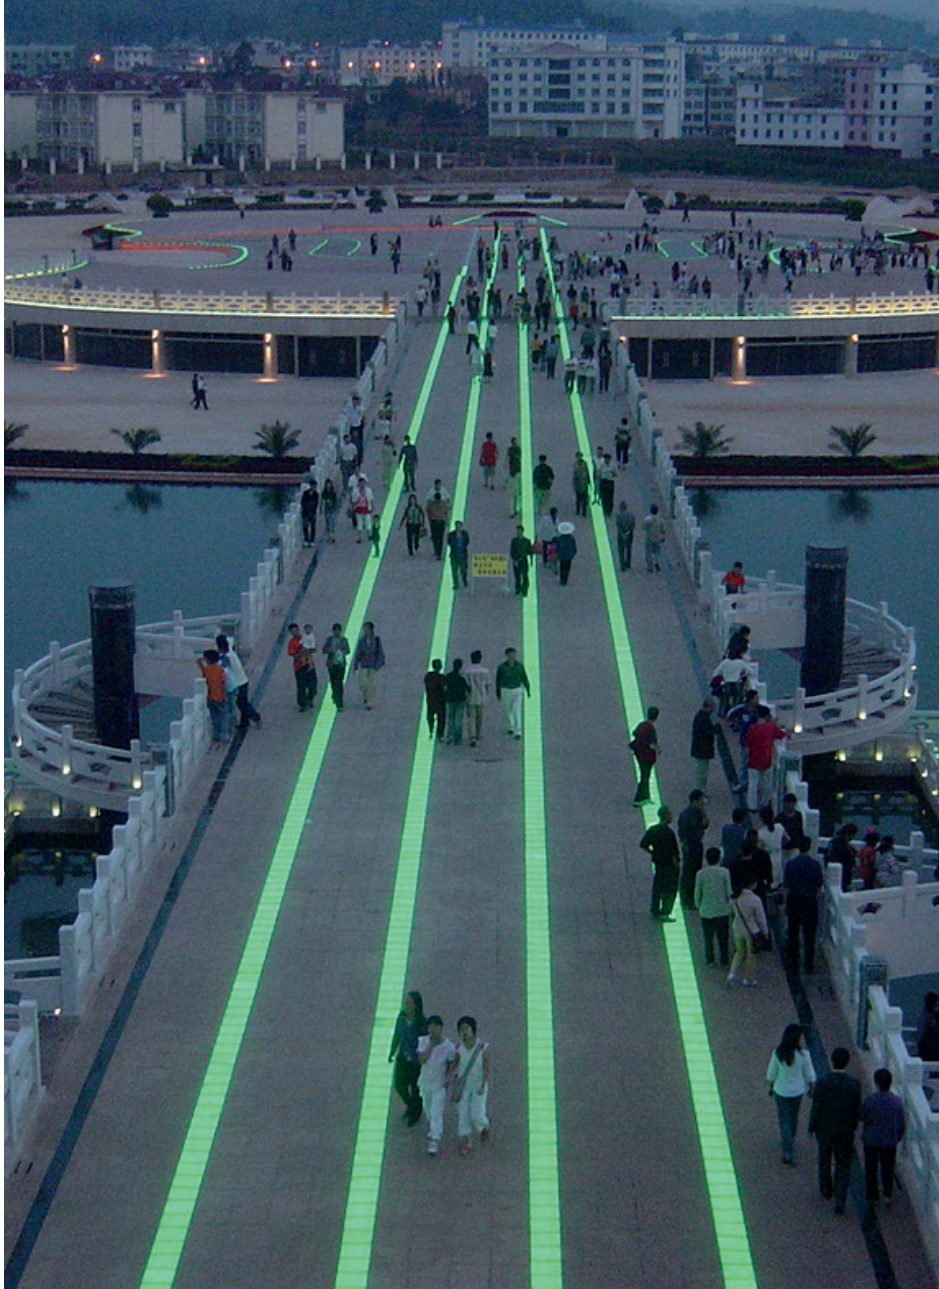

Moenia

75001


GOOD NIGHT

Recessed wall




<b>Installation</b>	Outdoor
<b>Mounting Position</b>	Wall recessed
<b>IP</b>	65
<b>Wattage</b>	3W
<b>Lumen output</b>	200
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>80
<b>Life Time</b>	20.000 h
<b>Cut-out Size</b>	Ø75 h80mm
<b>Dimensions</b>	Ø80 h70mm
<b>Adjustable</b>	-

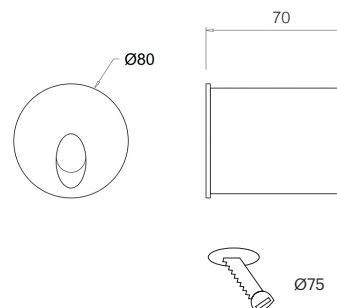

75001.3.30.5.60

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75001	3	30 3000	 5 Asymetric	<ul style="list-style-type: none"> <li>● 60 Dark Grey</li> <li>○ 10 White</li> </ul>	NDI* Driver included (non-dimmable)




Oculus

75006


GOOD NIGHT

Recessed wall




Installation	Indoor / Outdoor
Mounting Position	Wall recessed
IP	65
Wattage	2W
Lumen output	120
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable

CRI	>80
Life Time	30.000 h
Cut-out Size	Ø75 h38mm
Dimensions	Ø80 h38mm
Adjustable	No

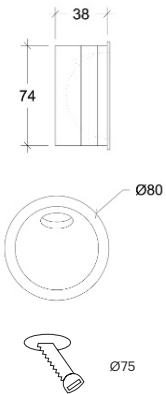

70006.1.30.5.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70006	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Supplied with 200cm cable

Signum

70702


GOOD NIGHT

Recessed wall




Installation	Indoor / Outdoor
Mounting Position	Wall recessed
IP	65
Wattage	1,5W
Lumen output	170
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable

CRI	>90
Life Time	40.000 h
Cut-out Size	Ø68 h71mm
Dimensions	Ø75 h53mm
Adjustable	No

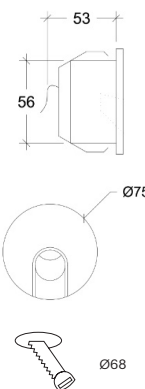

70702.1.\*\*.\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
70702	1	30 3000	 5 Asymmetric	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Supplied with 200cm cable  
Recessing box included

# Lanterna Battery


80004

GOOD NIGHT


Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>85
<b>Mounting Position</b>	Surface	<b>Life Time</b>	20.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	2,2W	<b>Dimensions</b>	102x102 h340mm
<b>Lumen output</b>	204	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable</b>	Touch dimmable		

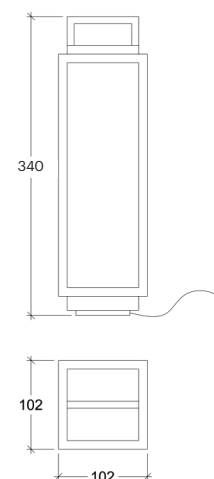

80004.3.30.5.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80004	3	30 3000	 6 Opal	<input type="radio"/> 10 White <input checked="" type="radio"/> 20 Black	TDI

Portable LED light  
 2x2200mAh lithium battery  
 Charge time 6-8 hours  
 Work time 12 hours  
 Touch switch dimmable



Power adapter included  
 Ø 75mm Recharging base included

# Big Lanterna Battery

80005


GOOD NIGHT

Surface




<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	54
<b>Wattage</b>	2,2W
<b>Lumen output</b>	204
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable</b>	Touch dimmable

<b>CRI</b>	>85
<b>Life Time</b>	20.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	140x140 h540mm
<b>Adjustable</b>	No

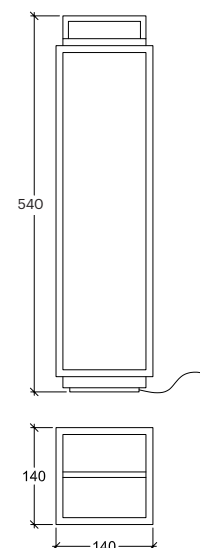

80005.3.30.5.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80005	3	30 3000	 6 Opal	<input type="radio"/> 10 White <input checked="" type="radio"/> 20 Black	TDI

Portable LED light  
 2x2200mAh lithium battery  
 Charge time 6-8 hours  
 Work time 12 hours  
 Touch switch dimmable




Power adapter included  
 Ø 75mm Recharging base included

# Lucerna 34 230V


80006

GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>85
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	7W	<b>Dimensions</b>	142x142 h340mm
<b>Lumen output</b>	390	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		

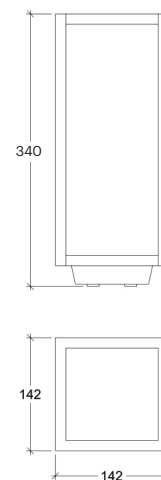

80006.7.30.6.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80006	7	30 3000	6 Opal	20 Black	NDI* Driver included (non-dimmable)




# Lucerna 50 230V


80007

GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>85
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	7W	<b>Dimensions</b>	142x142 h500mm
<b>Lumen output</b>	390	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		

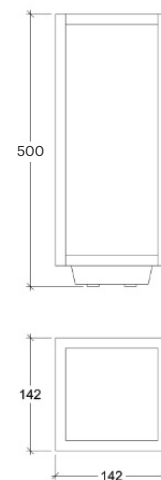

80007.7.30.6.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80007	3	30 3000	6 Opal	20 Black	NDI* Driver included (non-dimmable)

# Lucerna Wall 230V

80009


GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	54
<b>Wattage</b>	7W
<b>Lumen output</b>	220
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>85
<b>Life Time</b>	30.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	126x125 h250mm
<b>Adjustable</b>	No

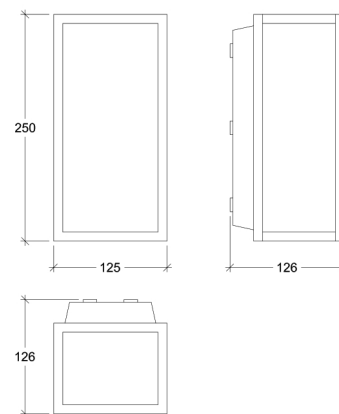

80009.7.30.6.\*\*.NDI


Number	W	Colour Temperature	Light Distribution	Finish	Dim
80009	7	30 3000	6 Opal	20 Black	NDI* Driver included (non-dimmable)

Simetrix


80808

GOOD NIGHT


Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	65	<b>Cut-out Size</b>	-
<b>Wattage</b>	2x3W	<b>Dimensions</b>	85x88 h117mm
<b>Lumen output</b>	37	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		

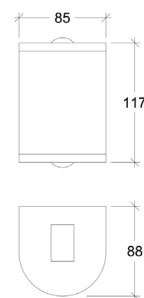

80808.6.30.1.20.NDI


Number	W	Colour Temperature	Light Distribution	Finish	Dim
80808	6	30 3000	 1 Narrow	● 20 Black	NDI* Driver included (non-dimmable)

ERRE2


80022

GOOD NIGHT


Surface



Installation	Indoor / Outdoor	CRI	>80
Mounting Position	Surface	Life Time	30.000 h
IP	65	Cut-out Size	-
Wattage	3W	Dimensions	55x75 h105mm
Lumen output	37	Adjustable	Yes
Connection	230V		
Driver	Included built-in		
Dimmable*	Non-dimmable		

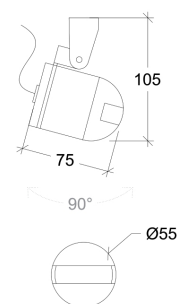

80022.6.30.1.20

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80022	3	30 3000	 1 Narrow	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




# Vallum Big

80020


GOOD NIGHT

Surface





<b>Installation</b>	Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	65
<b>Wattage</b>	6
<b>Lumen Output</b>	450
<b>Connection</b>	230
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable
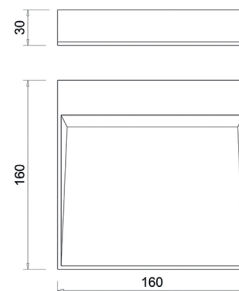
<b>CRI</b>	>80
<b>Life Time</b>	20.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	160x160 h30mm



80020.6.30.5.60

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80020	6	30 3000	 5 Asymmetric	 60 Dark Grey	NDI* Driver included (non-dimmable)




# Vallum Small

80021


GOOD NIGHT

Surface





<b>Installation</b>	Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	65
<b>Wattage</b>	3
<b>Lumen Output</b>	250
<b>Connection</b>	230
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable
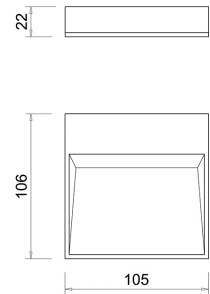
<b>CRI</b>	>80
<b>Life Time</b>	20.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	105x106 h22mm



80021.3.30.5.60

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80021	3	30 3000	 5 Asymmetric	 60 Dark Grey	NDI* Driver included (non-dimmable)




Bacilis R

75002


GOOD NIGHT

Surface





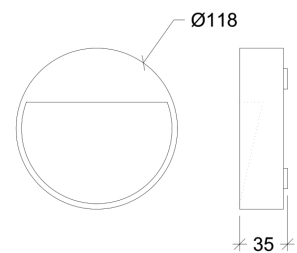

Installation	Indoor / Outdoor
Mounting Position	Surface
IP	54
Wattage	6W
Lumen output	650
Connection	230V
Driver	Included built-in
Dimmable*	Non-dimmable

CRI	>80
Life Time	30.000 h
Cut-out Size	-
Dimensions	Ø118 h35mm
Adjustable	No



75002.6.\*\*.5.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75002	6	30 3000 40 4000	 5 Asymmetric	 10 White  60 Dark Grey  A0 Corten	NDI* Driver included (non-dimmable)

Other finishes available upon request






Bacilis Q

75003


GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	54
<b>Wattage</b>	6W
<b>Lumen output</b>	650
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>80
<b>Life Time</b>	30.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	115x115 h35mm
<b>Adjustable</b>	No

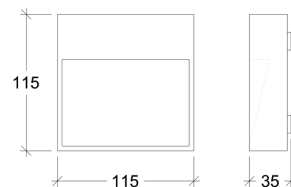

75002.3.\*\*.5.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
75002	6	30 3000 40 4000	5 Asymmetric	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> 10 White</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: grey; border-radius: 50%; margin-right: 5px;"></span> 60 Dark Grey</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8B4513; border-radius: 50%; margin-right: 5px;"></span> A0 Corten</li> </ul> <p>Other finishes available upon request</p>	NDI* Driver included (non-dimmable)



# Big Bacilis R


75004

GOOD NIGHT


Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	6W	<b>Dimensions</b>	Ø150 h35mm
<b>Lumen output</b>	130	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		

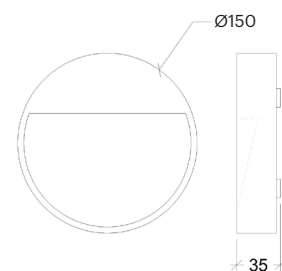

75004.6.\*\*.5.\*\*.NDI


Number	W	Colour Temperature	Light Distribution	Finish	Dim
75004	6	30 3000	 5 Asymetric	○ 10 White Other finishes available upon request	NDI* Driver included (non-dimmable)

# Big Bacilis Q


75005

GOOD NIGHT


Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	6W	<b>Dimensions</b>	150x150 h35mm
<b>Lumen output</b>	130	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		

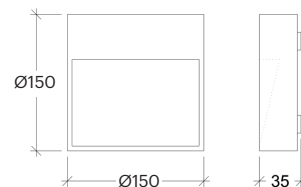

75XXX.6.30.5.\*\*


Number	W	Colour Temperature	Light Distribution	Finish	Dim
75005	6	30 3000	 5 Asymetric	○ 10 White Other finishes available upon request	NDI* Driver included (non-dimmable)

QX

30071

GOOD NIGHT

Surface



OUTDOOR



SURFACE





CASAMBI



WIRELESS



<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	54
<b>Wattage</b>	2 x 3W
<b>Lumen output</b>	600
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>90
<b>Life Time</b>	30.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	100x100 h110mm
<b>Adjustable</b>	Yes



30071.6.30.X. \*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
	6	30 3000	X 0° a 120°	<i>Exterior &amp; Interior</i> ☉ 11 White & White ● 26 Black & Dark Grey ● 31 Aluminium & White ● 41 Gold & White ● 66 Dark Grey & Dark grey ● A1 Corten & White ● B1 Copper & White RO RAL Chart	NDI* Driver included (non-dimmable)

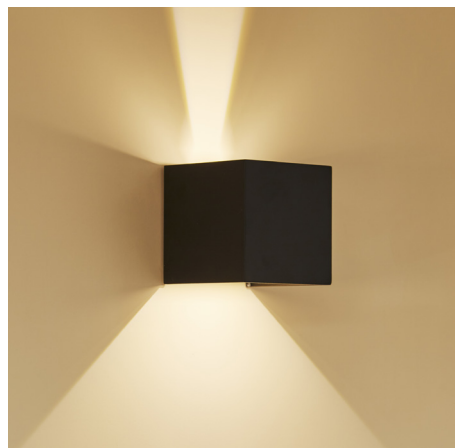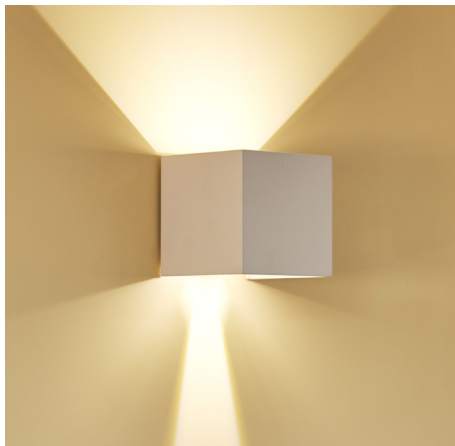


Duplex


80015

GOOD NIGHT

Surface




<b>Installation</b>	Outdoor	<b>CRI</b>	GU10 x2
<b>Mounting Position</b>	Surface	<b>Life Time</b>	GU10 x2
<b>IP</b>	65	<b>Cut-out Size</b>	Ø65x170 h106mm
<b>Wattage</b>	GU10 x 2 lamps	<b>Dimensions</b>	-
<b>Lumen output</b>	-	<b>Adjustable</b>	-
<b>Connection</b>	GU10-230V		
<b>Driver</b>	Not necessary		
<b>Dimmable</b>	GU10		

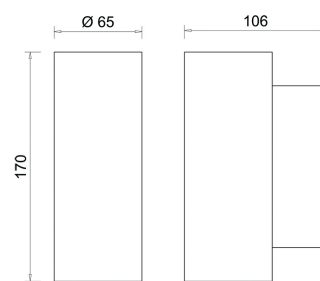


80015.GU10.XX.X.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80015	GU10 x 2 lamps	XX	X	<input type="radio"/> 10 White <input checked="" type="radio"/> 60 Dark Grey	Depending on lamp

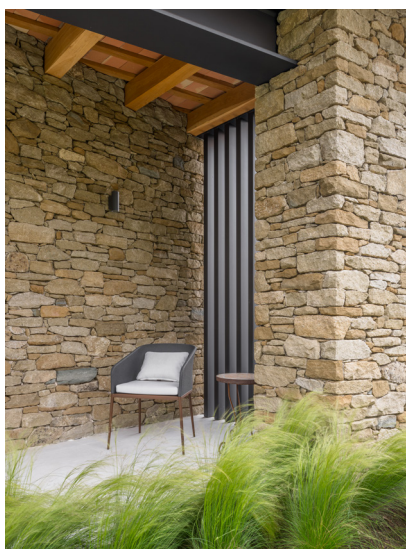

PROJECT: SANDRA SOLER ESTUDIO / PHOTO: MARC TORRA

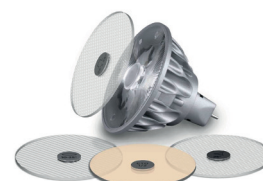

Available SORAA lamps



PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: MARC TORRA



PROJECT: SANDRA SOLER ESTUDIO / PHOTO: MARC TORRA

# Demissus R

80016


GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	54
<b>Wattage</b>	GU10
<b>Lumen output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	-
<b>Dimensions</b>	83x65 h80mm
<b>Adjustable</b>	No

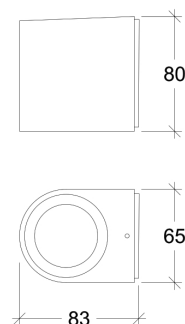

80016.GU10.X.X.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80016	GU10	Depending on lamp	Depending on lamp	<ul style="list-style-type: none"> <li>○ 10 White</li> <li>● 60 Dark Grey</li> <li>● AO Corten</li> </ul> <p>Other finishes available upon request</p>	Depending on lamp





# Demissus Q

80017


GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	54
<b>Wattage</b>	GU10
<b>Lumen output</b>	GU10
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable</b>	Depending on lamp

<b>CRI</b>	GU10
<b>Life Time</b>	GU10
<b>Cut-out Size</b>	-
<b>Dimensions</b>	80x65 h80mm
<b>Adjustable</b>	No

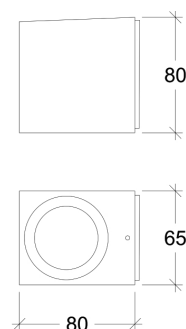

80016.GU10.X.X.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80016	GU10	Depending on lamp	Depending on lamp	<ul style="list-style-type: none"> <li>○ 10 White</li> <li>● 60 Dark Grey</li> <li>● AO Corten</li> </ul> <p>Other finishes available upon request</p>	Depending on lamp





Deorsum

80018



GOOD NIGHT

Surface

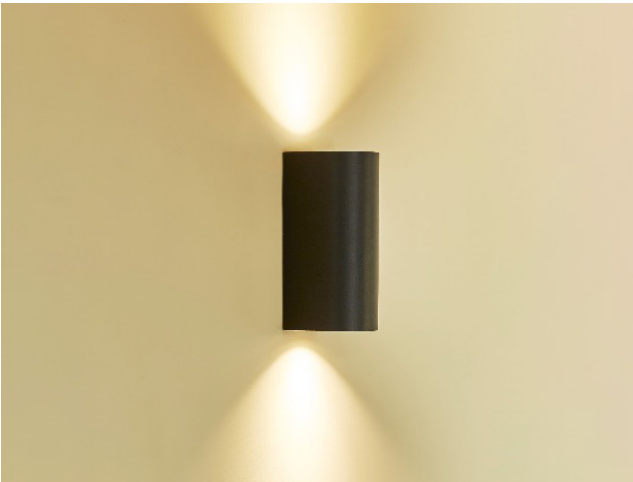

Installation	Indoor / Outdoor
Mounting Position	Surface
IP	54
Wattage	2 x GU10
Lumen output	2 x GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	83x65 h150mm
Adjustable	No



80018.GU10.X.X.\*\*

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80018	GU10	Depending on lamp	Depending on lamp	○ 10 White	Depending on lamp

● 60 Dark Grey

● A0 Corten

Other finishes available upon request




# Laminus Small


80085

GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	2 x 6W	<b>Dimensions</b>	114x34 h90mm
<b>Lumen output</b>	1400	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable*</b>	Non-dimmable		

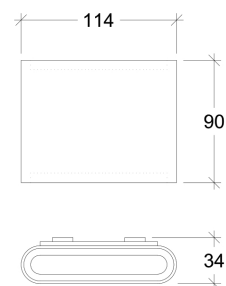

80085.12.\*\*.\*\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80085	12	30 3000 40 4000	6 Opal	<ul style="list-style-type: none"> <li> 10 White</li> <li> 60 Dark Grey</li> <li> A0 Corten</li> </ul> Other finishes available upon request	NDI* Driver included (non-dimmable)

# Laminus Big


80086

GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	2 x 6W	<b>Dimensions</b>	174x34 h90mm
<b>Lumen output</b>	2 x 700	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable*</b>	Non-dimmable		

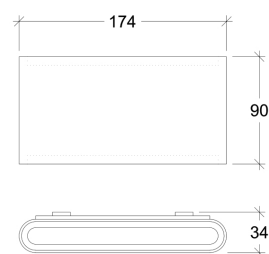

80086.12.\*\*.\*\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80086	12	30 3000 40 4000	6 Opal	<ul style="list-style-type: none"> <li> 10 White</li> <li> 60 Dark Grey</li> <li> AO Corten</li> </ul> <p>Other finishes available upon request</p>	NDI* Driver included (non-dimmable)

Fenestra


80010

GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	30.000 h
<b>IP</b>	54	<b>Cut-out Size</b>	-
<b>Wattage</b>	2 x 3W	<b>Dimensions</b>	173x85 h65mm
<b>Lumen output</b>	700	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Not required		
<b>Dimmable</b>	Non-dimmable		

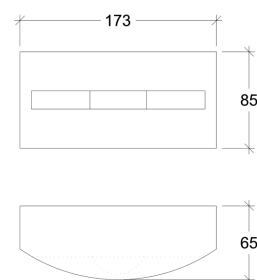

80010.6\*\*.X.\*\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80010	6	30 3000 40 4000	8 Elliptical	○ 10 White ● 60 Antracita	NDI Driver included (non-dimmable)
Other finishes available upon request					




Magicae-ip

80011


GOOD NIGHT

Surface



Installation	Indoor / Outdoor
Mounting Position	Surface
IP	54
Wattage	15W
Lumen output	1180
Connection	230V
Driver	Not required
Dimmable*	Non-dimmable

CRI	>80
Life Time	50.000 h
Cut-out Size	-
Dimensions	Ø80 h45mm
Adjustable	-



80011.15.\*\*.\*.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80011	15	30 3000 40 4000	2 Medium	○ 10 White ● 20 Black	NDI* Driver included (non-dimmable)




Iudice

80008


GOOD NIGHT

Surface / Spike



<b>Installation</b>	Outdoor
<b>Mounting Position</b>	Surface / Spike
<b>IP</b>	65
<b>Wattage</b>	3W
<b>Lumen output</b>	320
<b>Connection</b>	230V
<b>Driver</b>	Not required
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>85
<b>Life Time</b>	30.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø45x78 h100mm
<b>Adjustable</b>	Yes

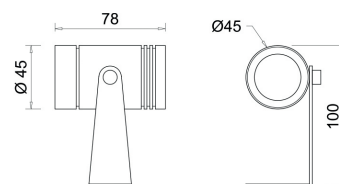

80008.3.30.\*.20

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80008	3	30 3000	<ul style="list-style-type: none"> <li> 1 Narrow 10°</li> <li> 2 Medium 30°</li> </ul>	● 20 Black	NDI* Driver included (non-dimmable)

Cable Length: 5m



80008.A.1.20




Unguis


80031

GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	50.000 h
<b>IP</b>	65	<b>Cut-out Size</b>	-
<b>Wattage</b>	5W	<b>Dimensions</b>	Ø50 h125mm
<b>Lumen output</b>	274	<b>Adjustable</b>	-
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		

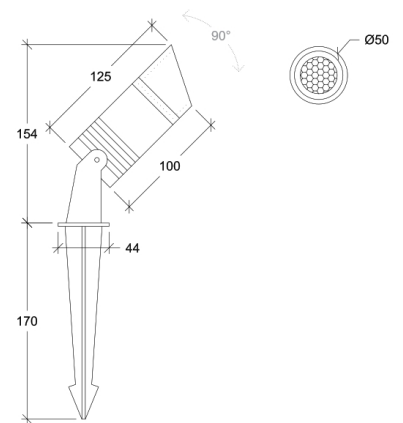

80031.5.\*\*.2.20.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80031	5	30 3000 40 4000	2 Medium 38°	20 Black	NDI* Driver included (non-dimmable)






# Big Unguis

80032


GOOD NIGHT

Surface



<b>Installation</b>	Indoor / Outdoor
<b>Mounting Position</b>	Surface
<b>IP</b>	65
<b>Wattage</b>	9W
<b>Lumen output</b>	570
<b>Connection</b>	230V
<b>Driver</b>	Included built-in
<b>Dimmable*</b>	Non-dimmable

<b>CRI</b>	>80
<b>Life Time</b>	50.000 h
<b>Cut-out Size</b>	-
<b>Dimensions</b>	Ø64 h137mm
<b>Adjustable</b>	-

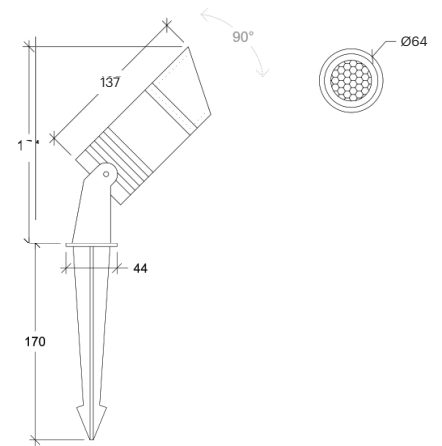

80032.5.\*\*.2.20.NDI

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80032	9	30 3000 40 4000	2 Medium 38°	20 Black	NDI* Driver included (non-dimmable)



# Viceversa-2


80002

GOOD NIGHT



Surface



<b>Installation</b>	Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface	<b>Life Time</b>	50.000 h
<b>IP</b>	65	<b>Cut-out Size</b>	-
<b>Wattage</b>	40W	<b>Dimension</b>	900x90 h74mm
<b>Lumen Output</b>	4100	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	Non-dimmable		



80002.40.30.6.10

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80002	40	30 3000	 6 Opal	 10 White	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request




Tunnel



80003

GOOD NIGHT

Surface / Suspended

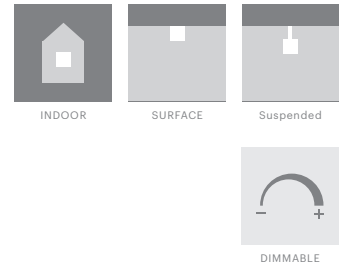

<b>Installation</b>	Outdoor	<b>CRI</b>	>80
<b>Mounting Position</b>	Surface / Suspended	<b>Life Time</b>	50.000 h
<b>IP</b>	67	<b>Cut-out Size</b>	-
<b>Wattage</b>	30	<b>Dimensions</b>	Ø80 900mm
<b>Lumen output</b>	3800	<b>Adjustable</b>	No
<b>Connection</b>	230V		
<b>Driver</b>	Included built-in		
<b>Dimmable*</b>	1-10 V		

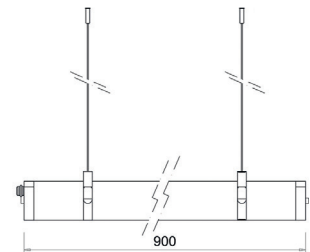

80003.30.30.6.70

Number	W	Colour Temperature	Light Distribution	Finish	Dim
80003	30	30 3000	6 Opal	70 Chrome	<b>NDI*</b> Driver included (non-dimmable) Dimmable driver upon request

Suspended kit included



Transparent version available



MAS DE VALLALTA / PROJECT: DAMIÁN SÁNCHEZ



MAS DE VALLALTA / PROJECT: DAMIÁN SÁNCHEZ

Good Night Lighting Special Products is the result of a passion for light, of a deep knowledge about lighting and a long experience in lights. It comes with the intention to bring good light to all areas, to make them more pleasant and appealing, by adapting to their particular needs and making lighting synonymous with beauty and atmosphere.

We understand our products as quality lighting solutions based on technology, design and awareness of light that only experience can provide. Our lights are carefully selected to meet the requirements that allow us to fulfill our commitment in terms of comfort, quality and guarantee

#### Contact us

Good Night Lighting  
Santiago Rusiñol, 14 nave B5  
Pol. Ind. Can Humet de Dalt  
08213 - Polinyà  
Barcelona

+34 935 285 434  
info@goodnight-lighting.com  
www.goodnight-lighting.com

# GOOD NIGHT

Graphic design  
EXITDESIGN

Product photography  
EXITDESIGN

Good Night assumes no liability or responsibility for any errors or omissions in the content of this catalogue.

Good Night reserves the right to alter any model or characteristics without prior notice.

This catalogue replaces all previous catalogues.

Good Night® is a registred trademark.

[www.goodnight-lighting.com](http://www.goodnight-lighting.com)