

GOOD NIGHT

Lighting Special Products

LUMIK Custom Made



LUMIK Custom Made

LUMIK Wall Light
LUMIK Spotlight
LUMIK Surface
LUMIK Recessed
LUMIK Suspended


Product Elements of the page

Product name

Balnearis
10007


GOOD NIGHT
Recessed

Image



Technical information

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø75 h80mm
Wattage	12W	Dimensions	Ø85 h70mm
Lumen Output	900	Adjustable	No
Connection	300mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmmable drivers on request)		



1000712.**.5.10

Product reference

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10007	12	27 2700 30 3000	5 Asymetric 50°	10 White	NDI* Driver included (non-dimmable) Dimmable driver upon request

Symbols


Range of uses

- Indoor
- Outdoor
- Ceiling Recessed
- Wall Recessed
- Surface
- Suspended
- Track
- Spike
- Ground recessed
- Wall surface

Light distribution

- 1 Narrow
- 2 Medium
- 3 Wide
- 4 Superwide
- 5 Asymetric
- 5D Double asymetric
- 5L Asymetric left
- 5R Asymetric right
- 6 Opal
- 7A 50°x50°
- 7B 70°x70°
- 8 Elyptical
- 9 Zoom

Reference composition

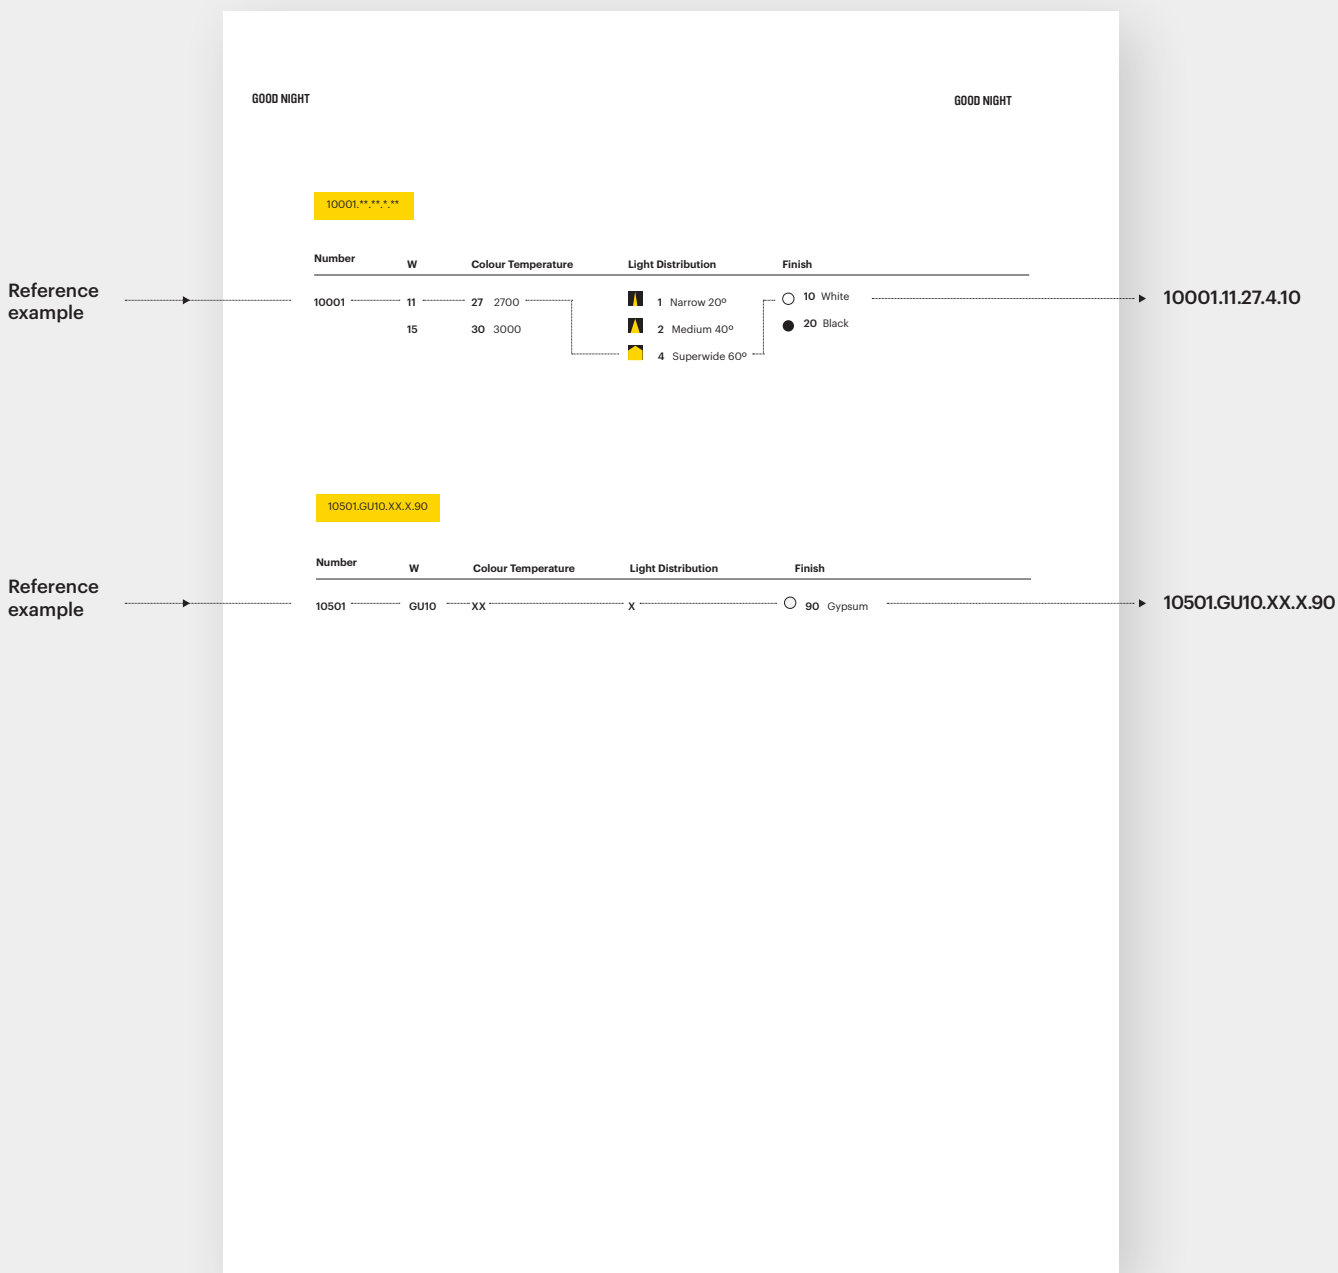

Finishings

- 10 White
- ⊙ 11 White & White
- ◐ 12 White & Black
- ◑ 14 White & Gold
- ◒ 17 White & Chrome
- ◓ 18 White & Copper
- 20 Black
- ◐ 21 Black & White
- ⊙ 22 Black & Black
- ◑ 24 Black & Gold
- ◒ 26 Black & Dark Grey
- ◓ 30 Aluminium
- ◔ 32 Aluminium & Black
- 40 Gold
- 60 Dark Grey
- ◐ 66 Dark Grey & Dark Grey
- ◑ 70 Chrome
- ◒ 80 Inox
- 90 Gypsum

Control

- 📶 Wireless
- 📱 Alexa, Siri, Google
- 📢 Casambi
- 🔌 Dimmable

Special LED

- 🌈 Other colour temperatures
- 🍷 Special LED food and others
- 🌿 Biodynamic
- 🎨 Digital RGB
- 🌈 RGB

LUMIK Custom Made

LUMIK Wall Light



VINEA SQ GU10
page 11



VINEA SQ
DOUBLE 2GU10
page 12



PALPEBRA
page 15



PLANUS
page 16



VINEA ROUND
GU10 page 19




VINEA ROUND
DOUBLE 2 x
GU10 page 21




LUDERE
page 23




LUDO
page 25




STABILUM 650
page 26




STABILUM 930
page 27




STABILUM
1200 page 28



FIRMUS 600
page 29



FIRMUS 900
page 30



FIRMUS 1200
page 31




FIRMUS DOUBLE
600 page 32




FIRMUS DOUBLE
900 page 33




FIRMUS DOUBLE
1200 page 34



IMMOBILIS
DOUBLE 600
page 35



IMMOBILIS
DOUBLE 900
page 36



IMMOBILIS
DOUBLE 1200
page 37



GUTTA MURUS
GU10 page 38

LUMIK Spot Light



BUXA TRACK
page 41



BUXA SURFACE
page 42



CAPIO TRACK
page 43



CAPIO SURFACE
page 44



CETERUS TRACK
page 45



CETERUS
SURFACE
page 46



VERMIS TRACK -
GU10 page 47



VERMIS TRACK
page 48



VERMIS SURFACE
- GU10 page 49



VERMIS SURFACE
page 50



TALUS TRACK
page 51




TALUS SURFACE
page 53



BIG TALUS
TRACK
page 55



BIG TALUS
SURFACE
page 57



CALIX SURFACE
- GU10 page 58



CALIX SURFACE
page 59

LUMIK Custom Made


LUMIK Surface



QUALIA - GU10
page 63



QUALIA-2 -
2GU10 page 64



QUALIA 111 -
GU10 page 65



QUALIA 111-2 -
2GU10
page 66



TUBER 250 -
GU10 page 67



TUBER 250
page 68



TUBER 500 -
GU10 page 69



TUBER 500
page 71



TUBER 750 -
GU10 page 73



TUBER 750
page 74



TRUNCUS 250
- GU10
page 75



TRUNCUS 250
page 76



TRUNCUS 500 -
GU10 page 77



TRUNCUS 500
page 78



TRUNCUS 750
- GU10 page 79



TRUNCUS 750
page 80



BIG TRUNCUS
300 - GU10
page 81



BIG TRUNCUS
300 page 82



BIG TRUNCUS
500 - GU10
page 83



BIG TRUNCUS
500 page 84



BIG TRUNCUS
750 - GU10
page 85



BIG TRUNCUS
750 page 86



TRIGINTA 600
page 87



TRIGINTA 900
page 89



TRIGINTA 1200
page 91



VETUS 600
page 93



VETUS 900
page 95



VETUS 1200
page 97



GUTTA TECTUM
page 98

LUMIK Custom Made

LUMIK Recessed



CUBIC QT1
5454 page 101



CUBIC QT2
5496 page 103



CUBIC Q1 -
GU10 7676
page 105



CUBIC Q2 -
2GU10 76141
page 106



CUBIC QT1
7676 page 107



CUBIC QT2
76141 page 108



CUBIC Q1 - GU10
Trimless 7589
page 109



CUBIC Q2 -
2GU10 Trimless
75165 page 110



CUBIC Q3 -
3GU10 Trimless
75246 page 111



CUBIC Q1 -
GU10 97102
page 113



CUBIC Q2 -
2GU10 97186
page 115



CUBIC Q3 -
3GU10 97270
page 116



CUBIC QT1
97102 page 117



CUBIC Q1 - QR11
177177 page 118



CUBIC Q2 -
2QR1111 177323
page 119



CUBIC Q3 -
3QR1111 177468
page 120



CUBIC QT1
177177
page 121



CUBIC QT2
177323
page 123



CUBIC QT3
177468 page 124



INTUS - GU10
page 125



INTUS QT1
page 127



INTRA - GU10
page 128



INTRA QT1
page 129



ALIPES - GU10
page 130



VIAE QV 1
page 131




ARTUS QV 1
page 132



PAULLULUM QV 1
page 133



TECTUM QV 1
page 134




BIG TECTUM QV 1
page 135



VULTUS QV 1
page 136



BIG VULTUS QV 1
page 137



TIBI QV 1
page 139



DEXTER QV 1
page 141

LUMIK Custom Made

LUMIK Suspended



FILUM 55
page 145



FILUM 55 GU10
page 147



FILUM 90
page 148



FILUM 90 GU10
page 149



FILUM 120
GU10 page 151




FILUM 120
page 153




FILUM 2550
page 154




FILUM 2525
page 155



FILUM 2575
page 157



QUATTUOR 600
page 159



QUATTUOR
900 page 161




QUATTUOR
1200 page 162



PASTILLUM
FARTUM 600
page 163



PASTILLUM
FARTUM 900
page 165



PASTILLUM
FARTUM 1200
page 167



QUINQUE 600
page 169



QUINQUE 900
page 171




QUINQUE 1200
page 172



GUTTA
PENDULUS
GU10 page 173



NOLA GUTTA
370 page 175



NOLA GUTTA
300 page 177



NOLA SICCO
3927 page 179



NOLA BASIC
3716 page 180



NOLA BASIC
1608 page 181



NOLA CONUS
1517 page 182



NOLA CONUS
2527 page 183



NOLA CLASSIC
3517 page 184



NOLA CLASSIC
2813 page 185



NOLA
INDUSTRIAE
4726 page 187



NOLA NORDIC
4619 page 189



NOLA BONN
2322 page 191



NOLA CAUPONA
1616 page 193



NOLA CAUPONA
2722 page 194



NOLA CAUPONA
3127 page 195



NOLA SINA 5217
page 197



NOLA VOLANS
3216 page 199

LUMIK Wall Light


- 11 VINEA SQ GU10
- 12 VINEA SQ DOUBLE 2GU10
- 15 PALPEBRA
- 16 PLANUS
- 19 VINEA ROUND GU10
- 21 VINEA ROUND DOUBLE 2 x GU10
- 23 LUDERE
- 25 LUDO
- 26 STABULUM 650
- 27 STABULUM 930
- 28 STABULUM 1200
- 29 FIRMUS 600
- 30 FIRMUS 900
- 31 FIRMUS 1200
- 32 FIRMUS DOUBLE 600
- 33 FIRMUS DOUBLE 900
- 34 FIRMUS DOUBLE 1200
- 35 IMMOBILIS DOUBLE 600
- 36 IMMOBILIS DOUBLE 900
- 37 IMMOBILIS DOUBLE 1200
- 38 GUTTA MURUS GU10

VINEA SQ GU10

LKA1 01



GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	60x60 h97mm
Adjustable	No

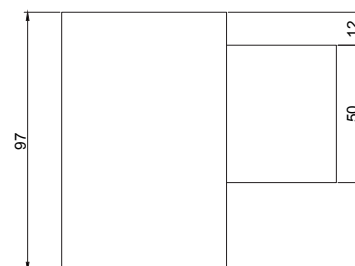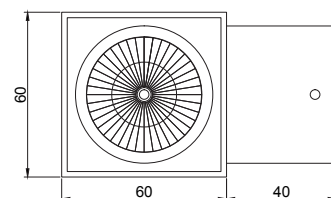

LKA101.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA101	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome <p>RA RAL Chart</p>




VINEA SQ DOUBLE 2GU10

LKA1 02 UP & DOWN


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2xGU10
Lumen output	2xGU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	60x100 h180mm
Adjustable	No

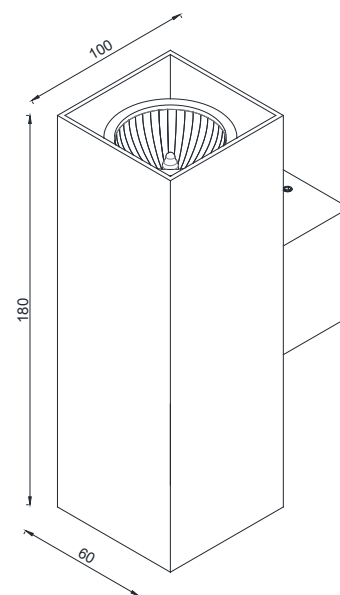

LKA102.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA102	2xGU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




PALPEBRA


LKA2 01

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 80
Mounting Position	Surface	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	1W	Dimensions	100x100 h48mm
Lumen output	120	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	No		

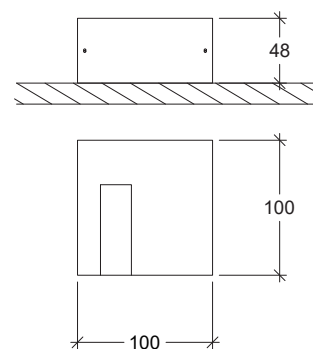

LKA201.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKA201	1	27 2700 30 3000	5 Asymmetric	<ul style="list-style-type: none"> <li style="width: 50%;">○ 10 White <li style="width: 50%;">● MO Metallic Copper <li style="width: 50%;">● 20 Black <li style="width: 50%;">● NO Metallic Gold <li style="width: 50%;">● 40 Gold <li style="width: 50%;">● PO Metallic Chrome <li style="width: 50%;">● CO Silver <li style="width: 50%;">RA RAL Chart <li style="width: 50%;">● BO Copper

PLANUS

LKA3 01 UP & DOWN


GOOD NIGHT

Surface




Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2 x 4W
Lumen output	2 x 695
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 B10 72.000 h
Cut-out Size	-
Dimensions	160x150 h40mm
Adjustable	No

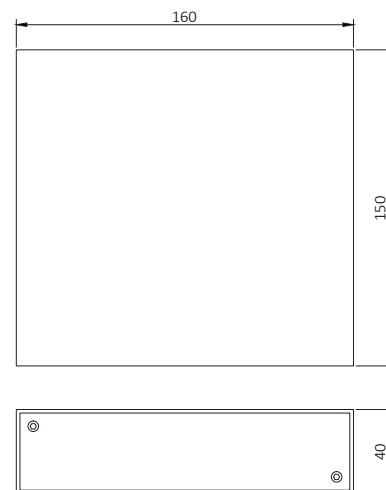

LKA301.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKA301	8	27 2700	6 Opal 120° (Up & Down)	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

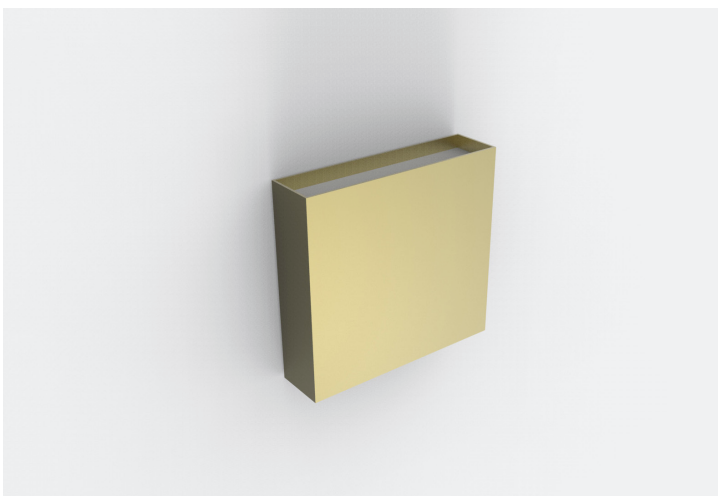






VINEA ROUND GU10

LKA4 01



GOOD NIGHT

Surface

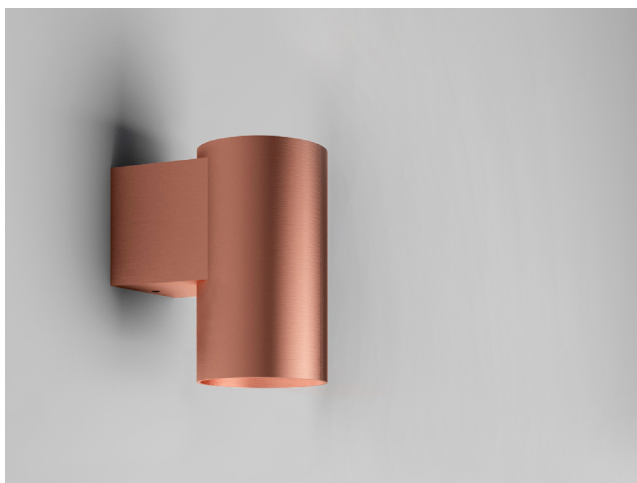

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp


CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x89 h97mm
Adjustable	No

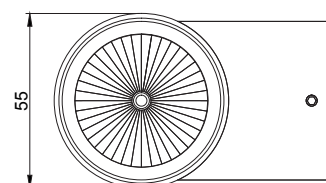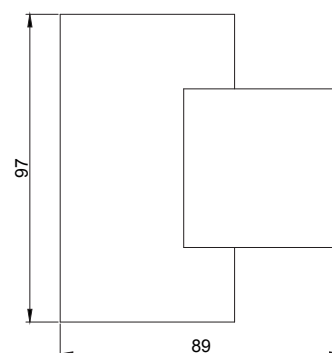

LKA401.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA401	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome

RA RAL Chart

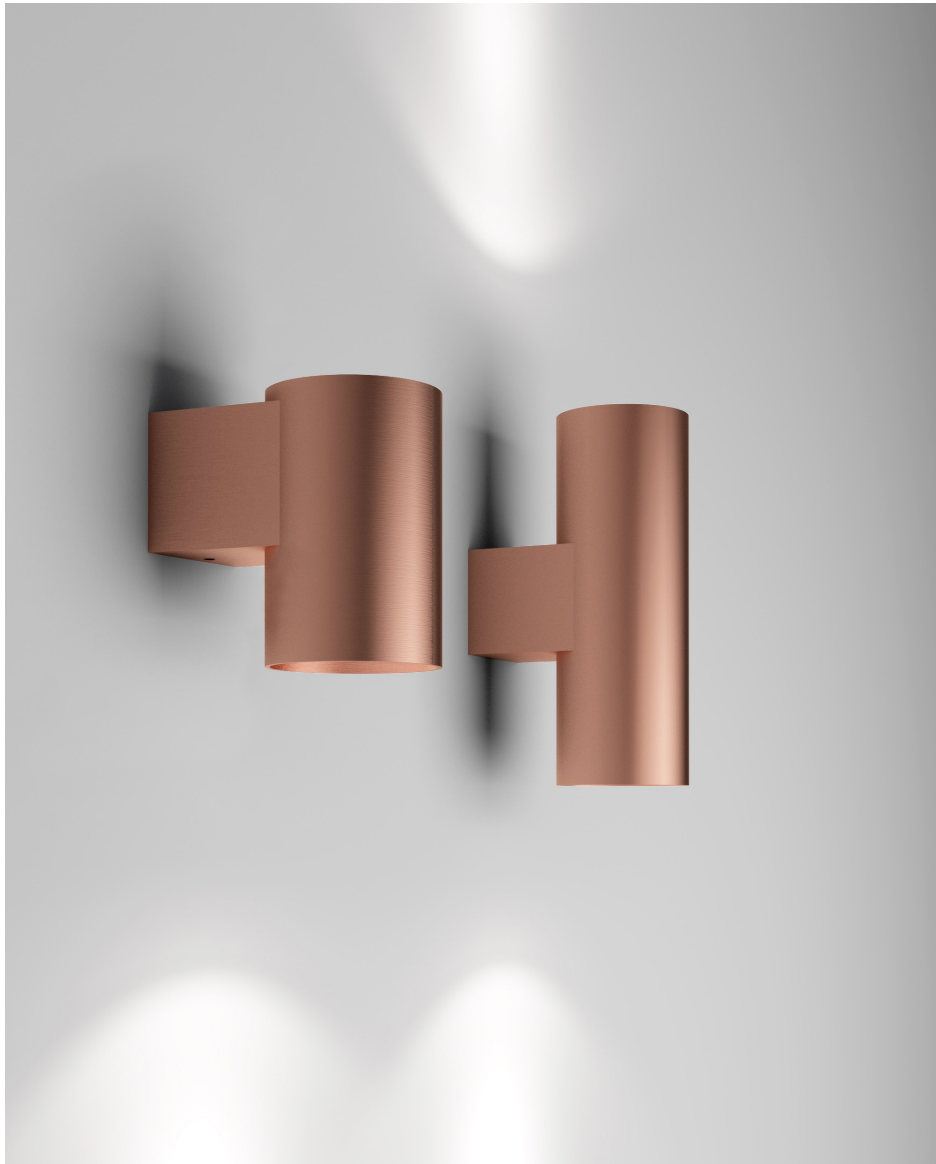


VINEA ROUND DOUBLE 2 x GU10

LKA4 02



GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2xGU10
Lumen output	2xGU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x89 h175mm
Adjustable	No

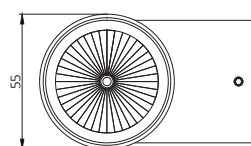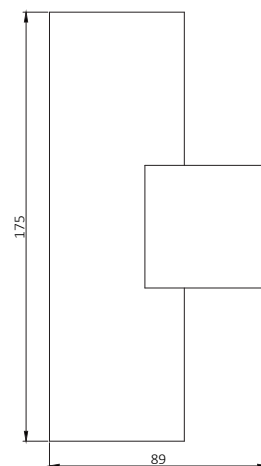

LKA402.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA402	2xGU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome <p>RA RAL Chart</p>




LUDERE


LKA5 01

GOOD NIGHT

Surface

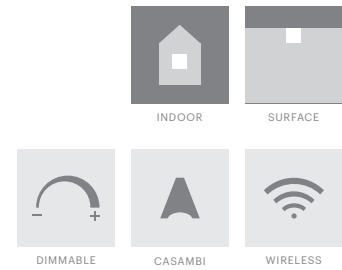

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	7W	Dimensions	620x200 h70mm
Lumen output	560	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

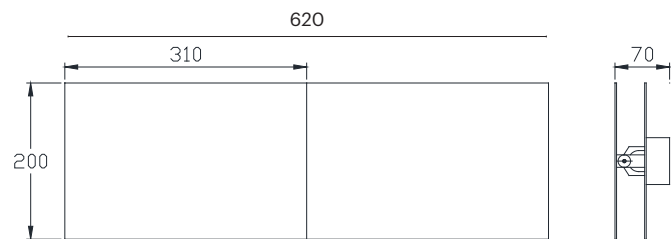

LKA501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKA501	7	27 2700	6 Opal 120° (Up / Down)	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	




LUDO


LKA5 O2

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	40.000 h
IP	20	Cut-out Size	-
Wattage	7W	Dimensions	620x200 h70mm
Lumen output	560	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

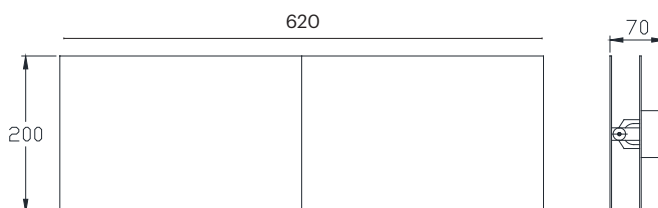

LKA502.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKA502	7	27 2700	6 Opal 120° (Up / Down)	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	





STABULUM 650

LKA6 22 646MM


GOOD NIGHT

Surface

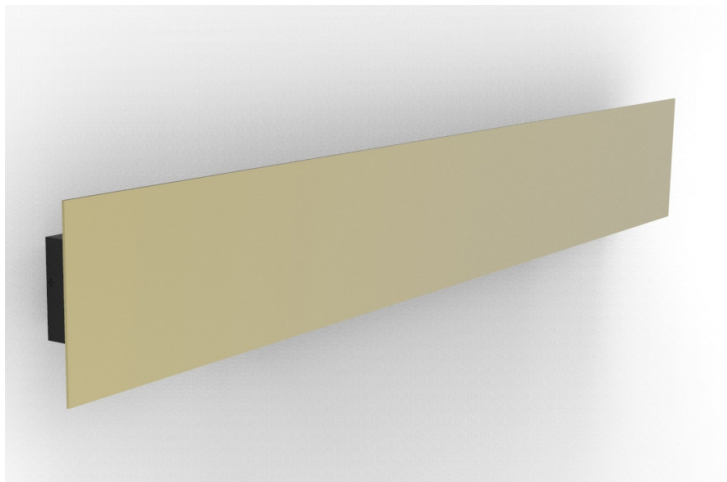

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	8W 12W 18W
Lumen output	1400 2000 2700
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	646x58,5 h125mm
Adjustable	No

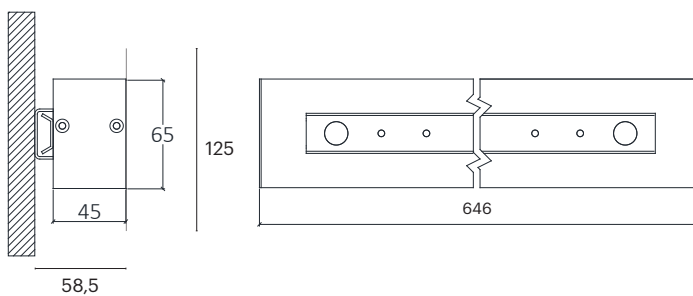

LKA622.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKA622	8	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	18	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	





STABILUM 930

LKA6 23 926MM


GOOD NIGHT

Surface

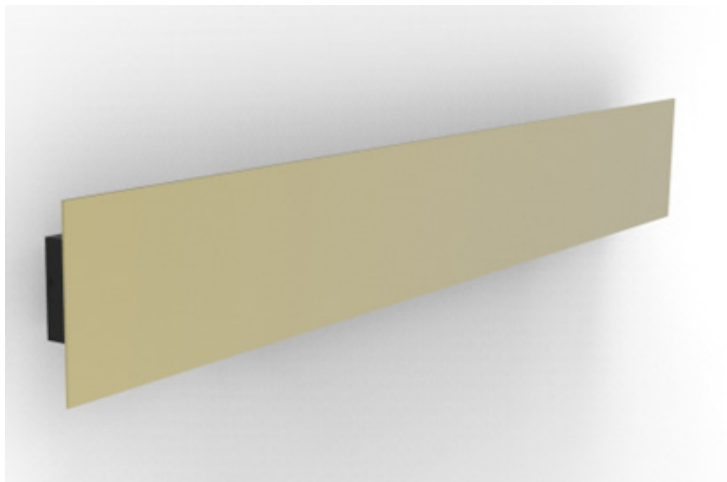

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 18W 28W
Lumen output	2300 3200 4300
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	926x58,5 h125mm
Adjustable	No

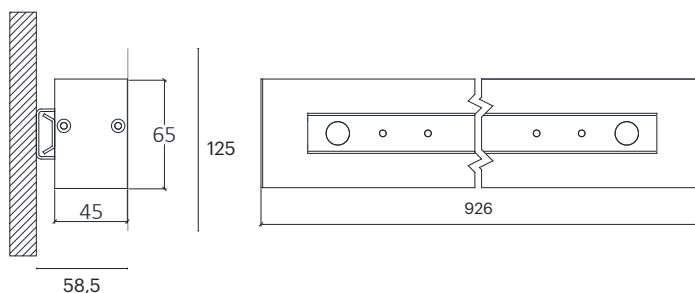

LKA222.**.**.**



Number	W	Colour Temperature	Light Distribution	Finish
LKA222	12	27 2700	6 Opal 120°	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper
	18	30 3000		<ul style="list-style-type: none"> ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome
	28	40 4000		<p>RA RAL Chart</p>

STABULUM 1200

LKA6 24 1206 MM


GOOD NIGHT

Surface

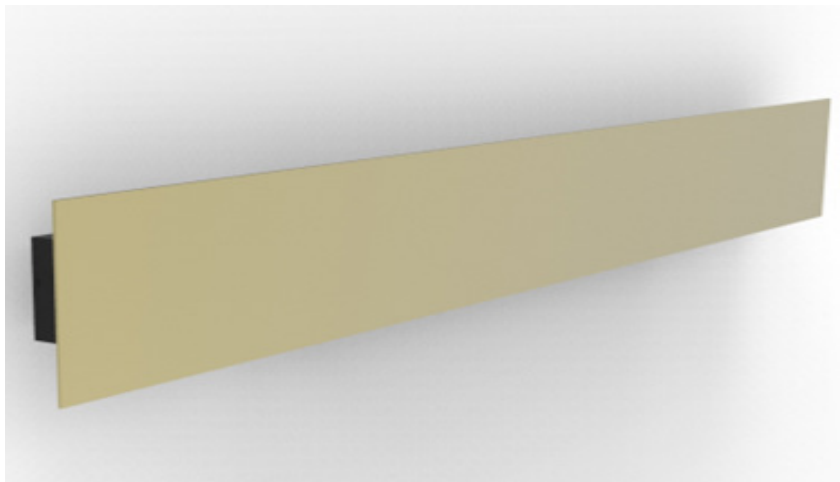

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	16W 24W 35W
Lumen output	3000 4200 5700
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1206x58,5 h125mm
Adjustable	No

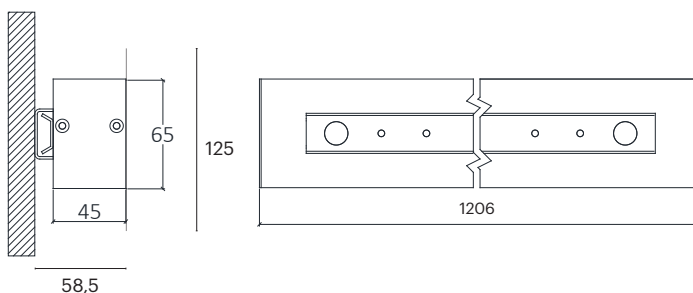

LKA624.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKA624	16	27 2700	6 Opal 120°	<ul style="list-style-type: none"> 10 White 20 Black 40 Gold CO Silver BO Copper
	24	30 3000		<ul style="list-style-type: none"> MO Metallic Copper NO Metallic Gold PO Metallic Chrome
	35	40 4000		<p>RA RAL Chart</p>

FIRMUS 600

LKA6 10 586MM


GOOD NIGHT

Surface

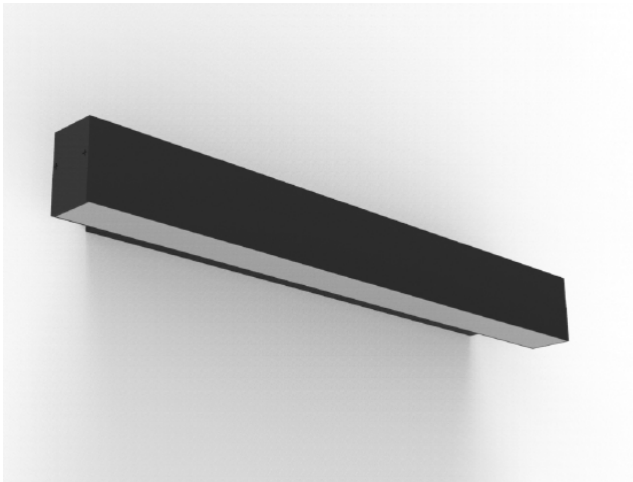


Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	8W 12W 18W
Lumen output	1400 2000 2700
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	586x78,5 h65mm
Adjustable	No

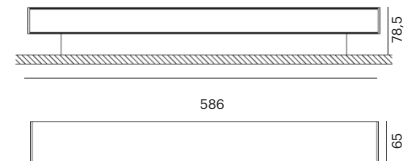

LKA610.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA610	8	27 2700	6 Opal 120°	10 White MO Metallic Copper
	12	30 3000		20 Black NO Metallic Gold
	18	40 4000		40 Gold PO Metallic Chrome
				CO Silver RA RAL Chart
				BO Copper


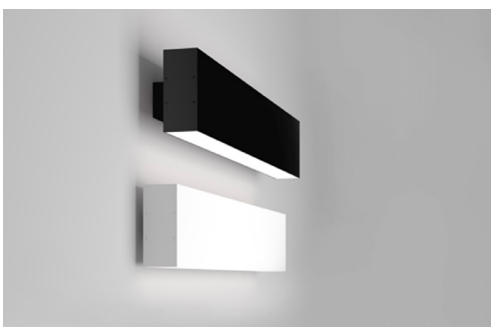


FIRMUS 900

LKA6 11 866MM


GOOD NIGHT

Surface

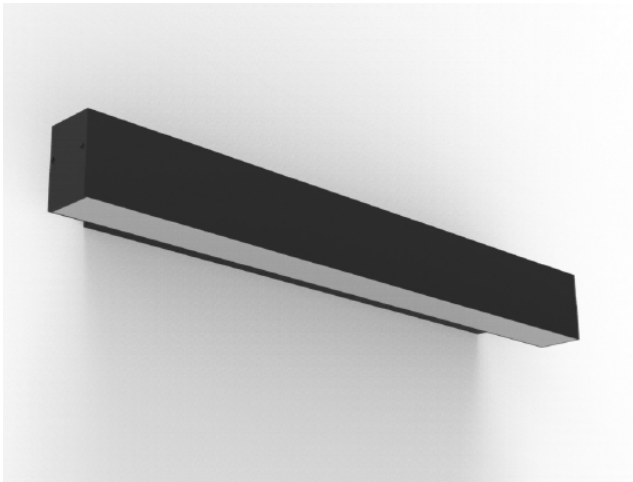

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 18W 26W
Lumen output	2100 3000 4100
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x78,5 h65mm
Adjustable	No

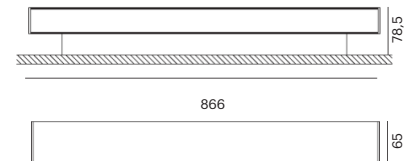

LKA611.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKA611	12	27 2700	6 Opal 120°	10 White MO Metallic Copper
	18	30 3000		20 Black NO Metallic Gold
	26	40 4000		40 Gold PO Metallic Chrome
				CO Silver RA RAL Chart
				BO Copper

FIRMUS 1200

LKA6 12 1146MM

GOOD NIGHT

Surface

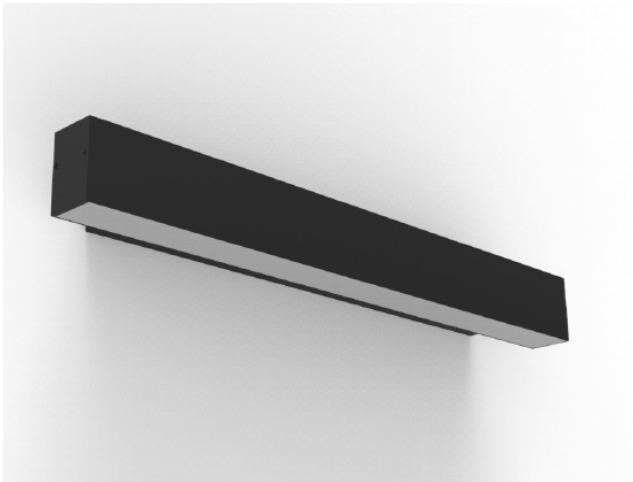

INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	16W 24W 35W
Lumen output	2800 4000 5400
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1146x78,5 h65mm
Adjustable	No

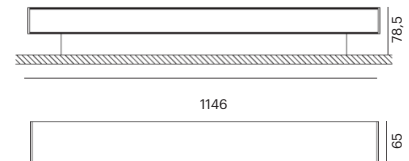

LKA612.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish										
LKA612	16	27 2700	6 Opal 120°	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														
	24	30 3000												
	35	40 4000												

FIRMUS DOUBLE 600


LKA7 16 586MM UP & DOWN

GOOD NIGHT

Surface

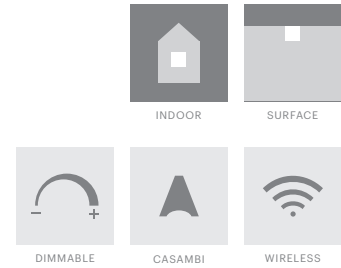

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	2 x 8W 2 x 12W 2 x 18W	Dimensions	586x54,5 h100mm
Lumen output	2 x 1400 2 x 2000 2 x 2700	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

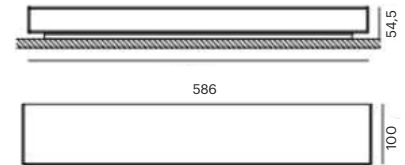

LKA716.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKA716	16	27 2700	6 Opal 120° (Up & Down)	○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper
	24	30 3000		● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome
	36	40 4000		RA RAL Chart

FIRMUS DOUBLE 900


LKA7 17 866MM UP & DOWN

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	2 x 12W 2 x 18W 2 x 26W	Dimensions	866x54,5 h100mm
Lumen output	2 x 2100 2 x 3000 2 x 4100	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

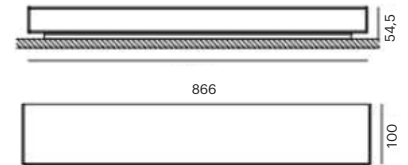

LKA717.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKA717	24	27 2700	6 Opal 120° (Up & Down)	10 White	MO Metallic Copper
	36	30 3000		20 Black	NO Metallic Gold
	52	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

FIRMUS DOUBLE 1200


LKA7 18 1146MM UP & DOWN

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	2 x 16W 2 x 24W 2 x 34W	Dimensions	1146x54,5 h100mm
Lumen output	2 x 2800 2 x 4000 2 x 5400	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

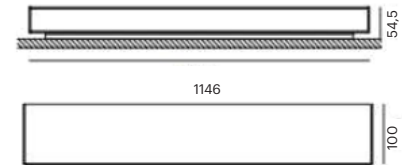

LKA718.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA718	32	27 2700		10 White 20 Black 40 Gold CO Silver BO Copper
	42	30 3000		MO Metallic Copper NO Metallic Gold PO Metallic Chrome
	68	40 4000		RA RAL Chart





IMMOBILIS DOUBLE 600


LKA7 25 586MM UP & DOWN

GOOD NIGHT

Surface

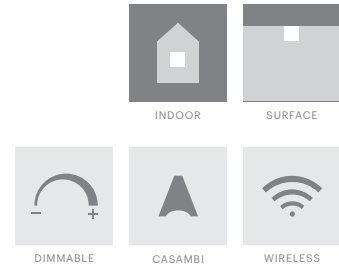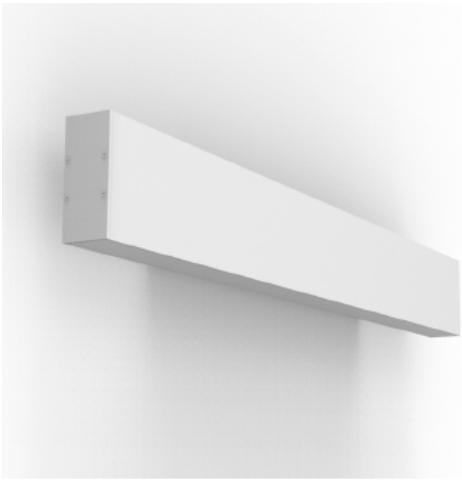

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	2 x 8W 2 x 12W 2 x 18W	Dimensions	586x78,5 h100mm
Lumen output	2 x 1400 2 x 2000 2 x 2700	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

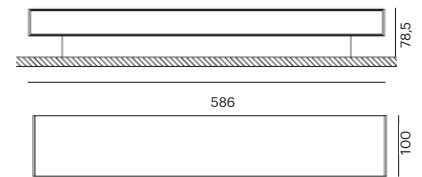

LKA725.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKA725	16	27 2700	6 Opal 120° (Up & Down)	10 White	MO Metallic Copper
	24	30 3000		20 Black	NO Metallic Gold
	36	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

IMMOBILIS DOUBLE 900

LKA7 26 866MM UP & DOWN

GOOD NIGHT

Surface

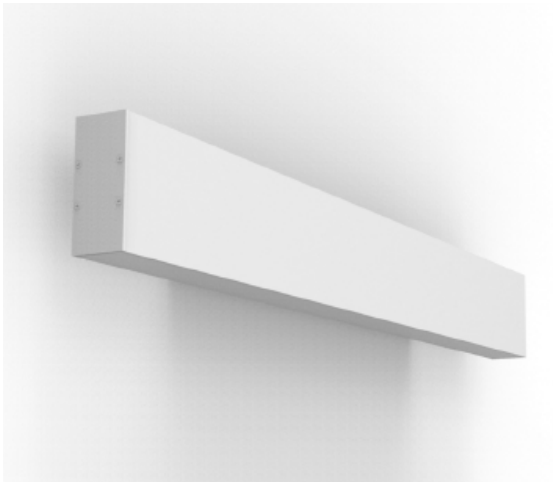

INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2 x 12W 2 x 18W 2 x 26W
Lumen output	2 x 2100 2 x 3000 2 x 4100
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x78,5 h100mm
Adjustable	No

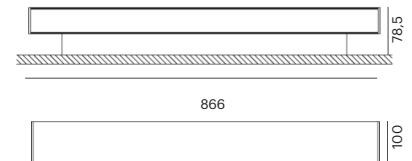

LKA726.**.**.**



Number	W	Colour Temperature	Light Distribution	Finish
LKA726	24	27 2700	6 Opal 120° (Up & Down)	○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper
	36	30 3000		● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome
	52	40 4000		RA RAL Chart

IMMOBILIS DOUBLE 1200


LKA7 27 1146MM UP & DOWN

GOOD NIGHT

Surface

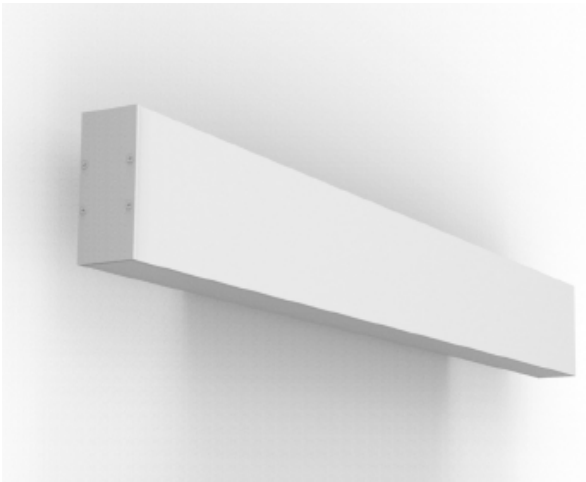

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	2 x 16W 2 x 24W 2 x 34W	Dimensions	1146x78,5 h100mm
Lumen output	2 x 2800 2 x 4000 2 x 5400	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

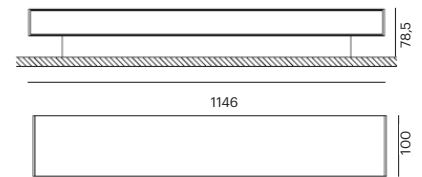

LKA727.**.**.**



Number	W	Colour Temperature	Light Distribution	Finish	
LKA727	32	27 2700	6 Opal 120° (Up & Down)	10 White	MO Metallic Copper
	48	30 3000		20 Black	NO Metallic Gold
	68	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

GUTTA MURUS GU10

LKA5 01


GOOD NIGHT

Surface

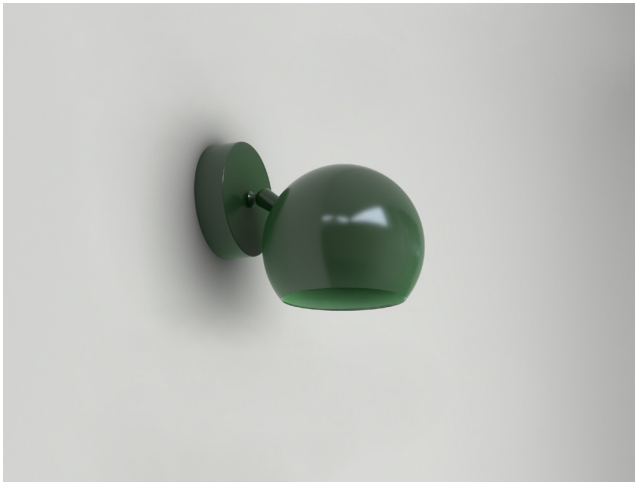

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø120x162 h160mm
Adjustable	Yes

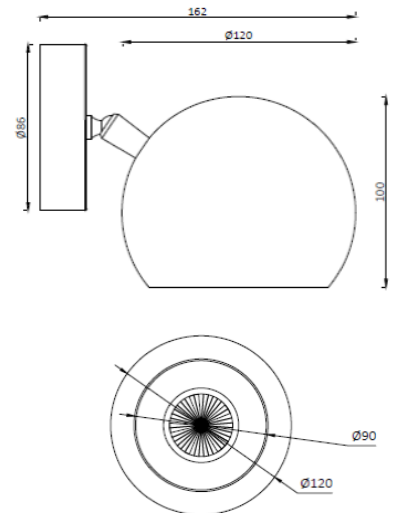

LKA501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKA501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome <p>RA RAL Chart</p>



LUMIK Spot Light


41	BUXA TRACK
42	BUXA SURFACE
43	CAPIO TRACK
44	CAPIO SURFACE
45	CETERUS TRACK
46	CETERUS SURFACE
47	VERMIS TRACK – GU10
48	VERMIS TRACK
49	VERMIS SURFACE – GU10
50	VERMIS SURFACE
51	TALUS TRACK
53	TALUS SURFACE
55	BIG TALUS TRACK
57	BIG TALUS SURFACE
58	CALIX SURFACE – GU10
59	CALIX SURFACE

BUXA TRACK

LKP1 03


GOOD NIGHT

Track

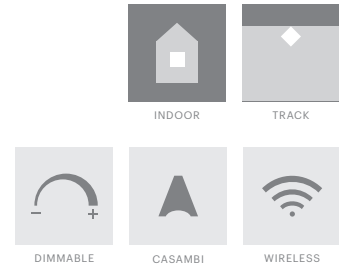


Installation	Indoor		
Mounting Position	Track		
IP	20		
Wattage	12W	17W	24W
Lumen output	2100	2900	3900
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø90x105 h150mm
Adjustable	Yes

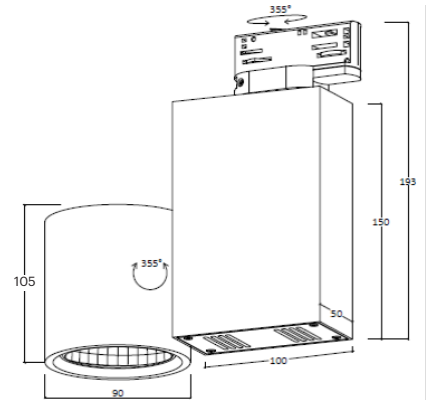

LKP103.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP103	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	


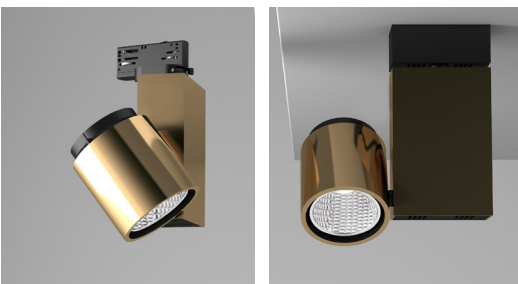


BUXA SURFACE

LKP1 04


GOOD NIGHT

Surface

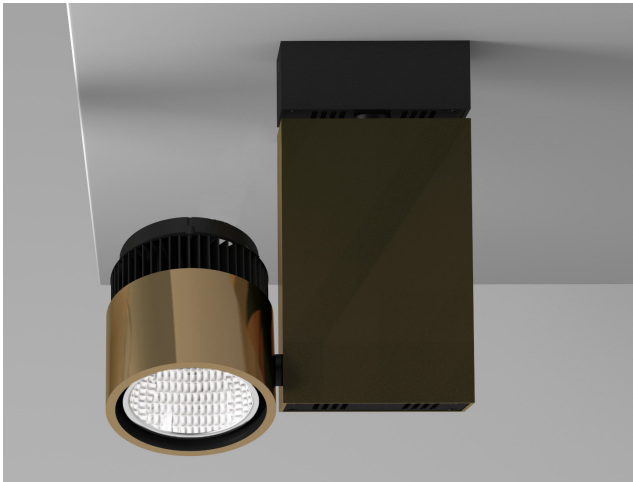

Installation	Indoor		
Mounting Position	Surface		
IP	20		
Wattage	12W	17W	24W
Lumen output	2100	2900	3900
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø90x105 h190mm
Adjustable	Yes

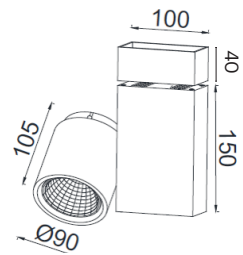

LKP104.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP104	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	




CAPIO TRACK


LKP1 05

GOOD NIGHT

Track



Installation	Indoor	CRI	> 90
Mounting Position	Track	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø90x107 h150mm
Lumen output	2100 2900 3900	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

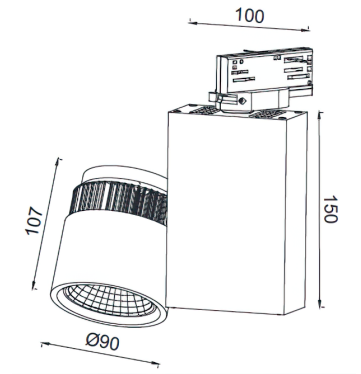

LKP105.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP105	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

CAPIO SURFACE

LKP1 06


GOOD NIGHT

Surface



Installation	Indoor		
Mounting Position	Surface		
IP	20		
Wattage	12W	17W	24W
Lumen output	2100	2900	3900
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø90x107 h190mm
Adjustable	Yes

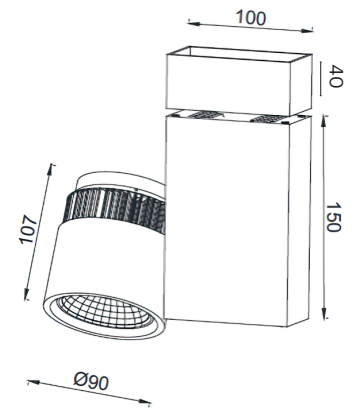

LKP106.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP106	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

CETERUS TRACK


LKP1 07

GOOD NIGHT

Track

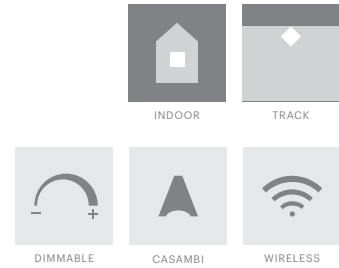

Installation	Indoor	CRI	> 90
Mounting Position	Track	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120x128 h150mm
Lumen output	2100 2900 3900	Adjustable	Yes
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

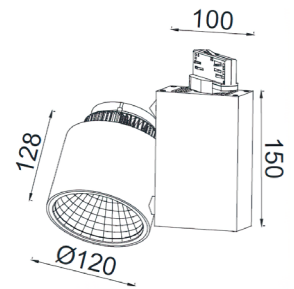

LKP107.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP107	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

CETERUS SURFACE


LKP1 08

GOOD NIGHT

Surface




Installation	Indoor			CRI	> 90
Mounting Position	Surface			Life Time	L80 / B10 50.000 h
IP	20			Cut-out Size	-
Wattage	12W	17W	24W	Dimensions	Ø120x128 h190mm
Lumen output	2100	2900	3900	Adjustable	Yes
Connection	230V				
Driver	Included				
Dimmable	DALI, Push / Driver on request				

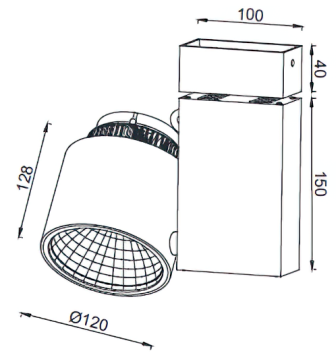

LKP108.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP108	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

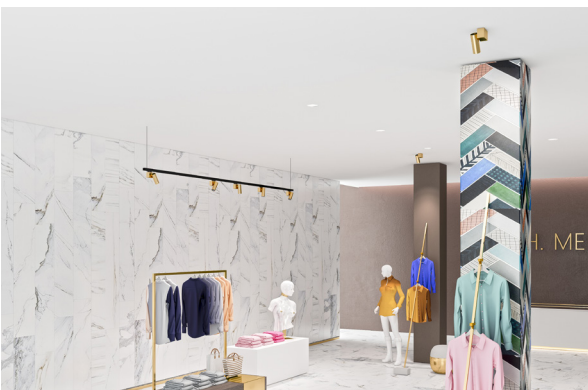


VERMIS TRACK – GU10

LKP2 01 GU10


GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x250 h105mm
Adjustable	Yes

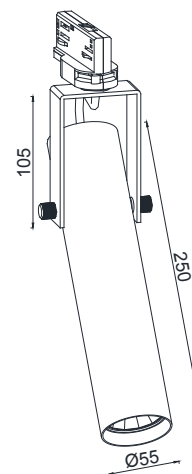

LKP201.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKP201	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




VERMIS TRACK

LKP2 01


GOOD NIGHT

Track

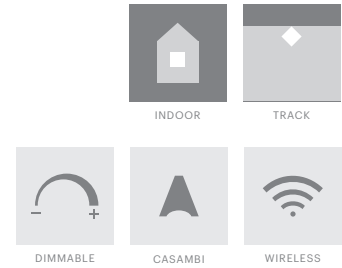

Installation	Indoor
Mounting Position	Track
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55x250 h105mm
Adjustable	Yes

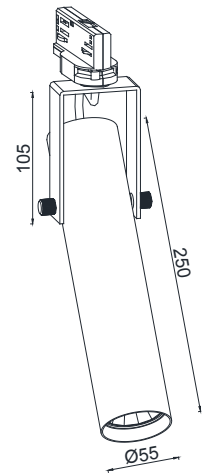

LKP201.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKP201	5	27 2700	1 Narrow 12°	○ 10 White
	9	30 3000	2 Medium 24°	● 20 Black
		40 4000	3 Wide 36°	● 40 Gold
				● CO Silver
				● BO Copper
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				RA RAL Chart

VERMIS SURFACE – GU10

LKP2 02 GU10


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55x250 h130mm
Adjustable	Yes

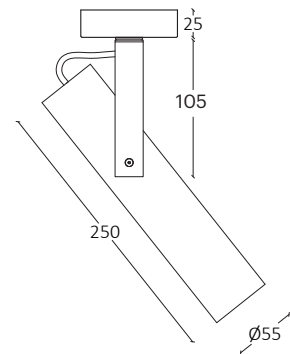

LKP202.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKP102	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

VERMIS SURFACE

LKP2 02


GOOD NIGHT

Surface

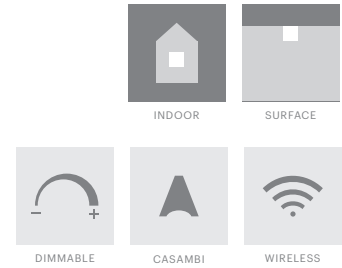

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55x250 h130mm
Adjustable	Yes

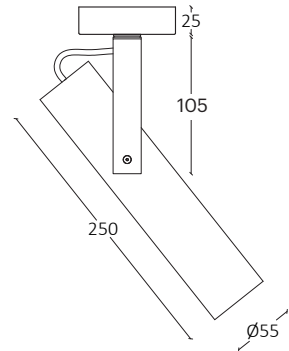

LKP202.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKP202	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	9	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	

TALUS TRACK

LKP2 03


GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø95x250 h105mm
Adjustable	Yes

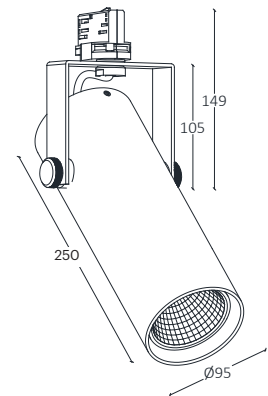

LKP203.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP203	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	






TALUS SURFACE

LKP2 04


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø95x250 h107mm
Adjustable	Yes

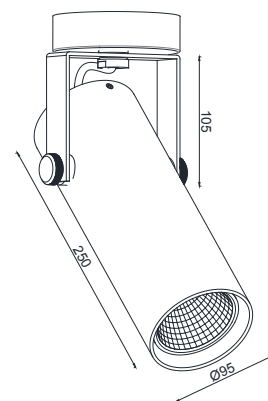

LKP204.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP204	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	






BIG TALUS TRACK

LKP4 01


GOOD NIGHT

Track



Installation	Indoor
Mounting Position	Track
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø120x220 h135mm
Adjustable	Yes

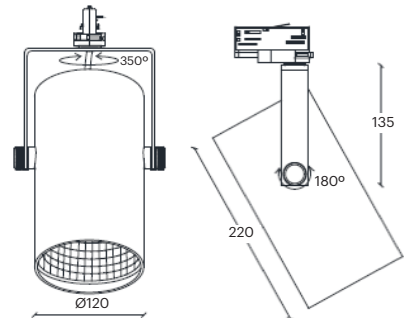

LKP401.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP401	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	




BIG TALUS SURFACE

LKP4 02


GOOD NIGHT

Surface

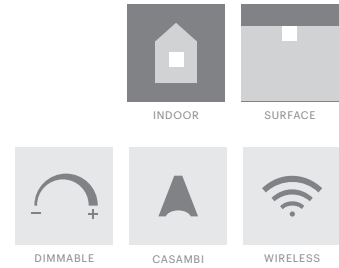

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø120 h220mm
Adjustable	Yes

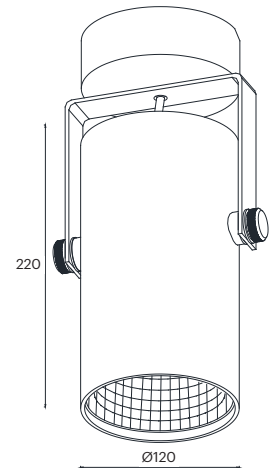

LKP402.**.*.*.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP402	12	27 2700	1 Narrow 15°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 25°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	





CALIX SURFACE – GU10

LKP5 01 GU10


GOOD NIGHT

Surface

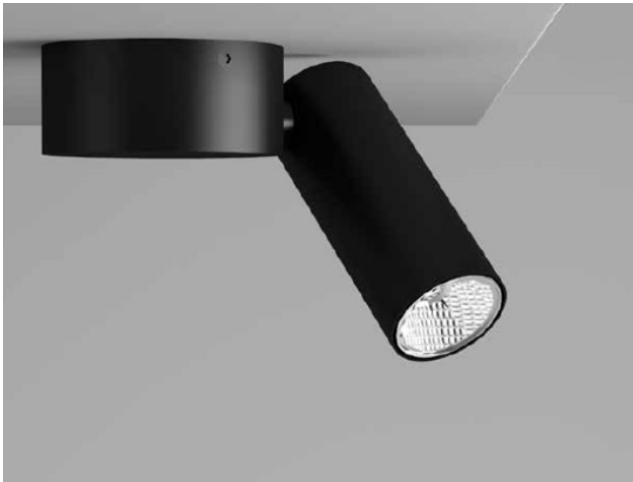

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h160mm / Ø105 h50mm
Adjustable	Yes

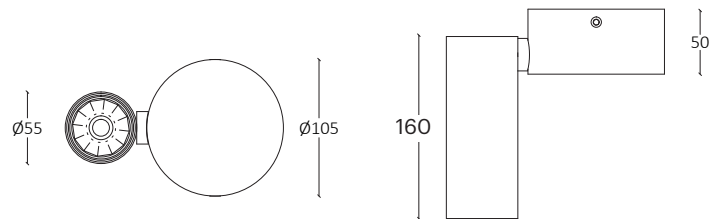

LKP501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKP501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




CALIX SURFACE

LKP5 01


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	5W 8W
Lumen output	700 1200
Connection	230V
Driver	Included
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø55 h160mm / Ø105 h50mm
Adjustable	Yes

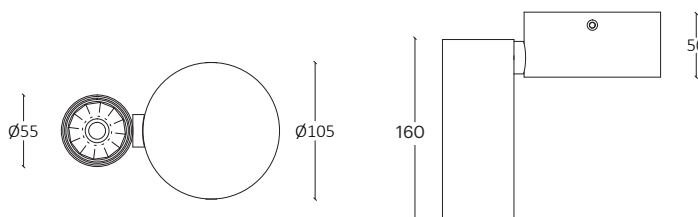

LKP501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKP501	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	8	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	





LUMIK Surface


- 63 QUALIA – GU10
- 64 QUALIA-2 – 2GU10
- 65 QUALIA 111 – GU10
- 66 QUALIA 111-2 – 2GU10
- 67 TUBER 250 – GU10
- 68 TUBER 250
- 69 TUBER 500 – GU10
- 71 TUBER 500
- 73 TUBER 750 – GU10
- 74 TUBER 750
- 75 TRUNCUS 250 – GU10
- 76 TRUNCUS 250
- 77 TRUNCUS 500 – GU10
- 78 TRUNCUS 500
- 79 TRUNCUS 750 – GU10
- 80 TRUNCUS 750
- 81 BIG TRUNCUS 300 – GU10
- 82 BIG TRUNCUS 300
- 83 BIG TRUNCUS 500 – GU10
- 84 BIG TRUNCUS 500
- 85 BIG TRUNCUS 750 – GU10
- 86 BIG TRUNCUS 750
- 87 TRIGINTA 600
- 89 TRIGINTA 900
- 91 TRIGINTA 1200
- 93 VETUS 600
- 95 VETUS 900
- 97 VETUS 1200
- 98 GUTTA TECTUM

QUALIA – GU10

LKT1 01


GOOD NIGHT

Surface

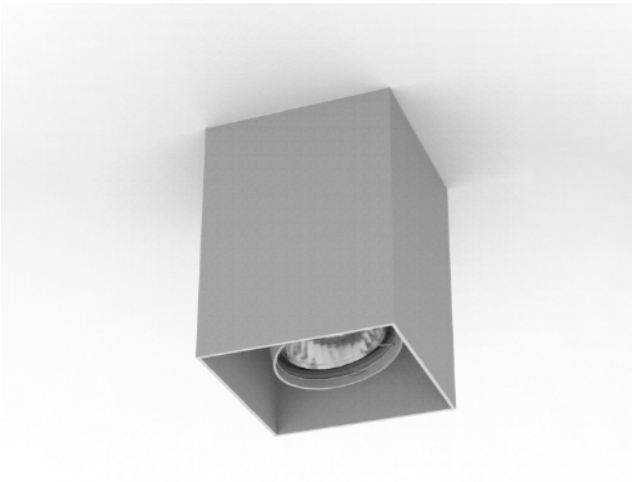

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	80x80 h105mm
Adjustable	Yes

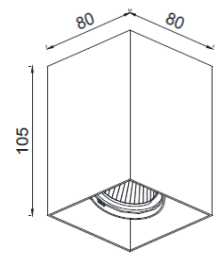

LKT101.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT101	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




QUALIA-2 – 2GU10


LKT1 02

GOOD NIGHT

Surface



Installation	Indoor	CRI	GU10
Mounting Position	Surface	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	2 x GU10	Dimensions	157x80 h105mm
Lumen output	2 x GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKT102.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT102	2 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




QUALIA 111 – GU10

LKT1 03


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	QR111 GU10
Lumen output	QR111 GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 GU10
Life Time	QR111 GU10
Cut-out Size	-
Dimensions	150x150 h150mm
Adjustable	Yes

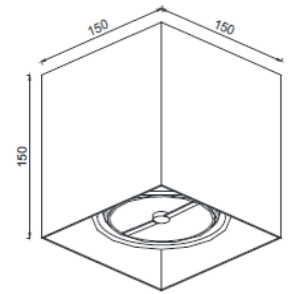

LKT103.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT103	QR111 GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




QUALIA 111-2 – 2GU10

LKT1 04


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	2 x QR111 GU10
Lumen output	2 x QR111 GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 GU10
Life Time	QR111 GU10
Cut-out Size	-
Dimensions	300x150 h150mm
Adjustable	Yes

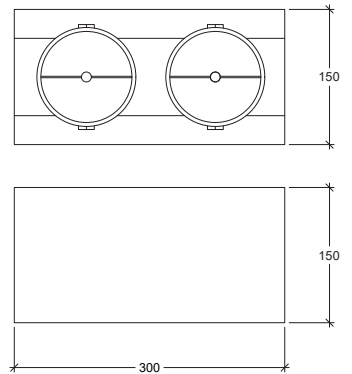

LKT104.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT104	2 x QR111 GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TUBER 250 – GU10

LKT2 01


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h250mm
Adjustable	No

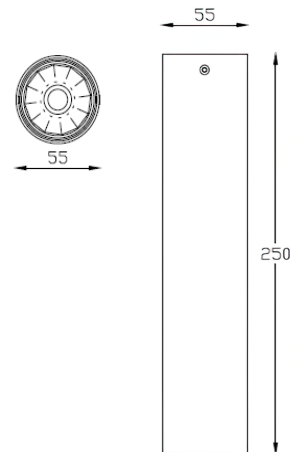

LKT201.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT201	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TUBER 250


LKT2 01

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	5W 8W	Dimensions	Ø55 h250mm
Lumen output	700 1200	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

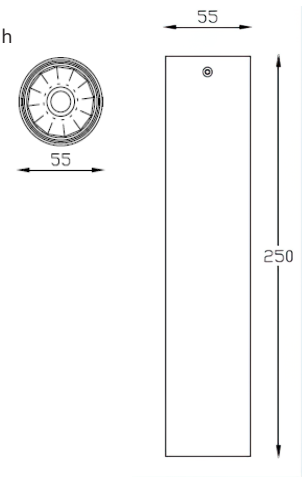

LKT201.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT201	5	27 2700	1 Narrow 12°	10 White	MO Metallic Copper
	8	30 3000	2 Medium 24°	20 Black	NO Metallic Gold
		40 4000	3 Wide 36°	40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	




TUBER 500 – GU10

LKT2 02


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h500mm
Adjustable	No

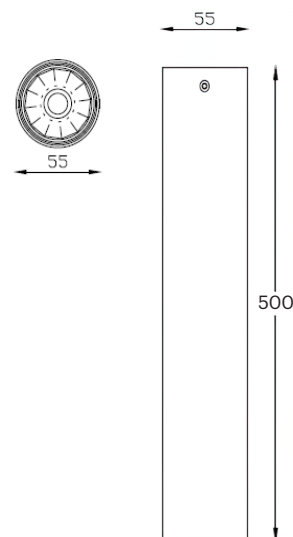

LKT202.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT202	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart






TUBER 500


LKT2 02

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	5W 8W	Dimensions	Ø55 h500mm
Lumen output	700 1200	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

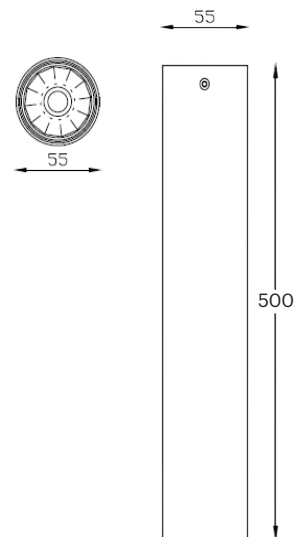

LKT202.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT202	5	27 2700	1 Narrow 15°	10 White	MO Metallic Copper
	8	30 3000	2 Medium 25°	20 Black	NO Metallic Gold
		40 4000	3 Wide 40°	40 Gold	PO Metallic Chrome
			4 Superwide 60°	CO Silver	RA RAL Chart
				BO Copper	






TUBER 750 – GU10

LKT2 03


GOOD NIGHT

Surface

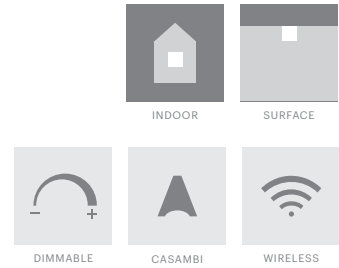

Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø55 h750mm
Adjustable	No

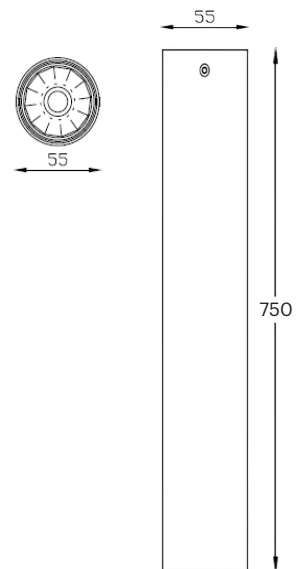

LKT203.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT203	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TUBER 750


LKT2 03

GOOD NIGHT

Surface

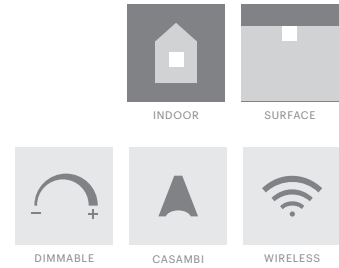

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	9W 12W	Dimensions	Ø55 h750mm
Lumen output	700 1200	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

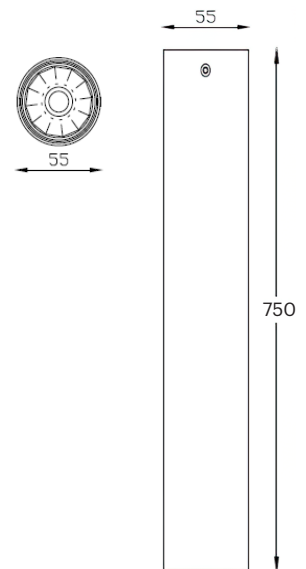

LKT203.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT203	9	27 2700	1 Narrow 12°	10 White	MO Metallic Copper
	12	30 3000	2 Medium 24°	20 Black	NO Metallic Gold
		40 4000	3 Wide 36°	40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	




TRUNCUS 250 – GU10

LKT2 04


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø95 h250mm
Adjustable	No

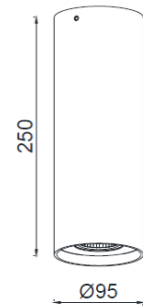

LKT204.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT204	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TRUNCUS 250


LKT2 04

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø95 h250mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		



LKT204.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT204	12	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	




TRUNCUS 500 – GU10

LKT2 05


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø95 h500mm
Adjustable	No

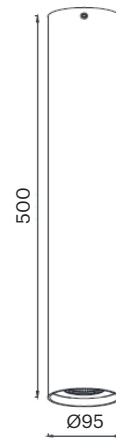

LKT205.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT205	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TRUNCUS 500


LKT2 05

GOOD NIGHT


Surface

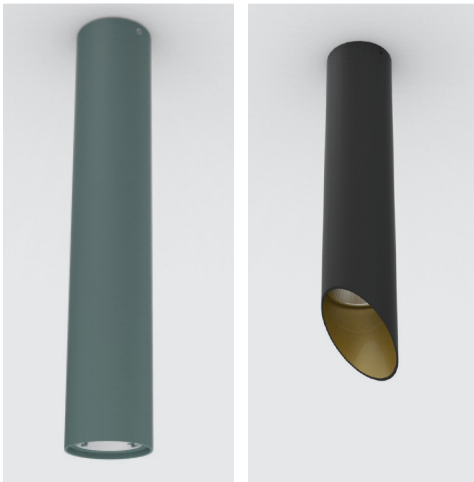

Edge cut in angle on request



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø95 h500mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

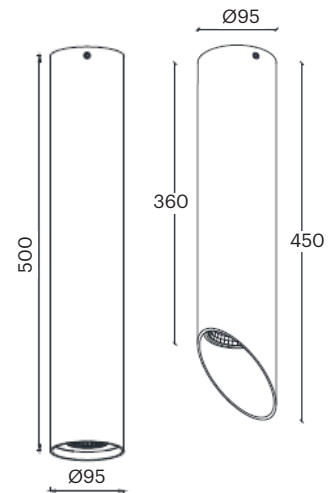

LKT205.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT205	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● B0 Copper
				RA RAL Chart




TRUNCUS 750 – GU10


LKT2 06

GOOD NIGHT

Surface



Installation	Indoor	CRI	GU10
Mounting Position	Surface	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø95 h750mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKT206.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT206	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




TRUNCUS 750

LKT2 06

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø95 h750mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		



LKT206.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT206	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




BIG TRUNCUS 300 – GU10


LKT2 07

GOOD NIGHT

Surface



Installation	Indoor	CRI	Gu10
Mounting Position	Surface	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø120 h300mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKT207.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT207	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




BIG TRUNCUS 300


LKT2 07

GOOD NIGHT

Surface

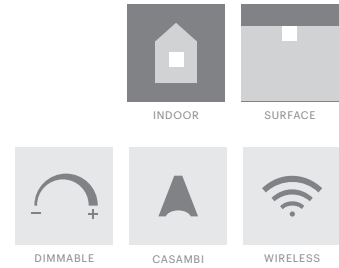

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120 h300mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		



LKT207.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT207	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




BIG TRUNCUS 500 – GU10

LKT2 08


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø120 h500mm
Adjustable	No

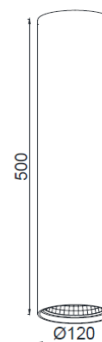

LKT208.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT208	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




BIG TRUNCUS 500


LKT2 08

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120 h500mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

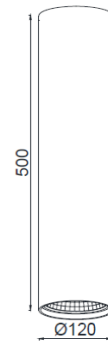

LKT208.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT208	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




BIG TRUNCUS 750 – GU10

LKT2 09


GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø120 h750mm
Adjustable	No

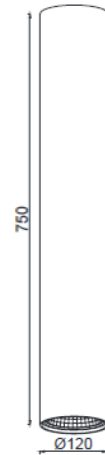

LKT209.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT209	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart




BIG TRUNCUS 750


LKT2 09

GOOD NIGHT

Surface



Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø120 h750mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

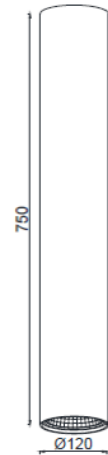

LKT209.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT209	12	27 2700	1 Narrow 12°	○ 10 White
	17	30 3000	2 Medium 24°	● 20 Black
	24	40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart




TRIGINTA 600

LKT3 19 586mm


GOOD NIGHT

Surface




Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	8W 12W 18W
Lumen output	1400 2000 2700
Connection	350mA 500mA 700mA
Driver	Remote
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	586x35 h35mm
Adjustable	No

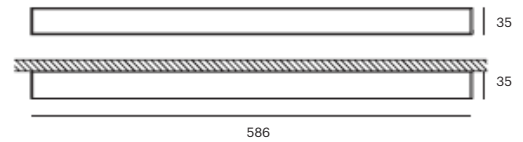

LKT319.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT319	8	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	18	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				B0 Copper	

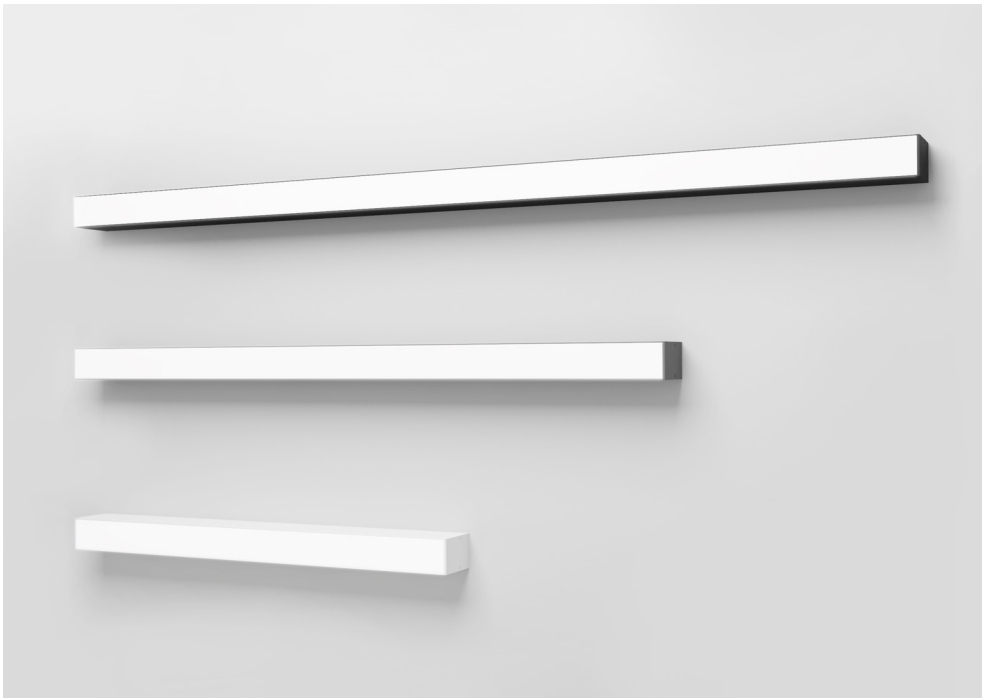


TRIGINTA 900

LKT3 20 866mm

GOOD NIGHT

Surface

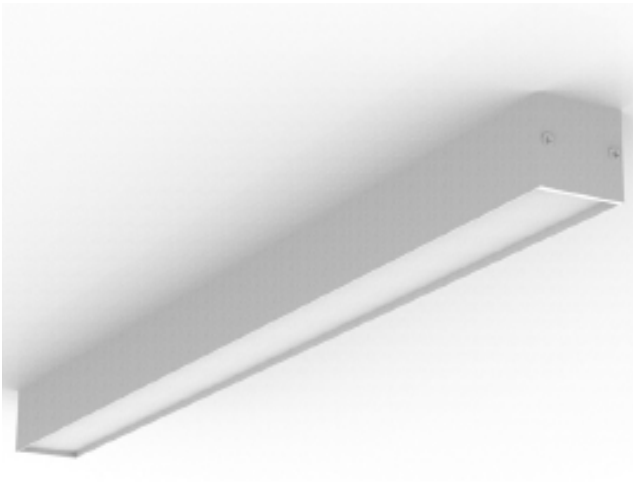

INDOOR

SURFACE



DIMMABLE




CASAMBI



WIRELESS


Installation	Indoor		
Mounting Position	Surface		
IP	20		
Wattage	12W	18W	26W
Lumen output	2100	3000	4100
Connection	350mA	500mA	700mA
Driver	Remote		
Dimmable	DALI, Push / Driver on request		

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x35 h35mm
Adjustable	No

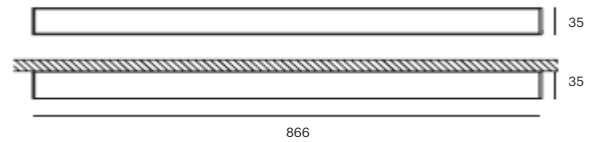

LKT320.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT320	12	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	18	30 3000		20 Black	NO Metallic Gold
	26	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				B0 Copper	

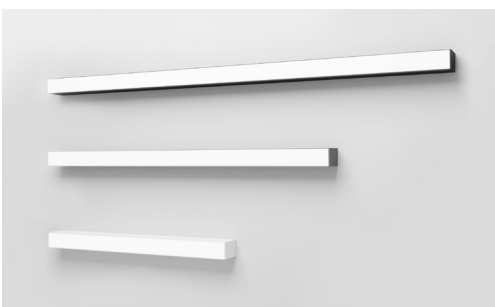




TRIGINTA 1200

LKT3 21 1146mm


GOOD NIGHT

Surface




Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	16W 24W 34W
Lumen output	2800 4000 5400
Connection	350mA 500mA 700mA
Driver	Remote
Dimmable	DALI, Push / Driver on request

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1146x35 h35mm
Adjustable	No

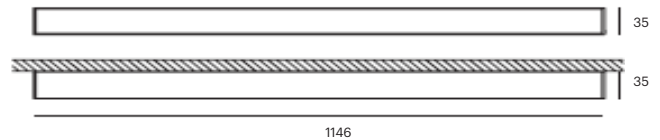

LKT321.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT321	16	27 2700		<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper
	24	30 3000		<ul style="list-style-type: none"> ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome
	34	40 4000		<p>RA RAL Chart</p>

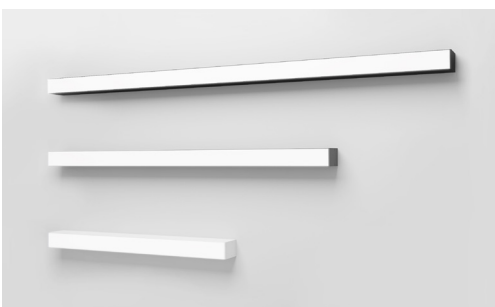





VETUS 600


LKT4 10 586mm

GOOD NIGHT

Surface

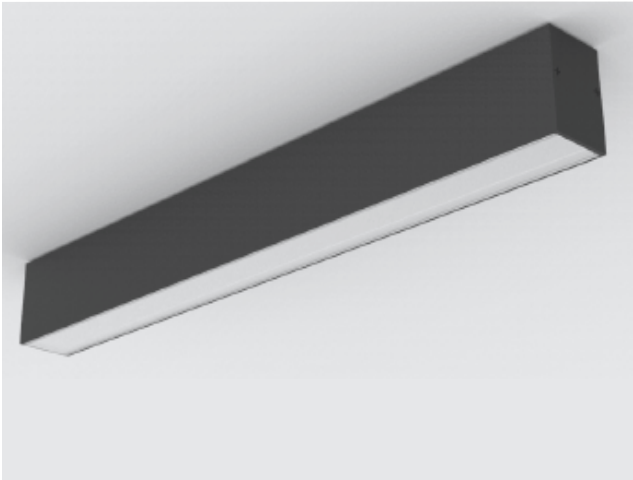

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	8W 12W 18W	Dimensions	586x43,5 h65,5mm
Lumen output	1400 2000 2700	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

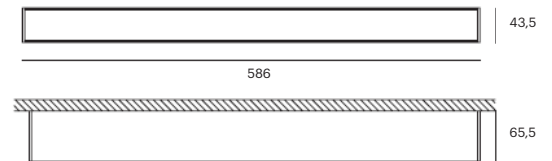

LKT410.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT410	8	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	18	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				B0 Copper	





VETUS 900


LKT4 11 866mm

GOOD NIGHT

Surface

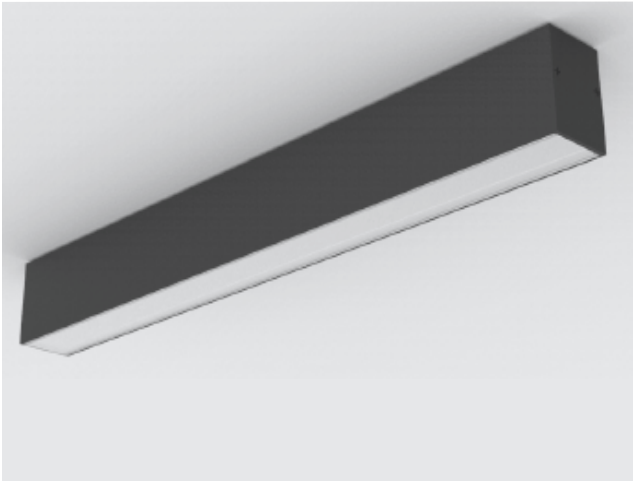

Installation	Indoor	CRI	> 90
Mounting Position	Surface	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	12W 18W 26W	Dimensions	866x43,5 h65,5mm
Lumen output	2100 3000 4000	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	DALI, Push / Driver on request		

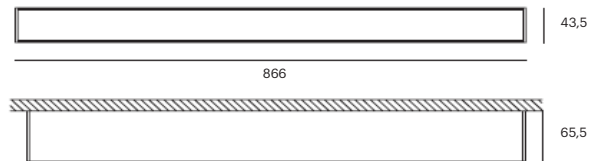

LKT411.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT411	12	27 2700		10 White MO Metallic Copper
	18	30 3000		20 Black NO Metallic Gold
	26	40 4000		40 Gold PO Metallic Chrome CO Silver RA RAL Chart BO Copper







VETUS 1200


LKT4 12 1146mm

GOOD NIGHT

Surface

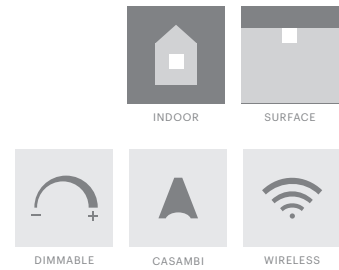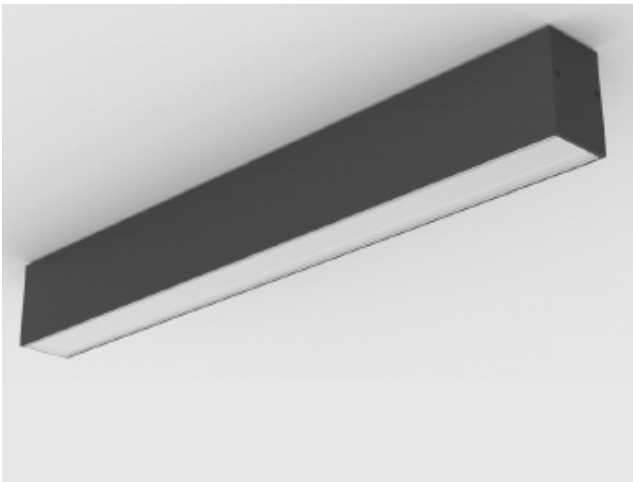

Installation	Indoor			CRI	> 90
Mounting Position	Surface			Life Time	L80 / B10 72.000 h
IP	20			Cut-out Size	-
Wattage	16W	24W	35W	Dimensions	1146x43,5 h65,5mm
Lumen output	2800	4000	5400	Adjustable	No
Connection	230V				
Driver	Included				
Dimmable	DALI, Push / Driver on request				

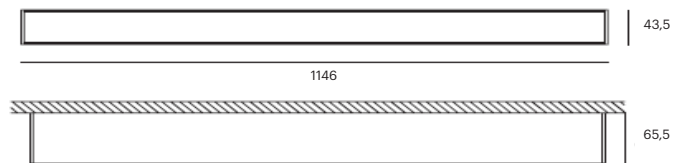

LKT412.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKT412	16	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	24	30 3000		20 Black	NO Metallic Gold
	35	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				B0 Copper	




GUTTA TECTUM

LKT5 01



GOOD NIGHT

Surface



Installation	Indoor
Mounting Position	Surface
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø120x100h h156mm
Adjustable	Yes

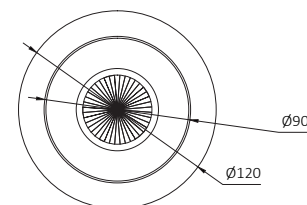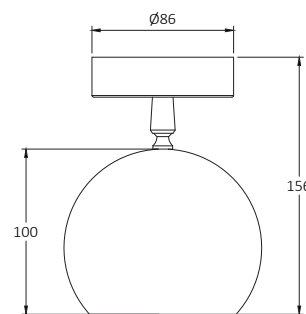

LKT501.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKT501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart



LUMIK Recessed


- 101 CUBIC QT1 5454
- 103 CUBIC QT2 5496
- 105 CUBIC Q1 – GU10 7676
- 106 CUBIC Q2 – 2GU10 76141
- 107 CUBIC QT1 7676
- 108 CUBIC QT2 76141
- 109 CUBIC Q1 – GU10 Trimless 7589
- 110 CUBIC Q2 – 2GU10 Trimless 75165
- 111 CUBIC Q3 – 3GU10 Trimless 75246
- 113 CUBIC Q1 – GU10 97102
- 115 CUBIC Q2 – 2GU10 97186
- 116 CUBIC Q3 – 3GU10 97270
- 117 CUBIC QT1 97102
- 118 CUBIC Q1 – QR111 177177
- 119 CUBIC Q2 – 2QR111 177323
- 120 CUBIC Q3 – 3QR111 177468
- 121 CUBIC QT1 177177
- 123 CUBIC QT2 177323
- 124 CUBIC QT3 177468
- 125 INTUS – GU10
- 127 INTUS QT1
- 128 INTRA – GU10
- 129 INTRA QT1
- 130 ALIPES – GU10
- 131 VIAE QV 1
- 132 ARTUS QV 1
- 133 PAULLULUM QV 1
- 134 TECTUM QV 1
- 135 BIG TECTUM QV 1
- 136 VULTUS QV 1
- 137 BIG VULTUS QV 1
- 139 TIBI QV 1
- 141 DEXTER QV 1

CUBIC QT1 5454


LKE3 01

GOOD NIGHT

Recessed



Installation	Indoor	CRI	> 90
Mounting Position	Ceiling recessed	Life Time	L90 / B20 50.000 h
IP	20	Cut-out Size	45x45 h70mm
Wattage	6W	Dimensions	54x54 h70mm
Lumen output	635	Adjustable	No
Connection	250mA / 350mA		
Driver	Included (remote)		
Dimmable	on/off (dimnable on request)		

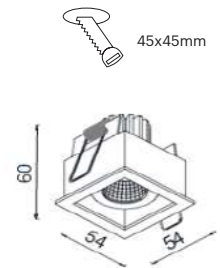

LKE301.*.*.*.*

Number	W	Colour Temperature	Light Distribution	Finish	
LKE301	6	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
		30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	




CUBIC QT2 5496


LKE3 02

GOOD NIGHT

Recessed



Installation	Indoor	CRI	> 90
Mounting Position	Ceiling recessed	Life Time	L90 / B20 50.000 h
IP	20	Cut-out Size	94,4x45 h78mm
Wattage	2 x 6W	Dimensions	96x54 h78mm
Lumen output	2 x 635	Adjustable	No
Connection	250mA / 350mA		
Driver	Included (remote)		
Dimmable	on/off (dimmmable on request)		

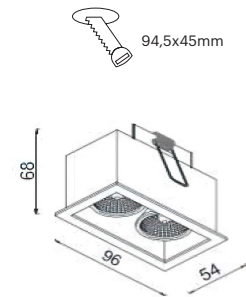

LKE302.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE302	12	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
		30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	




CUBIC Q1 – GU10 7676

LKE2 01

GOOD NIGHT

Recessed

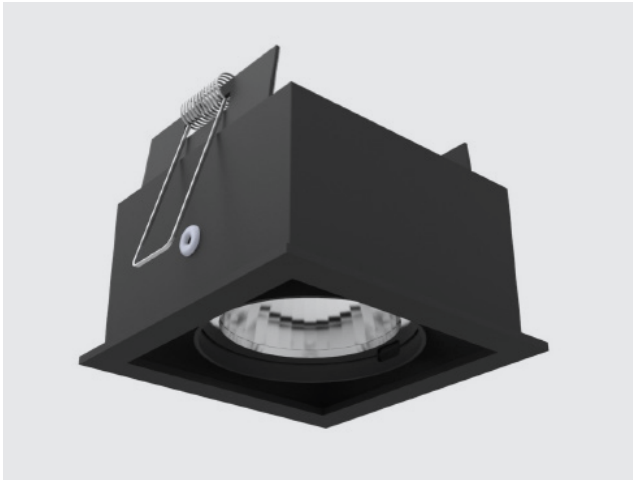

INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	70x70mm h85mm
Dimensions	76x76 h75mm
Adjustable	No



LKE201.GU10.XX.X.**



Number	W	Colour Temperature	Light Distribution	Finish
LKE201	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC Q2 – 2GU10 76141

LKE2 02


GOOD NIGHT

Recessed

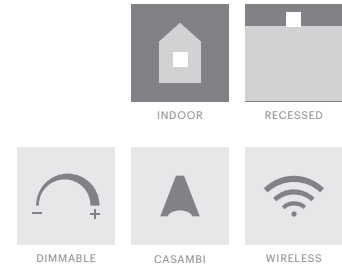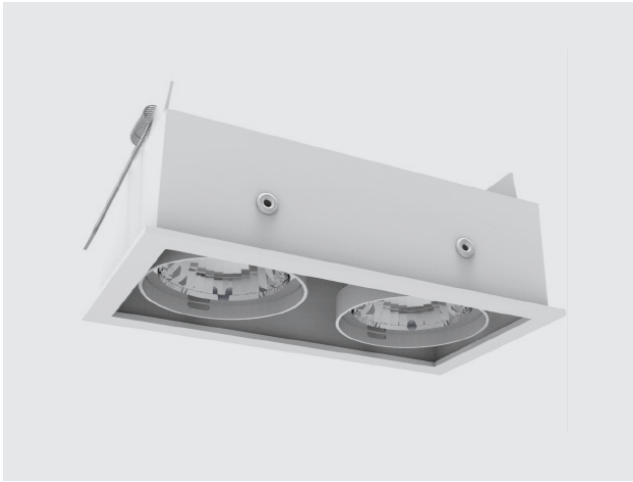

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x GU10
Lumen output	2 x GU10
Connection	239V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	133x70 h85mm
Dimensions	76x 41 h75mm
Adjustable	No

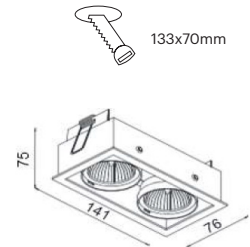

LKE202.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish										
LKE202	2 x GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														

CUBIC QT1 7676

LKE2 01

GOOD NIGHT

Recessed

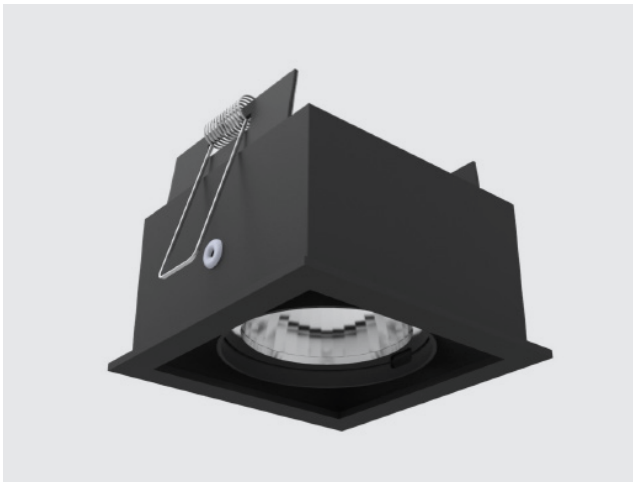

INDOOR

RECESSED



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L90 / B20 50.000 h
Cut-out Size	70x70 h90mm 70x70 h110mm
Dimensions	76x76 h80mm 76x76 h115mm
Adjustable	No



LKE201.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKE201	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	9	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	

CUBIC QT2 76141

LKE2 02


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x 5W 2 x 9W
Lumen output	2 x 700 2 x 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L90 / B20 50.000 h
Cut-out Size	133x70 h110mm
Dimensions	76x141 h75mm
Adjustable	No

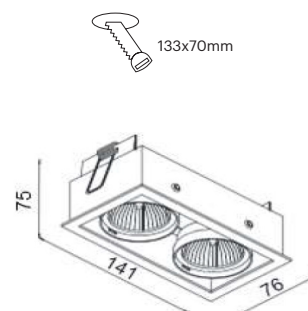

LKE202.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE202	10	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	18	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	




CUBIC Q1 – GU10 Trimless 7589

LKE1 05

GOOD NIGHT

Recessed

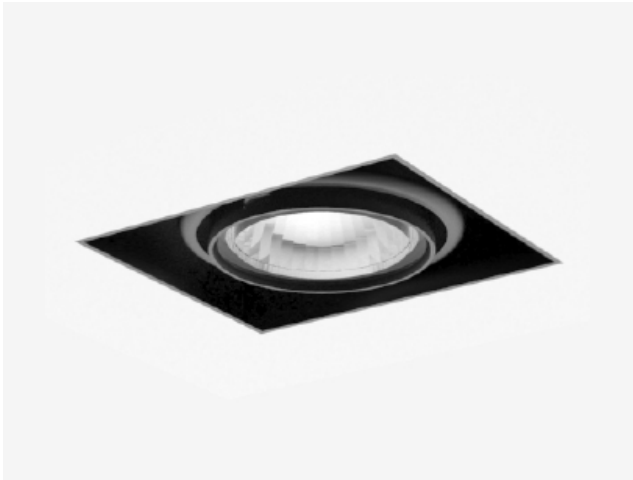

INDOOR

RECESSED



DIMMABLE



CASAMBI





WIRELESS

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	89x76 h105mm
Wattage	GU10	Dimensions	89x76 h97mm
Lumen output	GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



89x76mm



LKE105.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE105	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart



CUBIC Q2 – 2GU10 Trimless 75165

LKE1 06

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	166x76 h84mm
Wattage	2 x GU10	Dimensions	166x75 h74mm
Lumen output	2 x GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

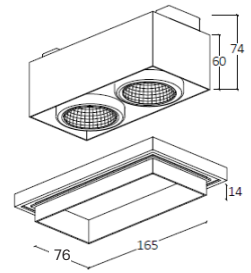

LKE106.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE106	2 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart



CUBIC Q3 – 3GU10 Trimless 75246

LKE1 07

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	3 x GU10
Lumen output	3 x GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp


CRI	GU10
Life Time	GU10
Cut-out Size	246x76 h107mm
Dimensions	246x76 h97mm
Adjustable	Yes

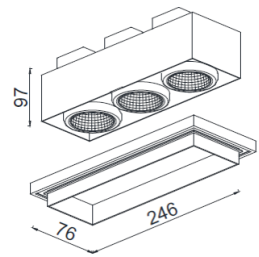

LKE107.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKE107	3 x GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														



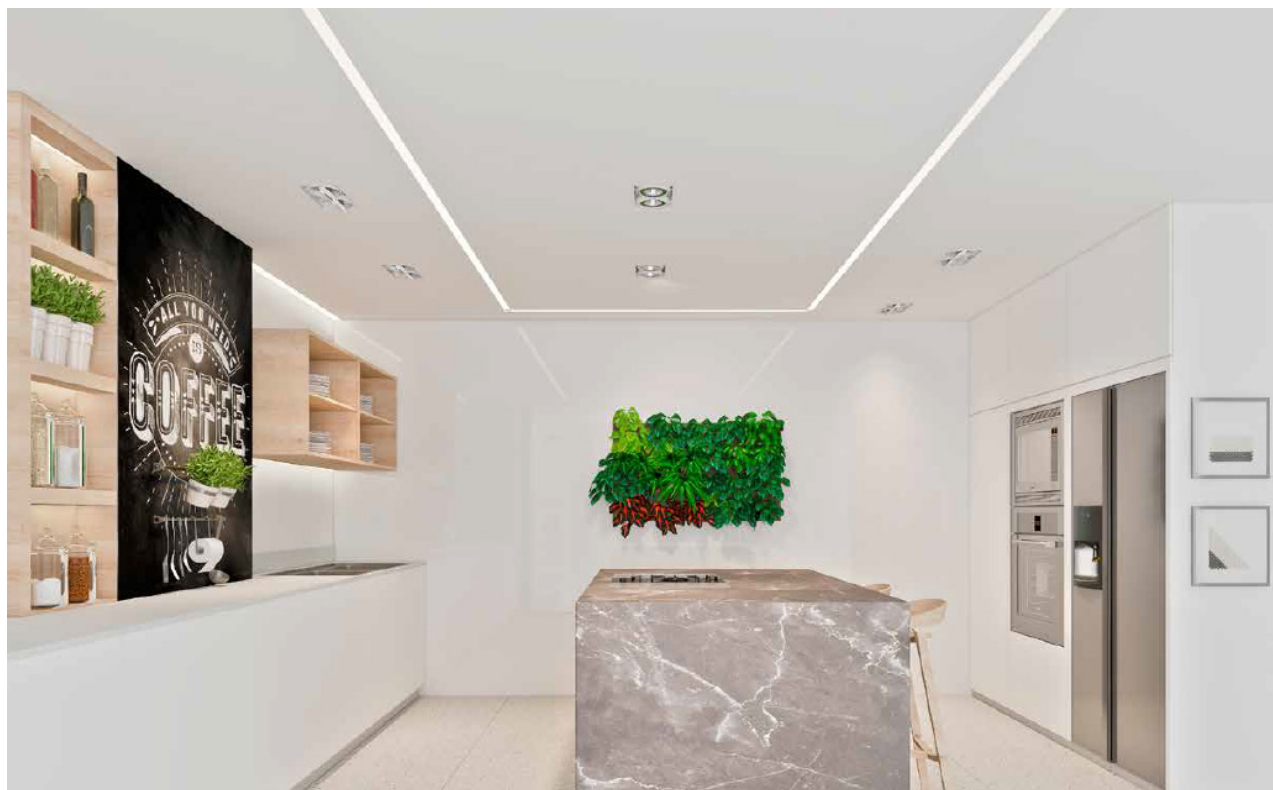

CUBIC Q1 – GU10 97102

LKE1 01


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	96x84 h87,5mm
Dimensions	106x101 h77,5mm
Adjustable	Yes



LKE101.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKE101	GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														



CUBIC Q2 – 2GU10 97186

LKE1 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x GU10
Lumen output	2 x GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	174x84 h87,5mm
Dimensions	101x190 h77,5mm
Adjustable	Yes



174x84mm

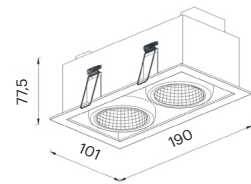

LKE102.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish
LKE102	2 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC Q3 – 3GU10 97270

LKE1 03


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	3 x GU10
Lumen output	3 x GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	260x84 h87,5mm
Dimensions	270x101 h77,5mm
Adjustable	Yes

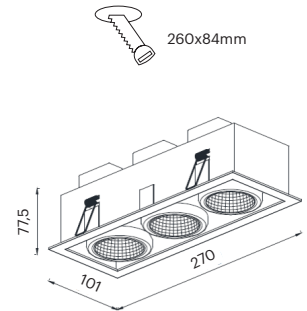

LKE103.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE103	3 x GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC QT1 97102

LKE1 04

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimmmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	96x84 h90mm 96x84 h110mm
Dimensions	106x101 h89mm 106x101 h100mm
Adjustable	Yes

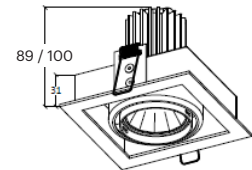

LKE104.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE104	9	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	12	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	

CUBIC Q1 – QR111 177177

LKE4 01

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	QR111 - GU10
Mounting Position	Ceiling recessed	Life Time	QR111 - GU10
IP	20	Cut-out Size	173x162 h125mm
Wattage	QR111 - GU10	Dimensions	177x177 h113mm
Lumen output	QR111 - GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKE401.QR111.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE401	QR111	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC Q2 – 2QR111 177323

LKE4 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x QR111 - GU10
Lumen output	2 x QR111 - GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 - GU10
Life Time	QR111 - GU10
Cut-out Size	315x162 h125mm
Dimensions	323x177 h113mm
Adjustable	Yes



315x162mm

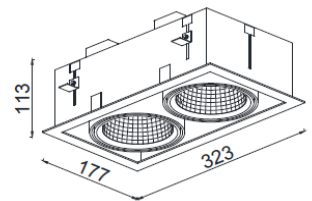

LKE402.QR111.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish
LKE402	2 x QR111	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● B0 Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC Q3 – 3QR111 177468

LKE4 03


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	3 x QR111 - GU10
Lumen output	3 x QR111 -GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	QR111 - GU10
Life Time	QR111 - GU10
Cut-out Size	450x162 h125mm
Dimensions	468x177 h113mm
Adjustable	Yes

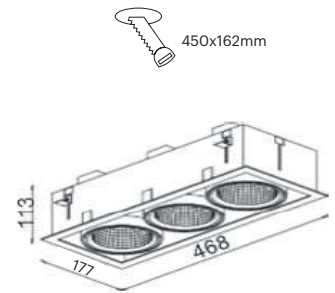

LKE403.QR111.XX.X.**



Number	W	Colour Temperature	Light Distribution	Finish
LKE403	3 x QR111	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

CUBIC QT1 177177

LKE4 04


GOOD NIGHT

Recessed

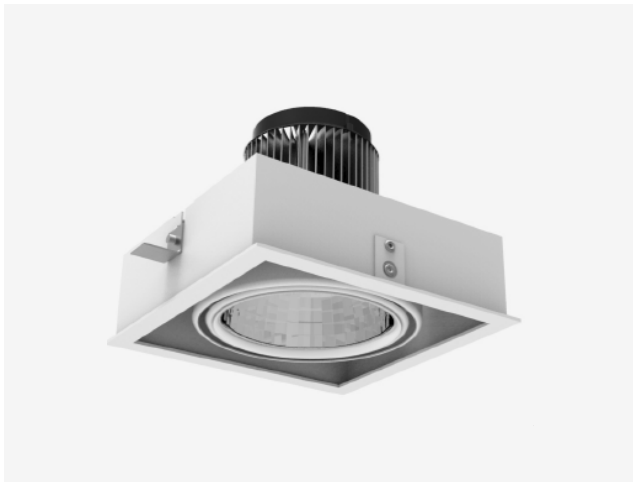

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	11,3W 16,5W 23,6W
Lumen output	2100 2900 3900
Connection	350mA / 500mA / 700mA
Driver	Included (remote)
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	173x162 h170mm 173x162 h170mm 173x162 h210mm
Dimensions	177x177 h160mm 177x177 h160mm 177x177 h200mm
Adjustable	Yes

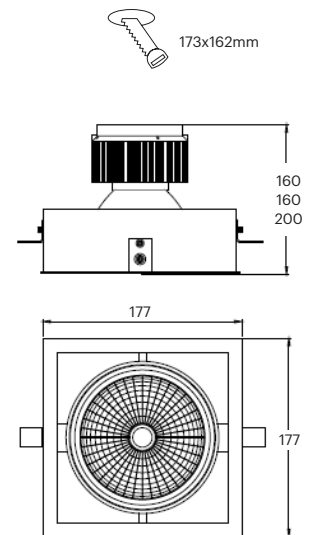

LKE404.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE404	11	27 2700	1 Narrow 14°	○ 10 White	● MO Metallic Copper
	16	30 3000	2 Medium 22°	● 20 Black	● NO Metallic Gold
	23	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	



CUBIC QT2 177323

LKE4 05

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2x11,3W 2x16,5W 2x23,6W
Lumen output	2x2100 2x2900 2x3900
Connection	350mA / 500mA / 700mA
Driver	Included (remote)
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	315x162 h170mm 315x162 h170mm 315x162 h210mm
Dimensions	177x323 h160mm 177x323 h160mm 177x323 h200mm
Adjustable	Yes

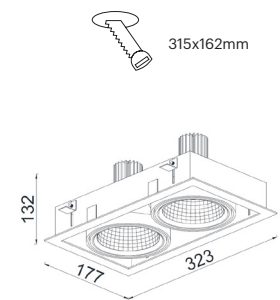

LKE405.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE405	11	27 2700	1 Narrow 14°	○ 10 White	● MO Metallic Copper
	16	30 3000	2 Medium 22°	● 20 Black	● NO Metallic Gold
	23	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● B0 Copper	

CUBIC QT3 177468

LKE4 06

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	3x11,3W 3x16,5W 3x23,6W
Lumen output	3x2100 3x2900 3x3900
Connection	350mA / 500mA / 700mA
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	462x162 h170mm 462x162 h170mm 462x162 h210mm
Dimensions	177x468 h160mm 177x468 h160mm 177x468 h200mm
Adjustable	Yes

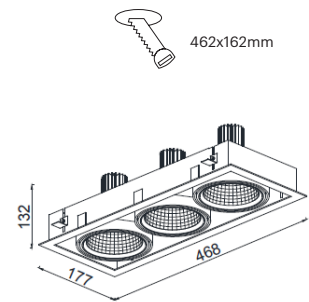

LKE406.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKE406	11	27 2700	1 Narrow 14°	○ 10 White	● MO Metallic Copper
	16	30 3000	2 Medium 22°	● 20 Black	● NO Metallic Gold
	23	40 4000	3 Wide 37°	● 40 Gold	● PO Metallic Chrome
			4 Superwide 58°	● CO Silver	RA RAL Chart
				● BO Copper	

INTUS – GU10

LKE5 01


GOOD NIGHT

Recessed



Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø90 h116mm
Dimensions	Ø96 h116mm
Adjustable	No

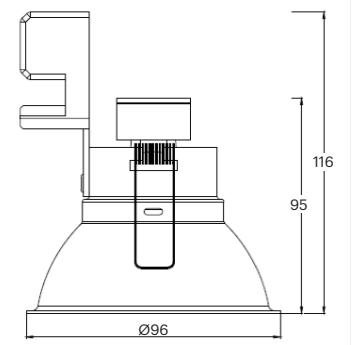

LKE501.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE501	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> <li style="width: 50%;">○ 10 White <li style="width: 50%;">● MO Metallic Copper <li style="width: 50%;">● 20 Black <li style="width: 50%;">● NO Metallic Gold <li style="width: 50%;">● 40 Gold <li style="width: 50%;">● PO Metallic Chrome <li style="width: 50%;">● CO Silver <li style="width: 50%;">RA RAL Chart <li style="width: 50%;">● BO Copper



INTUS QT1

LKE5 01

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Ø90 h120mm Ø90 h140mm
Dimensions	Ø96 h110mm Ø96 h130mm
Adjustable	No



Ø90mm



LKE501.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKE501	5	27 2700	1 Narrow 12°	○ 10 White
	9	30 3000	2 Medium 24°	● 20 Black
		40 4000	3 Wide 36°	● 40 Gold
				● MO Metallic Copper
				● NO Metallic Gold
				● PO Metallic Chrome
				● CO Silver
				● BO Copper
				RA RAL Chart

INTRA – GU10

LKE5 02


GOOD NIGHT

Recessed




Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	Ø90 h115mm
Dimensions	Ø96 h105mm
Adjustable	Yes

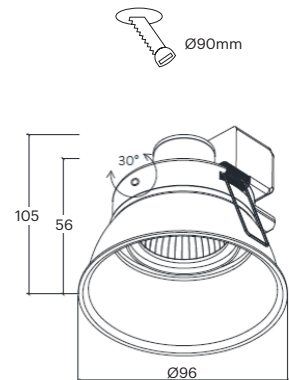

LKE502.GU10.XX.X.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE502	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

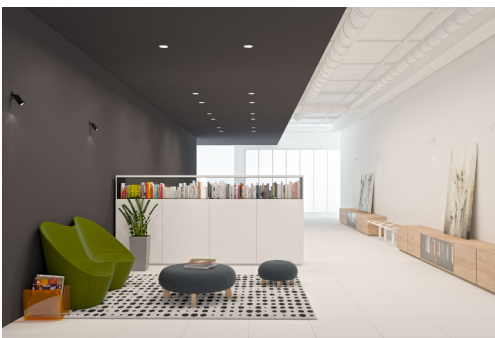

INTRA QT1

LKE5 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI



WIRELESS


Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	5W 9W
Lumen output	700 1200
Connection	150mA / 250mA
Driver	Included (remote)
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Ø90 h115mm Ø90 h135mm
Dimensions	Ø96 h105mm Ø96 h125mm
Adjustable	Yes



Ø96 x h110mm

125mm (1200lm)
125mm (700lm)

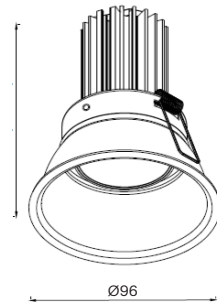

LKE502.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE502	5	27 2700	1 Narrow 12°	10 White	MO Metallic Copper
	9	30 3000	2 Medium 24°	20 Black	NO Metallic Gold
		40 4000	3 Wide 36°	40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	



ALIPES – GU10

LKE7 02

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	GU10
Mounting Position	Ceiling recessed	Life Time	GU10
IP	20	Cut-out Size	Ø135 h74mm
Wattage	GU10	Dimensions	Ø146 h57mm
Lumen output	GU10	Adjustable	Yes
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

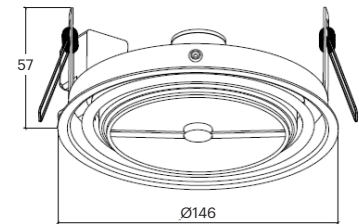

LKE702.GU10.XX.X.**


Number	W	Colour Temperature	Light Distribution	Finish										
LKE702	GU10	XX Depending on lamp	XX Depending on lamp	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														

VIAE QV 1


LKE8 01

GOOD NIGHT

Recessed




Installation	Indoor	CRI	> 80
Mounting Position	Wall recessed	Life Time	25.000 h
IP	20	Cut-out Size	175x40 h50mm
Wattage	1W	Dimensions	188x55 h40mm
Lumen output	130	Adjustable	No
Connection	350mA		
Driver	Included (remote)		
Dimmable	Non-dimmable		

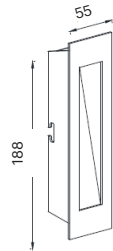

LKE801.1.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE801	1	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
		RE Red		CO Silver	RA RAL Chart
		BL Blue		BO Copper	

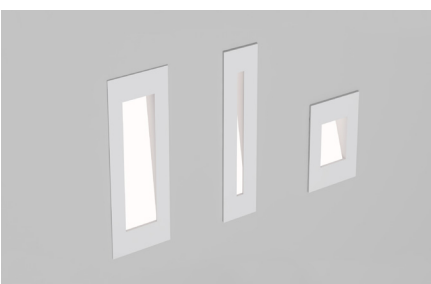


ARTUS QV 1


LKE8 02

GOOD NIGHT

Recessed




Installation	Indoor	CRI	> 80
Mounting Position	Wall recessed	Life Time	25.000 h
IP	20	Cut-out Size	155x22 h50mm
Wattage	1W	Dimensions	185x33 h40mm
Lumen output	130	Adjustable	No
Connection	350mA		
Driver	Included (remote)		
Dimmable	Non-dimmable		

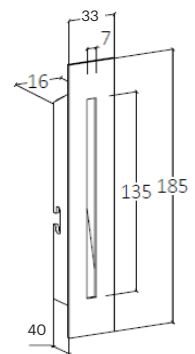

LKE802.1.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE802	1	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
		RE Red		CO Silver	RA RAL Chart
		BL Blue		BO Copper	

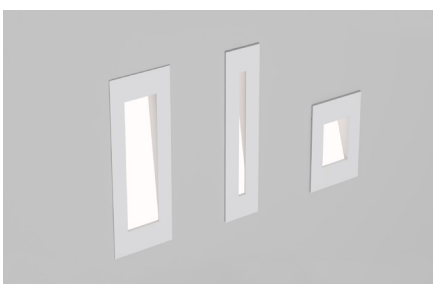


PAULLULUM QV 1


LKE8 03

GOOD NIGHT










Recessed




Installation	Indoor	CRI	> 80
Mounting Position	Wall recessed	Life Time	25.000 h
IP	20	Cut-out Size	85x40 h50mm
Wattage	1W	Dimensions	100x55 h40mm
Lumen output	130	Adjustable	No
Connection	350mA		
Driver	Included (remote)		
Dimmable	Non-dimmable		



LKE803.1.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE803	1	27 2700	 5 Asymmetric	 10 White	 MO Metallic Copper
		30 3000		 20 Black	 NO Metallic Gold
		40 4000		 40 Gold	 PO Metallic Chrome
		27 Red		 CO Silver	RA RAL Chart
		27 Blue		 BO Copper	

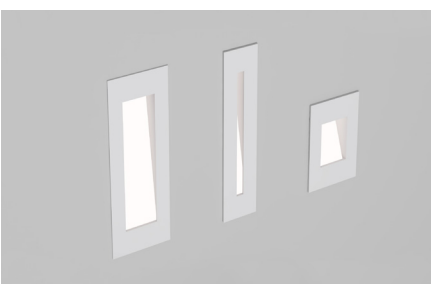

TECTUM QV 1

LKE9 03

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE



CASAMBI




WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x 5W
Lumen output	2 x 700
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Upon request
Dimensions	1000x80 h70mm
Adjustable	No



Upon request

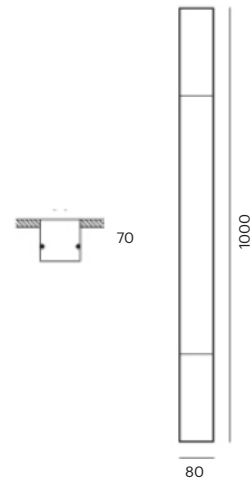

LKE903.8.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE903	10	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

BIG TECTUM QV 1

LKE9 04

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	2 x 5W
Lumen output	2 x 700
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	Upon request
Dimensions	2000x80 h70mm
Adjustable	No

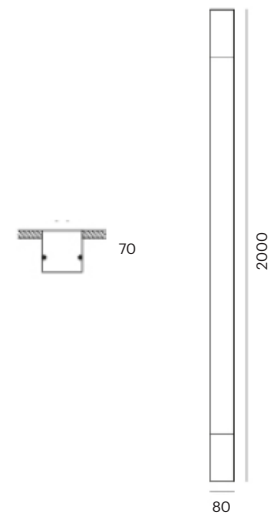

LKE904.8.**.5.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKE904	10	27 2700	5 Asymmetric	○ 10 White	● MO Metallic Copper
		30 3000		● 20 Black	● NO Metallic Gold
		40 4000		● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● B0 Copper	

VULTUS QV 1

LKE10 01

GOOD NIGHT

Recessed

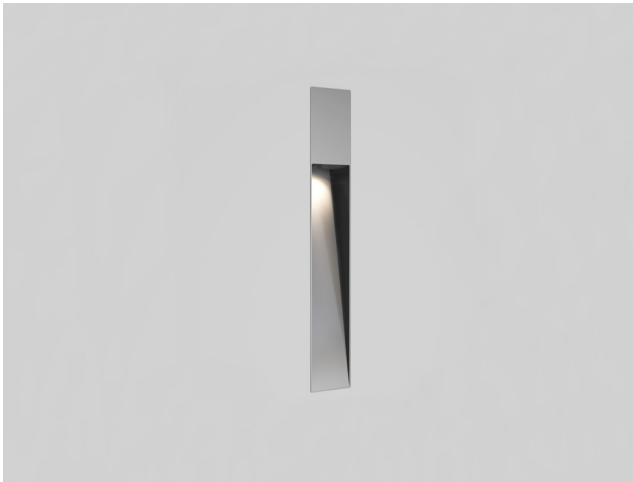

INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	> 90
Mounting Position	Wall recessed	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	400x80 h80mm
Wattage	5W	Dimensions	400x80 h70mm
Lumen output	700	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimmable on request)		

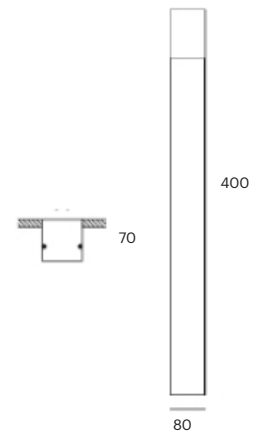

LKE1001.8.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE1001	5	27 2700	5 Asymmetric	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	





BIG VULTUS QV 1

LKE10 02


GOOD NIGHT

Recessed

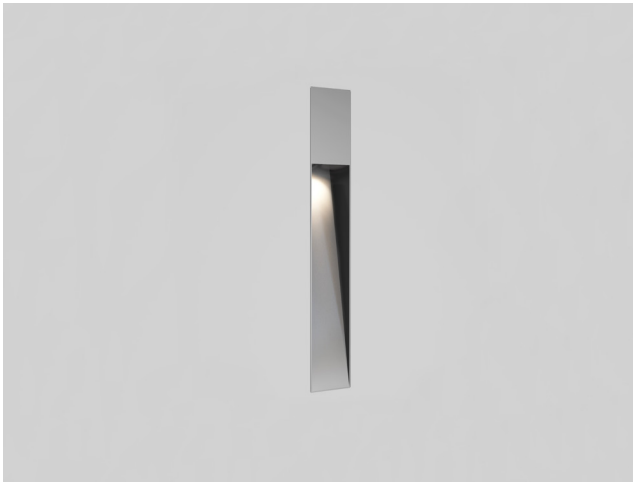





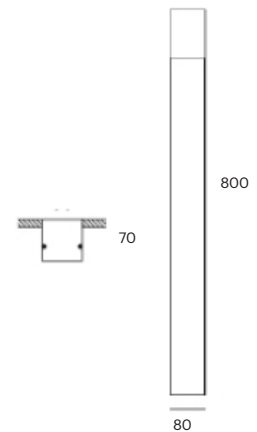




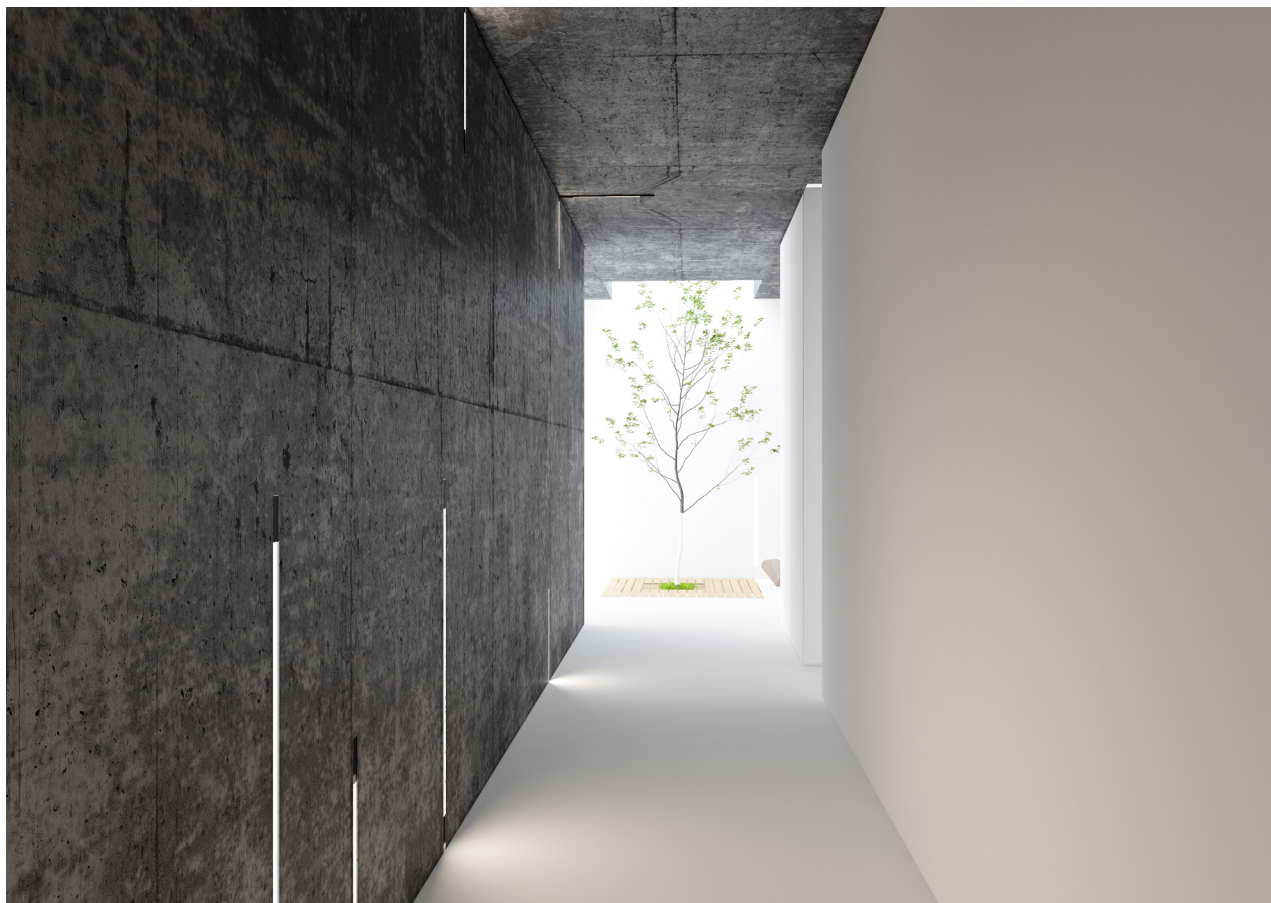
Installation	Indoor
Mounting Position	Wall recessed
IP	20
Wattage	8W
Lumen output	700
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	800x80 h80mm
Dimensions	800x80 h70mm
Adjustable	No



LKE1002.8.**.5.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE1002	8	27 2700	 5 Asymmetric	 10 White	 MO Metallic Copper
		30 3000		 20 Black	 NO Metallic Gold
		40 4000		 40 Gold	 PO Metallic Chrome
				 CO Silver	RA RAL Chart
				 BO Copper	




TIBI QV 1

LKE13 10

GOOD NIGHT

Recessed

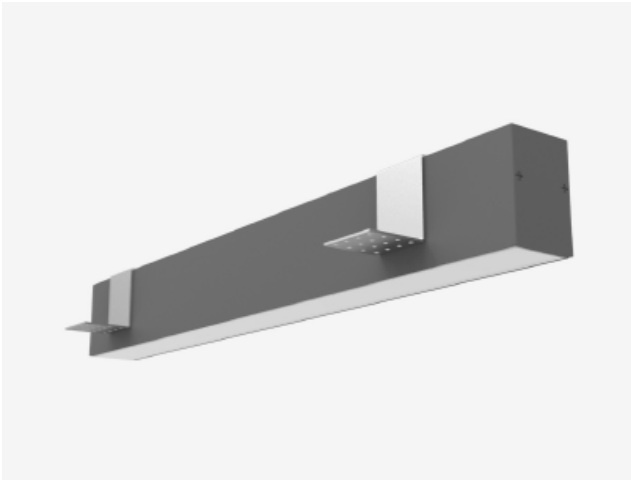

INDOOR

RECESSED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	12,3W 15,2W 24,1W
Lumen output	2000 3000 4000
Connection	230V
Driver	Included
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	Upon request
Dimensions	586 / 866 / 1146x44 h65mm
Adjustable	No

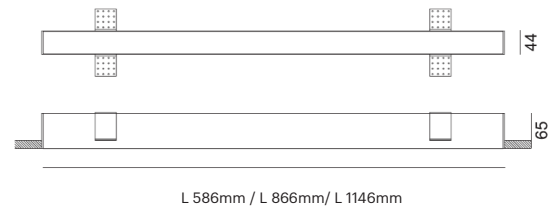

LKE1310.**.**.6.**

Number	W	Colour Temperature	Light Distribution	Finish
LKE1310	12	27 2700	6 Opal	○ 10 White ● MO Metallic Copper
	15	30 3000		● 20 Black ● NO Metallic Gold
	24	40 4000		● 40 Gold ● PO Metallic Chrome
				● CO Silver RA RAL Chart
				● BO Copper



DEXTER QV 1

LKE14 01

GOOD NIGHT

Recessed



INDOOR

RECESSED



DIMMABLE





CASAMBI



WIRELESS

Installation	Indoor
Mounting Position	Ceiling recessed
IP	20
Wattage	21W
Lumen output	2900
Connection	230V
Driver	Included (remote)
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	Upon request
Dimensions	309x44 h75mm
Adjustable	No

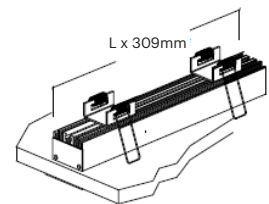

LKE1401.21.**.6.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKE1401	21	27 2700	6 Opal	10 White	MO Metallic Copper
		30 3000		20 Black	NO Metallic Gold
		40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				B0 Copper	



LUMIK Suspended


145	FILUM 55
147	FILUM 55 GU10
148	FILUM 90
149	FILUM 90 GU10
151	FILUM 120 GU10
153	FILUM 120
154	FILUM 2550
155	FILUM 2525
157	FILUM 2575
159	QUATTUOR 600
161	QUATTUOR 900
162	QUATTUOR 1200
163	PASTILLUM FARTUM 600
165	PASTILLUM FARTUM 900
167	PASTILLUM FARTUM 1200
169	QUINQUE 600
171	QUINQUE 900
172	QUINQUE 1200
173	GUTTA PENDULUS GU10
175	NOLA GUTTA 370
177	NOLA GUTTA 300
179	NOLA SICCO 3927
180	NOLA BASIC 3716
181	NOLA BASIC 1608
182	NOLA CONUS 1517
183	NOLA CONUS 2527
184	NOLA CLASSIC 3517
185	NOLA CLASSIC 2813
187	NOLA INDUSTRIAE 4726
189	NOLA NORDIC 4619
191	NOLA BONN 2322
193	NOLA CAUPONA 1616
194	NOLA CAUPONA 2722
195	NOLA CAUPONA 3127
197	NOLA SINA 5217
199	NOLA VOLANS 3216

FILUM 55


LKS1 01

GOOD NIGHT

Suspended



Installation	Indoor	CRI	> 90
Mounting Position	Suspended	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	5W 9W	Dimensions	Ø55 2h50mm
Lumen output	700 1200	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimmable on request)		



LKS101.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKS101	5	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	9	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
		40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	

Suspended




FILUM 55 GU10


LKS1 01

GOOD NIGHT

Suspended

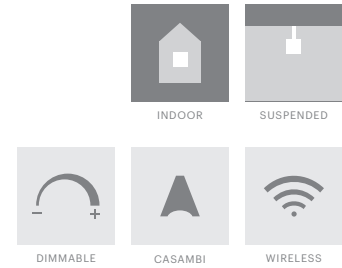

Installation	Indoor	CRI	GU10
Mounting Position	Suspended	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø55 h250mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKS101.**.**.*

Number	W	Colour Temperature	Light Distribution	Finish
LKS101	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

FILUM 90


LKS1 02

GOOD NIGHT

Suspended



Installation	Indoor	CRI	> 90
Mounting Position	Suspended	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	12W 17W 24W	Dimensions	Ø90 h250mm
Lumen output	2100 2900 3900	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimnable on request)		



LKS102.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKS102	12	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	



FILUM 90 GU10

LKS1 02


GOOD NIGHT

Suspended



Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp


CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø90 h250mm
Adjustable	No



LKS102.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS102	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart

Suspended

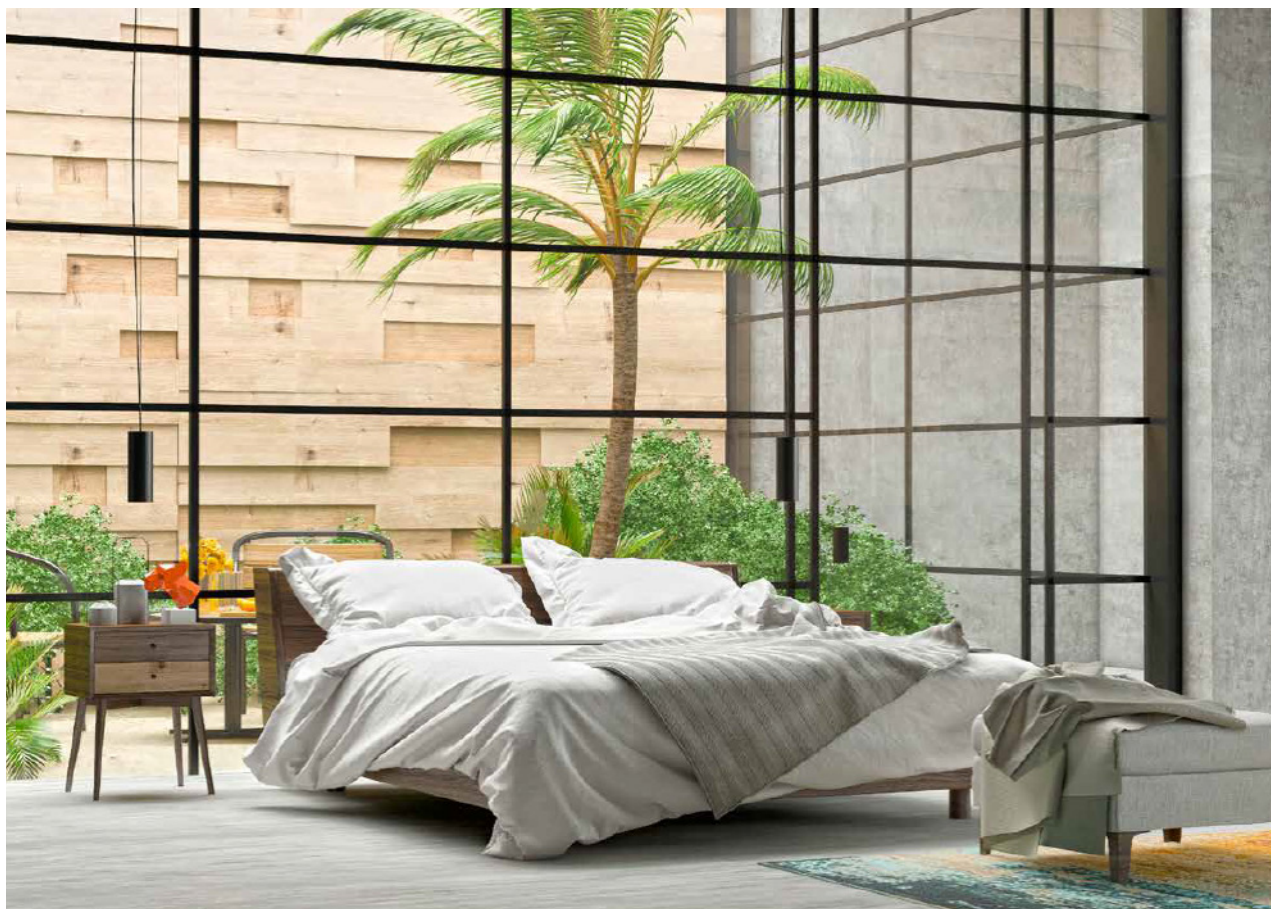


FILUM 120 GU10

LKS1 03

GOOD NIGHT

Suspended



Installation	Indoor	CRI	GU10
Mounting Position	Suspended	Life Time	GU10
IP	20	Cut-out Size	-
Wattage	GU10	Dimensions	Ø120 h280mm
Lumen output	GU10	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		



LKS103.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS103	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> ○ 10 White ● 20 Black ● 40 Gold ● CO Silver ● BO Copper ● MO Metallic Copper ● NO Metallic Gold ● PO Metallic Chrome RA RAL Chart



FILUM 120

LKS1 03

GOOD NIGHT

Suspended



Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	12W 17W 24W
Lumen output	2100 2900 3900
Connection	230V
Driver	Included
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 50.000 h
Cut-out Size	-
Dimensions	Ø120 h280mm
Adjustable	No



LKS103.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKS103	12	27 2700	1 Narrow 12°	○ 10 White	● MO Metallic Copper
	17	30 3000	2 Medium 24°	● 20 Black	● NO Metallic Gold
	24	40 4000	3 Wide 36°	● 40 Gold	● PO Metallic Chrome
				● CO Silver	RA RAL Chart
				● BO Copper	

FILUM 2550


LKS2 02500mm

GOOD NIGHT

Suspended

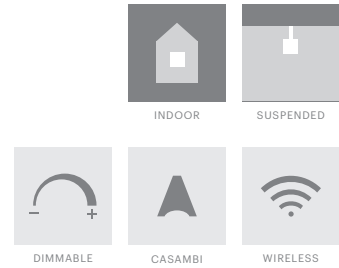

Installation	Indoor	CRI	> 90
Mounting Position	Suspended	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	5W	Dimensions	Ø25 h250mm
Lumen output	600	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimmable on request)		



LKS202.**.**.**



Number	W	Colour Temperature	Light Distribution	Finish
LKS202	5	27 2700	2 Medium 24°	10 White MO Metallic Copper
		30 3000		20 Black NO Metallic Gold
				40 Gold PO Metallic Chrome
				CO Silver RA RAL Chart
				BO Copper

FILUM 2525


LKS2 01 250mm

GOOD NIGHT

Suspended

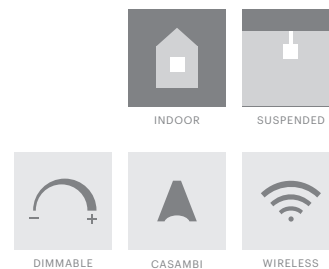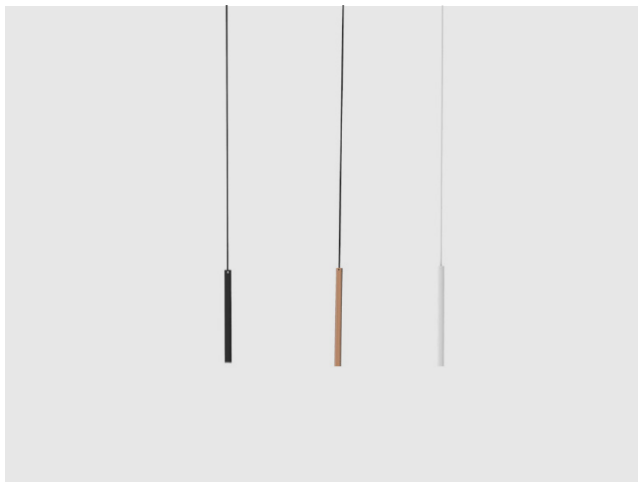

Installation	Indoor	CRI	> 90
Mounting Position	Suspended	Life Time	L80 / B10 50.000 h
IP	20	Cut-out Size	-
Wattage	5W	Dimensions	Ø25 h500mm
Lumen output	600	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimmable on request)		



LKS201.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS201	5	27 2700	2 Medium 24°	10 White MO Metallic Copper
		30 3000		20 Black NO Metallic Gold
				40 Gold PO Metallic Chrome
				CO Silver RA RAL Chart
				BO Copper

Suspended




FILUM 2575

LKS2 03750mm

GOOD NIGHT

Suspended

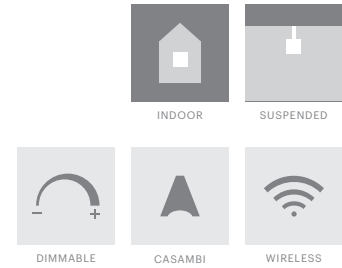

Installation	Indoor	CRI	> 90
Mounting Position	Suspended	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	5W	Dimensions	Ø25 h750mm
Lumen output	600	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimmmable on request)		



LKS203.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS203	5	27 2700	2 Medium 24°	10 White MO Metallic Copper
		30 3000		20 Black NO Metallic Gold
				40 Gold PO Metallic Chrome
				CO Silver RA RAL Chart
				BO Copper

Suspended




QUATTUOR 600

LKS3 19 586mm


GOOD NIGHT

Suspended



Installation	Indoor		
Mounting Position	Suspended		
IP	20		
Wattage	8,2W	12,3W	17,6W
Lumen output	1400	2000	2700
Connection	230V		
Driver	Included		
Dimmable	on/off (dimmable on request)		

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	586x35 h35mm
Adjustable	No

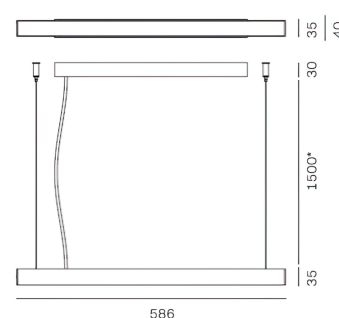

LKS319.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKS319	8	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	17	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

Suspended




QUATTUOR 900

LKS3 20 866mm


GOOD NIGHT

Suspended

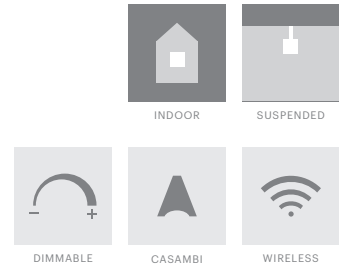

Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	12W 18W 26W
Lumen output	2100 3000 4000
Connection	230V
Driver	Included
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x35 h35mm
Adjustable	No

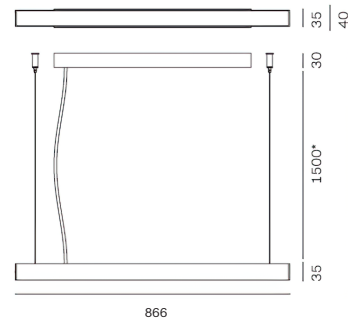

LKS320.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish	
LKS320	12	27 2700	6 Opal 120°	10 White	MO Metallic Copper
	18	30 3000		20 Black	NO Metallic Gold
	26	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	

QUATTUOR 1200

LKS3 21 1146mm


GOOD NIGHT

Suspended



Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	16W 24W 35W
Lumen output	2800 4000 5400
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1146x35 h35mm
Adjustable	No

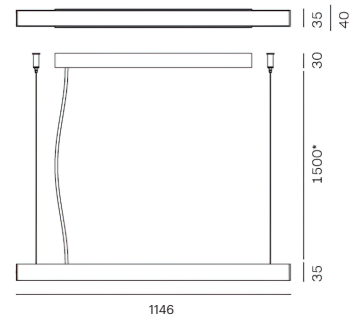

LKS320.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish										
LKS320	16	27 2700	6 Opal 120°	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														
	24	30 3000												
	35	40 4000												

PASTILLUM FARTUM 600


LKS4 22 646mm

GOOD NIGHT

Suspended



Installation	Indoor	CRI	> 90
Mounting Position	Suspended	Life Time	L80 / B10 72.000 h
IP	20	Cut-out Size	-
Wattage	9W 14W 19W	Dimensions	646x47,5 h125mm
Lumen output	1600 2200 3000	Adjustable	No
Connection	230V		
Driver	Included		
Dimmable	on/off (dimnable on request)		

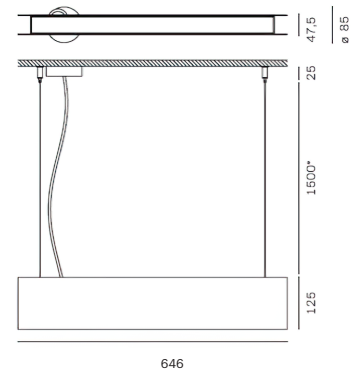

LKS422.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKS422	9	27 2700	6 Opal 120°	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														
	14	30 3000												
	19	40 4000												




PASTILLUM FARTUM 900

LKS4 23 926mm


GOOD NIGHT

Suspended



Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	13W 19W 28W
Lumen output	2300 3200 4300
Connection	230V
Driver	Included
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	926x47,5 h125mm
Adjustable	No

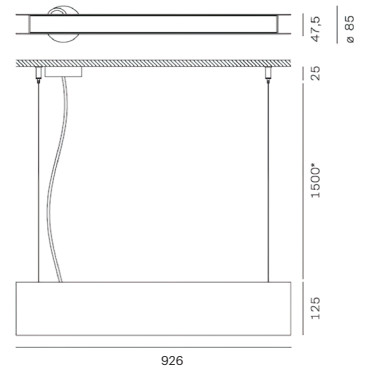

LKS423.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish										
LKS423	13	27 2700	6 Opal 120°	<table border="0"> <tr> <td>○ 10 White</td> <td>● MO Metallic Copper</td> </tr> <tr> <td>● 20 Black</td> <td>● NO Metallic Gold</td> </tr> <tr> <td>● 40 Gold</td> <td>● PO Metallic Chrome</td> </tr> <tr> <td>● CO Silver</td> <td>RA RAL Chart</td> </tr> <tr> <td>● BO Copper</td> <td></td> </tr> </table>	○ 10 White	● MO Metallic Copper	● 20 Black	● NO Metallic Gold	● 40 Gold	● PO Metallic Chrome	● CO Silver	RA RAL Chart	● BO Copper	
○ 10 White	● MO Metallic Copper													
● 20 Black	● NO Metallic Gold													
● 40 Gold	● PO Metallic Chrome													
● CO Silver	RA RAL Chart													
● BO Copper														
	19	30 3000												
	28	40 4000												



Suspended




PASTILLUM FARTUM 1200

LKS4 24 1206mm


GOOD NIGHT

Suspended



Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	17W 25W 36W
Lumen output	2800 4200 5700
Connection	230V
Driver	Included
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1206x47,5 h125mm
Adjustable	No

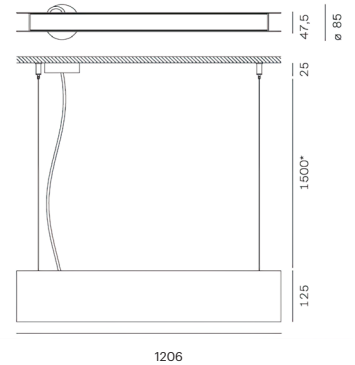


LKS424.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS424	17	27 2700		10 White 20 Black 40 Gold CO Silver BO Copper
	25	30 3000		MO Metallic Copper NO Metallic Gold PO Metallic Chrome
	36	40 4000		RA RAL Chart



Suspended


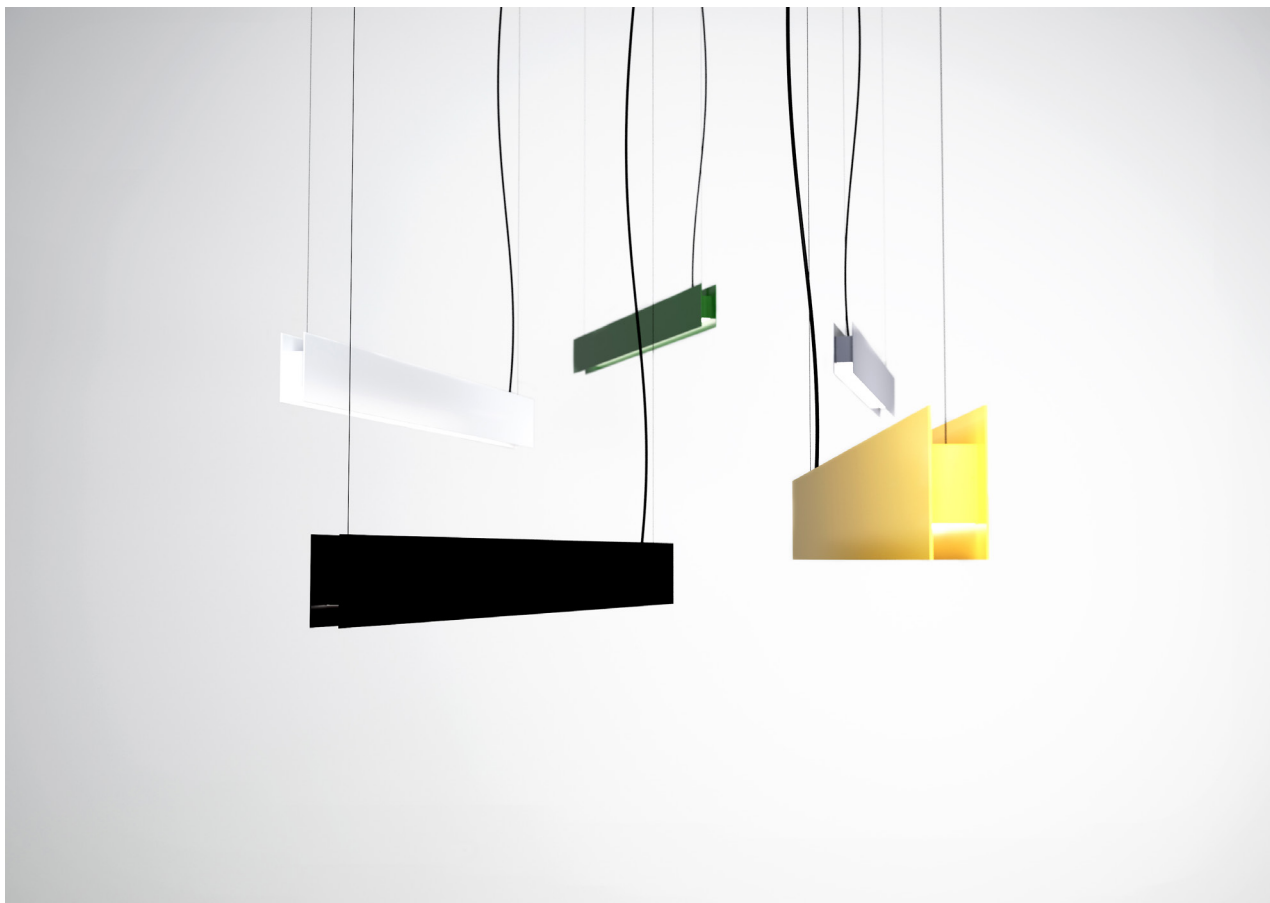


QUINQUE 600

LKS5 16 586mm UP & DOWN


GOOD NIGHT

Suspended

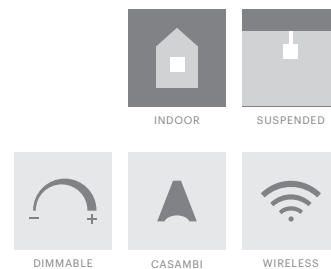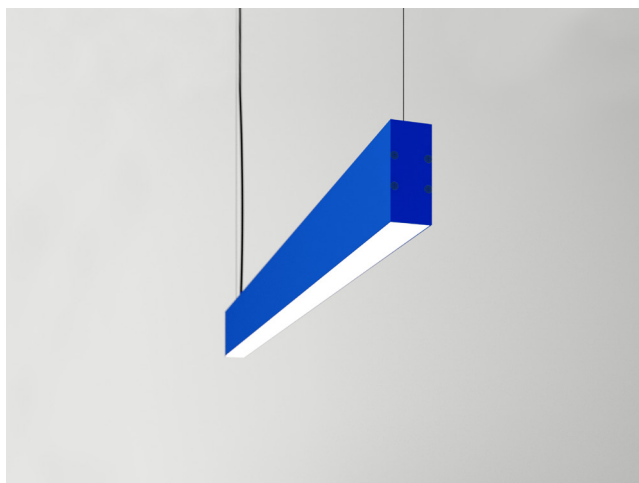

Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	2 x 8W 2 x 12W 2 x 18W
Lumen output	2 x 1400 2 x 2000 2 x 2700
Connection	230V
Driver	Included
Dimmable	on/off (dimnable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	586x43,5 h100mm
Adjustable	No

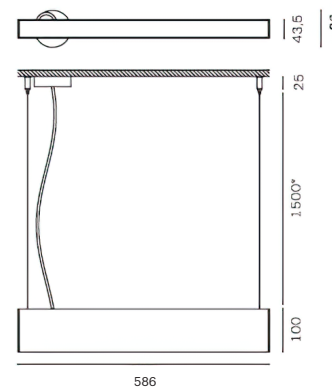


LKS516.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish	
LKS516	8	27 2700	6 Opal 120° (Up & Down)	10 White	MO Metallic Copper
	12	30 3000		20 Black	NO Metallic Gold
	18	40 4000		40 Gold	PO Metallic Chrome
				CO Silver	RA RAL Chart
				BO Copper	



Suspended


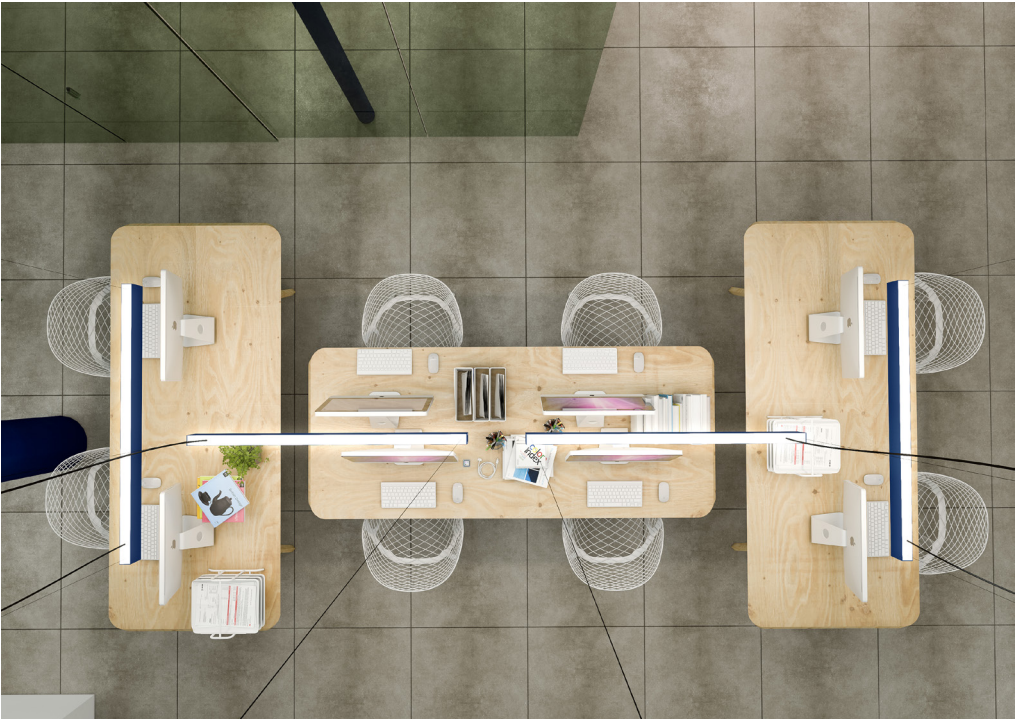


QUINQUE 900

LKS5 17 866mm UP & DOWN


GOOD NIGHT

Suspended

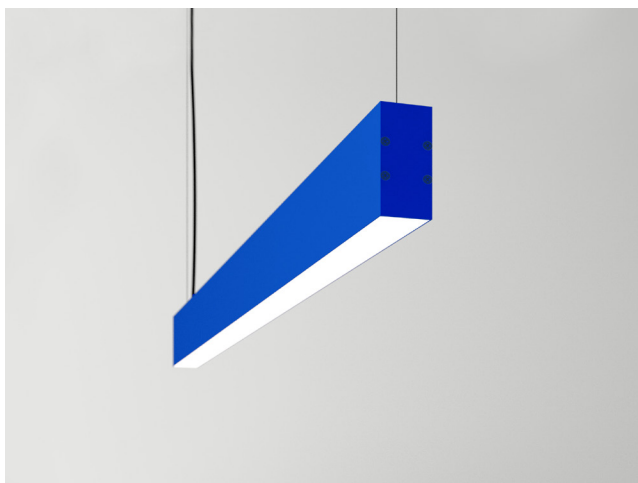

Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	2 x 12W 2 x 18W 2 x 26W
Lumen output	2 x 2100 2 x 3000 2 x 4100
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	866x43,5 h100mm
Adjustable	No

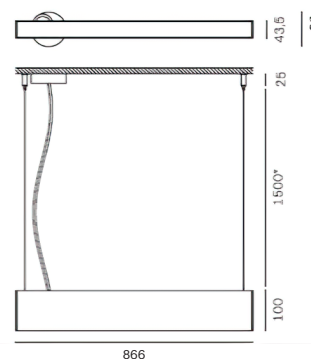

LKS517.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS517	12	27 2700		10 White MO Metallic Copper
	18	30 3000		20 Black NO Metallic Gold
	26	40 4000		40 Gold PO Metallic Chrome
				CO Silver RA RAL Chart
				BO Copper





QUINQUE 1200

LKS5 18 1146mm UP & DOWN


GOOD NIGHT

Suspended

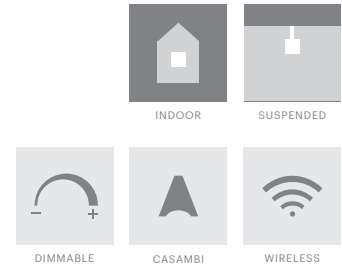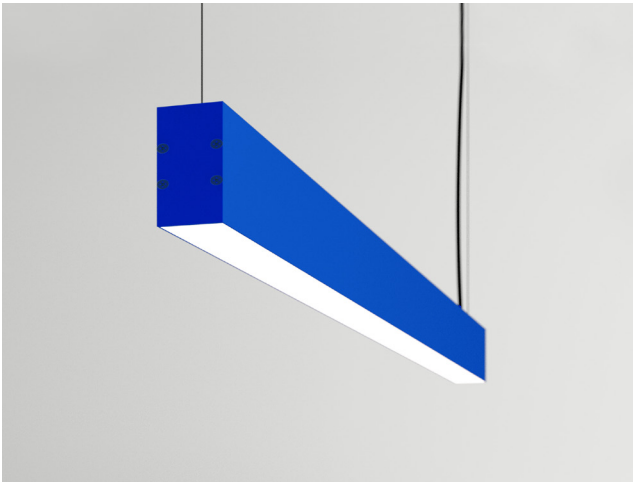

Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	2 x 16W 2 x 24W 2 x 35W
Lumen output	2 x 2800 2 x 4000 2 x 5400
Connection	230V
Driver	Included
Dimmable	on/off (dimmable on request)

CRI	> 90
Life Time	L80 / B10 72.000 h
Cut-out Size	-
Dimensions	1146x43,5 h100mm
Adjustable	No

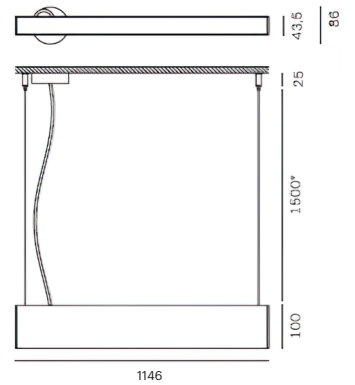

LKS518.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS518	16	27 2700		10 White 20 Black 40 Gold CO Silver BO Copper
	24	30 3000		MO Metallic Copper NO Metallic Gold PO Metallic Chrome
	35	40 4000		RA RAL Chart




GUTTA PENDULUS GU10

LKS6 01


GOOD NIGHT

Suspended



Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	GU10
Life Time	GU10
Cut-out Size	-
Dimensions	Ø120 h100mm
Adjustable	No

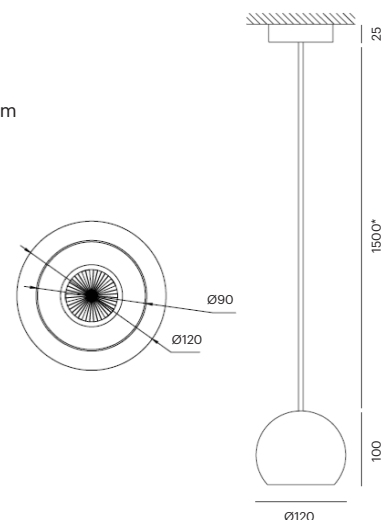

LKS601.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS601	GU10	XX Depending on lamp	XX Depending on lamp	<ul style="list-style-type: none"> <li style="width: 50%;">○ 10 White <li style="width: 50%;">● MO Metallic Copper <li style="width: 50%;">● 20 Black <li style="width: 50%;">● NO Metallic Gold <li style="width: 50%;">● 40 Gold <li style="width: 50%;">● PO Metallic Chrome <li style="width: 50%;">● CO Silver <li style="width: 50%;">RA RAL Chart <li style="width: 50%;">● BO Copper




NOLA GUTTA 370

LKS1 01


GOOD NIGHT

Suspended

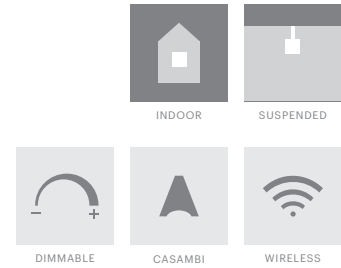

Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	max 50W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	Depending on lamp


CRI	E27
Life Time	E27
Cut-out Size	-
Dimensions	Ø370 h266mm
Adjustable	No

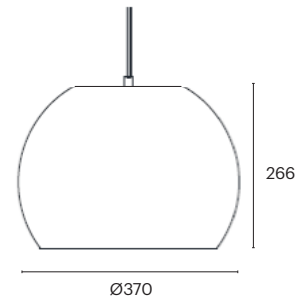

LKS101.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS101	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>

Suspended

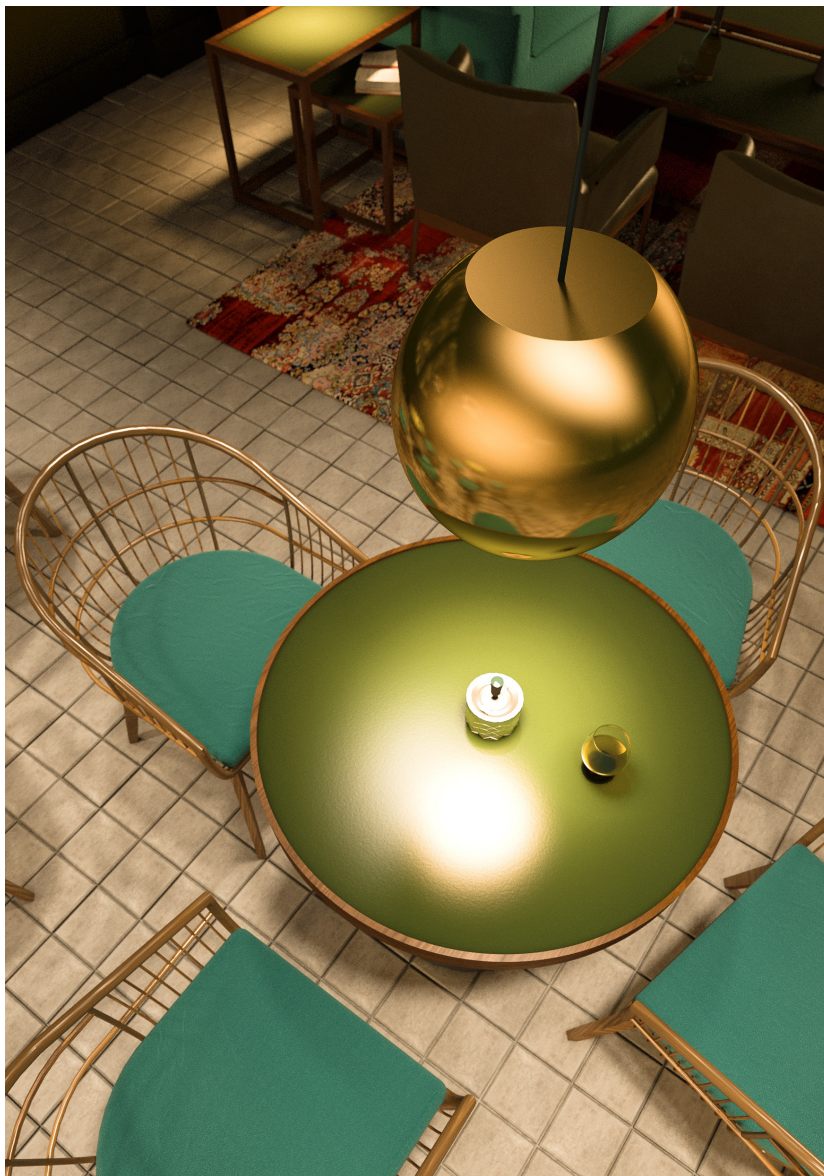


NOLA GUTTA 300

LKS1 02


GOOD NIGHT

Suspended

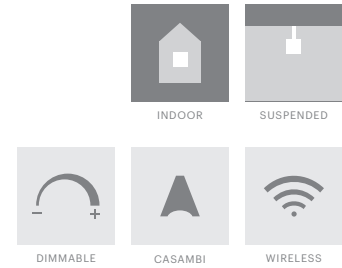

Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	max 50W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	E27
Life Time	E27
Cut-out Size	-
Dimensions	Ø300 h235mm
Adjustable	No

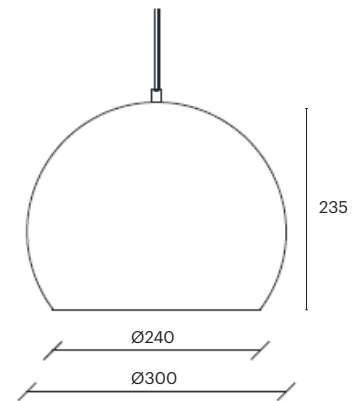

LKS102.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS102	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ⊙ MN Metal Copper & Metal Copper ⊙ NN Metal Gold & Metal Gold ⊙ PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>



NOLA SICCO 3927

LKS1 03

GOOD NIGHT

Suspended



INDOOR

SUSPENDED



DIMMABLE




CASAMBI




WIRELESS

Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø390 h270mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

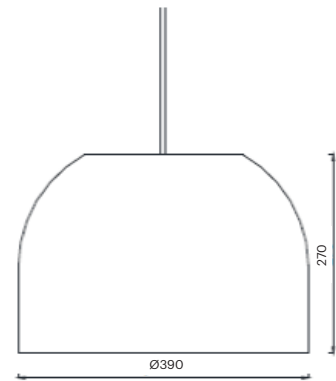

LKS103.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS103	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>

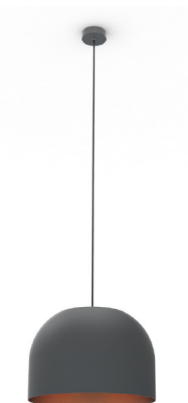


NOLA BASIC 3716


LKS1 04

GOOD NIGHT

Suspended

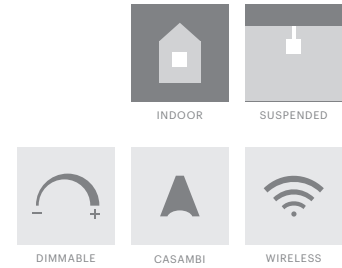

Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø370 h160mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

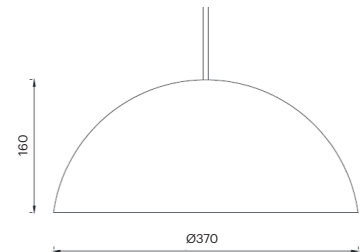

LKS104.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS104	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>




NOLA BASIC 1608


LKS1 05

GOOD NIGHT

Suspended



Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø370 h160mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

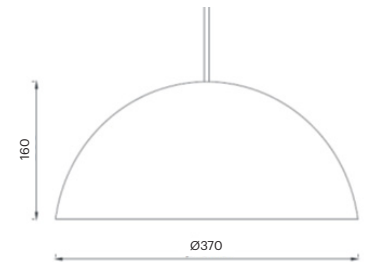

LKS105.**.**.**


Number	W	Colour Temperature	Light Distribution	Finish
LKS105	E27	XX	XX	<i>Exterior & Interior</i> ☉ 11 White & White Ⓞ MN Metal Copper & Metal Copper ● 21 Black & White Ⓞ NN Metal Gold & Metal Gold ● 22 Black & Black Ⓞ PP Metal Chrome & Metal Chrome ● 24 Black & Gold RA RAL chart ● 44 Gold & Gold Other combinations on request ● AA Corten & Corten

NOLA CONUS 1517


LKS2 02

GOOD NIGHT

Suspended

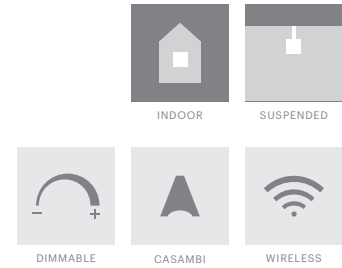


Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø155 h172mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

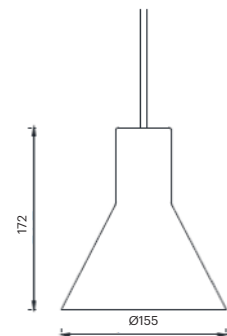

LKS2 02.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS202	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>

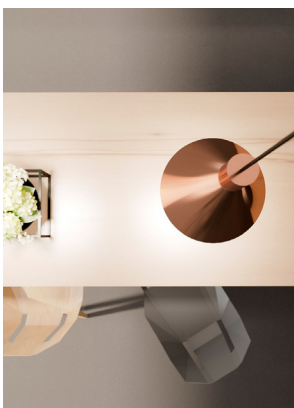


NOLA CONUS 2527


LKS2 01

GOOD NIGHT

Suspended



Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø250 h270mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

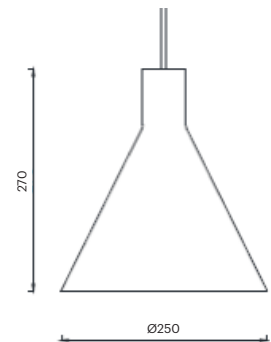

LKS2 02.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS201	E27	XX	XX	<i>Exterior & Interior</i> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>



Suspended




NOLA CLASSIC 3517


LKS3 01

GOOD NIGHT

Suspended



Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø350 h175mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

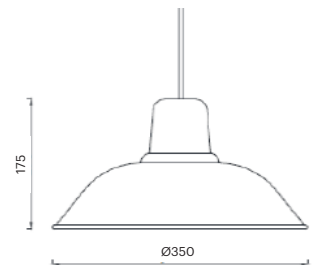

LKS3 01.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS301	E27	XX	XX	<i>Exterior & Interior</i> ◎ 11 White & White ◎ MN Metal Copper & Metal Copper ● 21 Black & White ◎ NN Metal Gold & Metal Gold ◎ 22 Black & Black ◎ PP Metal Chrome & Metal Chrome ● 24 Black & Gold RA RAL chart ◎ 44 Gold & Gold Other combinations on request ◎ AA Corten & Corten

Suspended




NOLA CLASSIC 2813

LKS3 02



GOOD NIGHT

Suspended

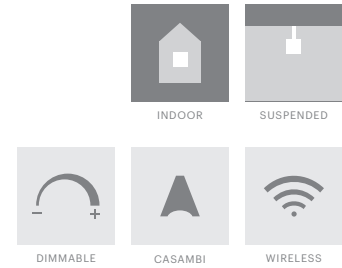

Installation	Indoor
Mounting Position	Suspended
IP	20
Wattage	max 50W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	Depending on lamp

CRI	E27
Life Time L70	E27
Cut-out Size	-
Dimensions	Ø283 h134mm
Adjustable	No

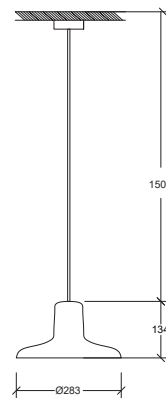

LKS3 02.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS302	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ⊙ MN Metal Copper & Metal Copper ⊙ NN Metal Gold & Metal Gold ⊙ PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>

Suspended




NOLA INDUSTRIAE 4726


LKS3 03

GOOD NIGHT

Suspended



Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø475 h260mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

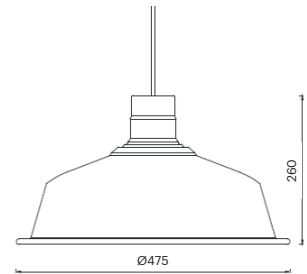

LKS3 03.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS303	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>




NOLA NORDIC 4619


LKS3 04

GOOD NIGHT

Suspended

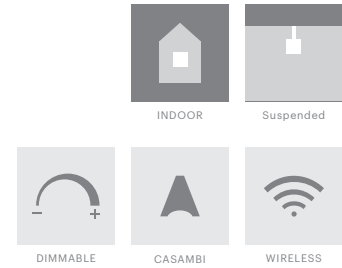

Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø460 h195mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

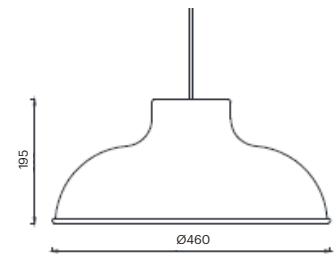

LKS3 04.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS304	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>




NOLA BONN 2322


LKS4 01

GOOD NIGHT

Suspended



Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø235 h220mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

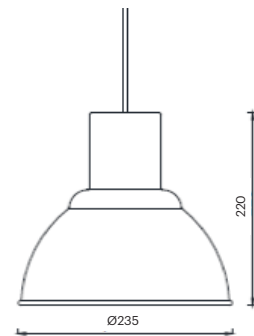

LKS4 01.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS401	E27	XX	XX	<i>Exterior & Interior</i> ◎ 11 White & White ◎ MN Metal Copper & Metal Copper ● 21 Black & White ◎ NN Metal Gold & Metal Gold ◎ 22 Black & Black ◎ PP Metal Chrome & Metal Chrome ● 24 Black & Gold RA RAL chart ◎ 44 Gold & Gold Other combinations on request ◎ AA Corten & Corten

Suspended




NOLA CAUPONA 1616


LKS4 02

GOOD NIGHT

Suspended

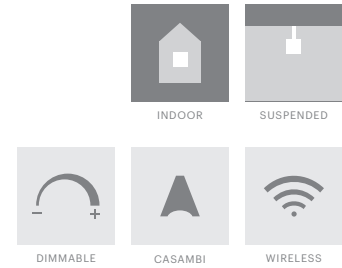


Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø163 h166mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

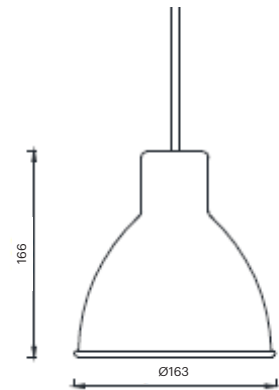

LKS4 02.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS402	E27	XX	XX	<i>Exterior & Interior</i> ☉ 11 White & White Ⓞ MN Metal Copper & Metal Copper ● 21 Black & White Ⓞ NN Metal Gold & Metal Gold ● 22 Black & Black Ⓞ PP Metal Chrome & Metal Chrome ● 24 Black & Gold ● 44 Gold & Gold ● AA Corten & Corten RA RAL chart Other combinations on request

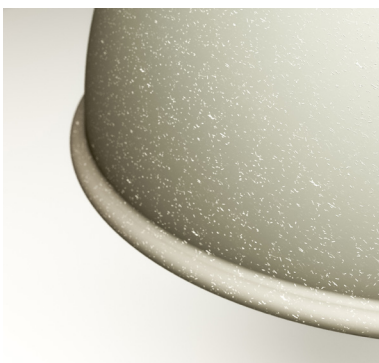

NOLA CAUPONA 2722

LKS4 03

GOOD NIGHT

Suspended



INDOOR

SUSPENDED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø270 h228mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

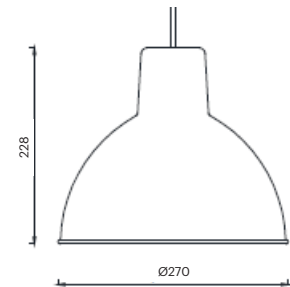

LKS4 03.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS403	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>



NOLA CAUPONA 3127

LKS4 04

GOOD NIGHT

Suspended



INDOOR

SUSPENDED



DIMMABLE




CASAMBI



WIRELESS

Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø315 h270mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

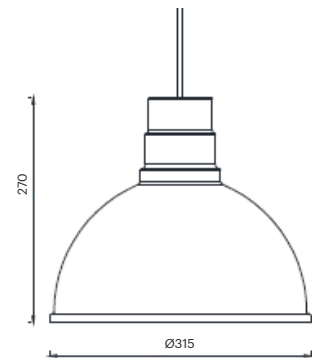

LKS4 04.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS404	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>



Suspended




NOLA SINA 5217


LKS5 01

GOOD NIGHT

Suspended




Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø522 h175mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

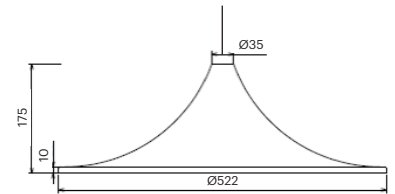

LKS5 01.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS5 01	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>



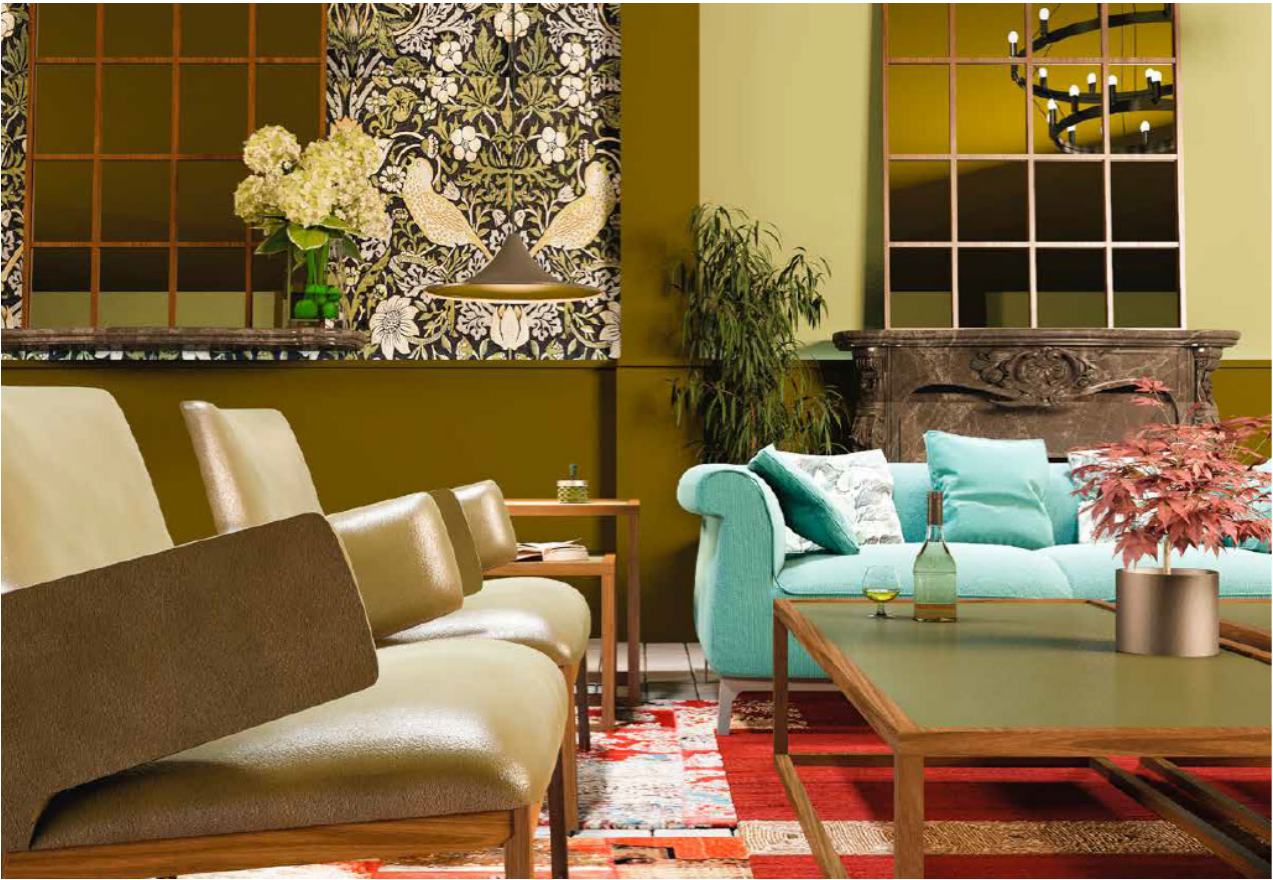


NOLA VOLANS 3216


LKS6 01

GOOD NIGHT

Suspended

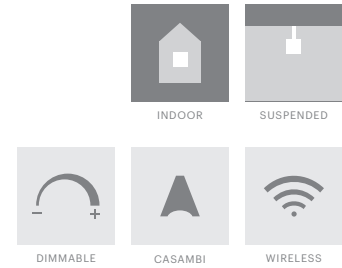

Installation	Indoor	CRI	E27
Mounting Position	Suspended	Life Time L70	E27
IP	20	Cut-out Size	-
Wattage	max 50W	Dimensions	Ø328 h162mm
Lumen output	E27	Adjustable	No
Connection	230V		
Driver	Not required		
Dimmable	Depending on lamp		

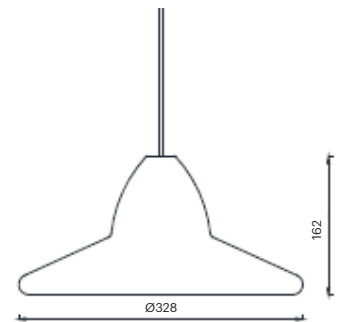

LKS6 01.**.**.*.**

Number	W	Colour Temperature	Light Distribution	Finish
LKS6 01	E27	XX	XX	<p><i>Exterior & Interior</i></p> <ul style="list-style-type: none"> ⊙ 11 White & White ● 21 Black & White ⊙ 22 Black & Black ● 24 Black & Gold ⊙ 44 Gold & Gold ● AA Corten & Corten ● MN Metal Copper & Metal Copper ● NN Metal Gold & Metal Gold ● PP Metal Chrome & Metal Chrome <p>RA RAL chart</p> <p>Other combinations on request</p>



Suspended



GOOD NIGHT

Good Night Lighting Special Products is the result of a passion for light, of a deep knowledge about lighting and a long experience in lights. It comes with the intention to bring good light to all areas, to make them more pleasant and appealing, by adapting to their particular needs and making lighting synonymous with beauty and atmosphere.

We understand our products as quality lighting solutions based on technology, design and awareness of light that only experience can provide. Our lights are carefully selected to meet the requirements that allow us to fulfill our commitment in terms of comfort, quality and guarantee

Contact us

Good Night Lighting
Santiago Rusiñol, 14 nave B5
Pol. Ind. Can Humet de Dalt
08213 - Polinyà
Barcelona

+34 935 285 434
info@goodnight-lighting.com
www.goodnight-lighting.com

GOOD NIGHT

Graphic design
EXITDESIGN

Product photography
EXITDESIGN

Good Night assumes no liability or responsibility for any errors or omissions in the content of this catalogue.

Good Night reserves the right to alter any model or characteristics without prior notice.

This catalogue replaces all previous catalogues.

Good Night® is a registered trademark.

www.goodnight-lighting.com