

A close-up, high-angle photograph of a lighting fixture. The fixture features a complex, geometric brass frame with thick, polished bars that intersect to form a series of overlapping diamond and rectangular shapes. The central part of the fixture is a circular glass lens with a prominent spiral or concentric ring pattern. The entire piece is set against a dark, almost black background, which makes the metallic and glass textures stand out. The lighting is dramatic, highlighting the reflective surfaces of the brass and the intricate details of the glass pattern.

GOOD NIGHT

Lighting Special Products

SINGULAR PRODUCTS

Orichalcum



Orichalcum

From nature to man. This family of products is made 100% with one of nature's most noble materials: brass. With multiple designs and up to a total of six finishes, along with the natural brass finish (which will age over time), ORICHALCUM becomes a useful, practical, beautiful, and essential product for many spaces. Enjoy it, you'll want to repeat.

De la nature à l'homme. Cette famille de produits est confectionnée à 100% avec l'un des matériaux nobles que la Nature nous offre : le laiton. Avec des designs multiples et jusqu'à un total de six finitions, associées à la finition naturelle en laiton (qui vieillira avec le temps), l'ORICHALCUM devient un produit utile, pratique, beau et indispensable pour de nombreux espaces. Profitez-en, vous allez répéter.



Product Elements of the page

Product name

Balnearis
10007

GOOD NIGHT
Recessed

Image



Technical information

Installation	Indoor	CRI	>90
Mounting Position	Ceiling recessed	Life Time	40.000 h
IP	20	Cut-out Size	Ø75 h80mm
Wattage	12W	Dimensions	Ø85 h70mm
Lumen Output	900	Adjustable	No
Connection	300mA		
Driver	Included remote		
Dimmable*	ON/OFF, DALI, PUSH (dimmmable drivers on request)		



1000712,**.5,10

Product reference

Number	W	Colour Temperature	Light Distribution	Finish	Dim
10007	12	27 2700 30 3000	5 Asymetric 50°	10 White	NDI* Driver included (non-dimmable) Dimmmable driver upon request

Symbols

Range of uses

- Indoor
- Outdoor
- Ceiling Recessed
- Wall Recessed
- Surface
- Suspended
- Track
- Spike
- Ground recessed
- Wall surface

Light distribution

- 1 Narrow
- 2 Medium
- 3 Wide
- 4 Superwide
- 5 Asymetric
- 5D Double asymetric
- 5L Asymetric left
- 5R Asymetric right
- 6 Opal
- 7A 50°x50°
- 7B 70°x70°
- 8 Elyptical
- 9 Zoom

Reference composition

GOOD NIGHT

10001.**.**.**

Number	W	Colour Temperature	Light Distribution	Finish
10001	11	27 2700	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> 1 Narrow 20° </div>	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; border: 1px solid black; border-radius: 50%;"></div> 10 White </div>
	15	30 3000	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> 2 Medium 40° </div>	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black; border-radius: 50%;"></div> 20 Black </div>
			<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: #ffc107; border: 1px solid black;"></div> 4 Superwide 60° </div>	

10001.11.27.4.10

Reference example →

GOOD NIGHT

10501.GU10.XX.X.90

Number	W	Colour Temperature	Light Distribution	Finish
10501	GU10	XX	X	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; border: 1px solid black; border-radius: 50%;"></div> 90 Gypsum </div>

10501.GU10.XX.X.90

Reference example →

Finishings

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> ○ 10 White ⊙ 11 White & White ◐ 12 White & Black ◑ 14 White & Gold ○ 17 White & Chrome ◐ 18 White & Copper ● 20 Black | <ul style="list-style-type: none"> ● 21 Black & White ⊙ 22 Black & Black ◑ 24 Black & Gold ● 26 Black & Dark Grey ● 30 Aluminium ◐ 32 Aluminium & Black ● 40 Gold | <ul style="list-style-type: none"> ● 60 Dark Grey ◐ 66 Dark Grey & Dark Grey ● 70 Chrome ● 80 Inox ○ 90 Gypsum |
|---|--|---|

Control

- Wireless
- Alexa, Siri, Google
- Casambi
- Dimmable

Special LED

- Other colour temperatures
- Special LED food and others
- Biodynamic
- Digital RGB
- RGB

Orichalcum **New**

Surface



Turtur
page 7



Nubilus
page 8



Lacerta
page 9



Drako
page 10



Clura
page 11



Papilio
page 13



Crocodilus
page 14



Talpa
page 15



Vistrum
page 17



Prandium
page 18



Camelum
page 19



Candidus
page 20



Pharus
page 21



Antillus
page 22



Clinatus
page 23



Proclivis
page 24



Promptus
page 25



Iugatus
page 26



Cluens
page 27



Ambactus
page 28




Situs
page 29



Cloccarium
page 30



Velum
page 31



Lama
page 32



Loculus
page 33



Lustrum
page 34



Pignus
page 35




Fabulari
page 37



Formosus
page 38



Ervum
page 39




Orichalcum
Supplementum
page 40

Turtur


70001

GOOD NIGHT

Orichalcum Surface

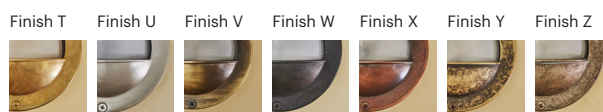

Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	64	Dimensions	200x140 h100mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27		
Connection	230V		
Driver	Not required		
Dimmable	E27		

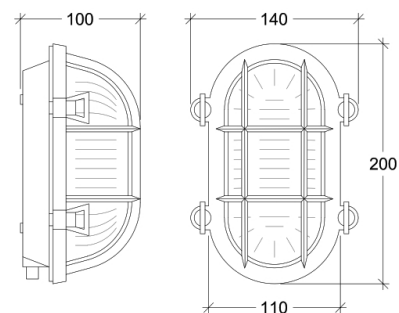

70001.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70001	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter





Nubilus

70002


GOOD NIGHT

Orichalcum Surface

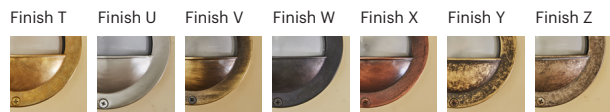

Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	222x106 h100mm
Adjustable	No

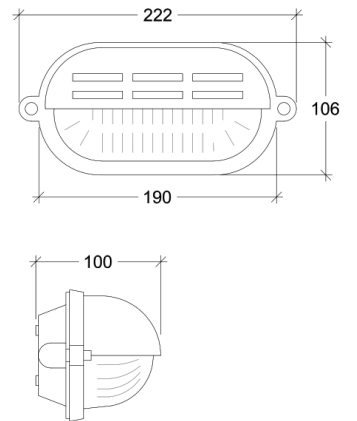

70002.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70002	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter





Lacerta

70003


GOOD NIGHT

Orichalcum Surface

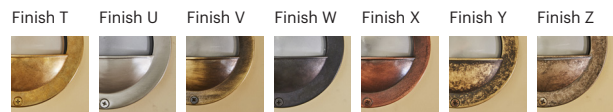

Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø140 h52mm
Adjustable	No

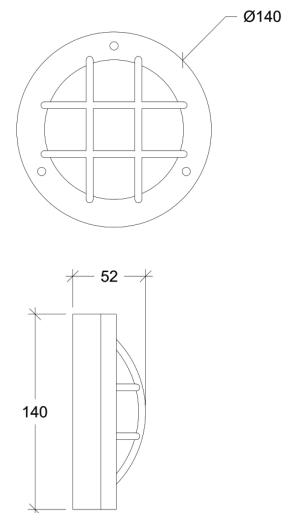

70003.30.**.**


Number	W	Colour Temperature	Light Distribution	Finish
70003	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

Drako

70004


GOOD NIGHT

Orichalcum Surface

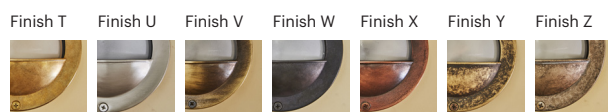





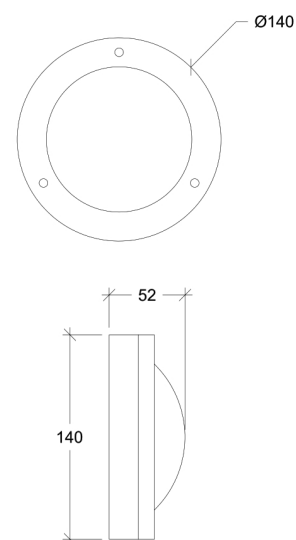



Installation	Outdoor
Mounting Position	Surface
IP	65
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø140 h52mm
Adjustable	No



70004.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70004	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

Clura

70005


GOOD NIGHT

Orichalcum Surface

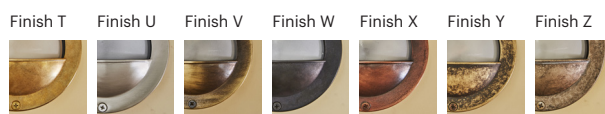

Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø175 h94mm
Adjustable	No

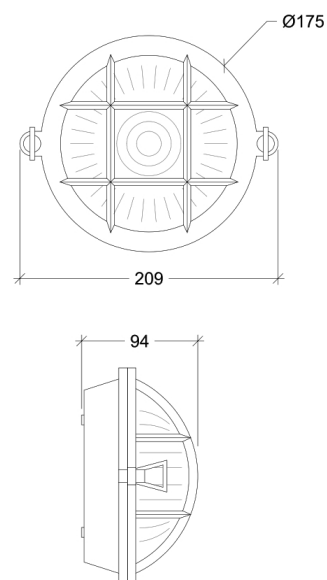

70005.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70005	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter




Papilio

70006


GOOD NIGHT

Orichalcum Surface

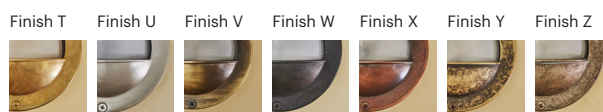





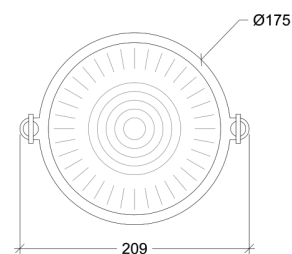



Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø175 h99mm
Adjustable	No





70006.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70006	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter




Option with grille

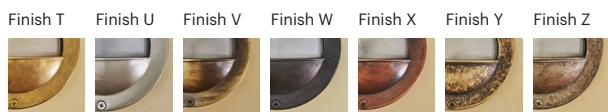

Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø218 h105mm
Adjustable	No

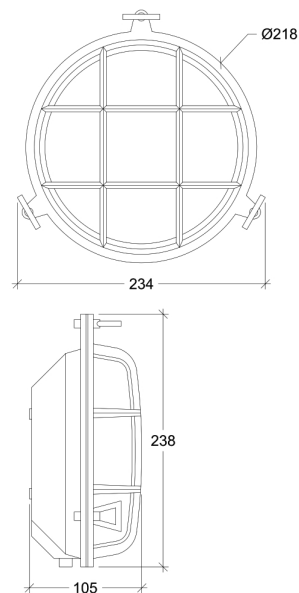

70007.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70007	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

Talpa

70008


GOOD NIGHT

Orichalcum Surface

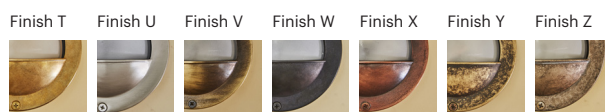

Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	G9
Lumen output	G9
Connection	230V
Driver	Not required
Dimmable	G9

CRI	G9
Life Time	G9
Dimensions	Ø140 h53mm
Adjustable	No

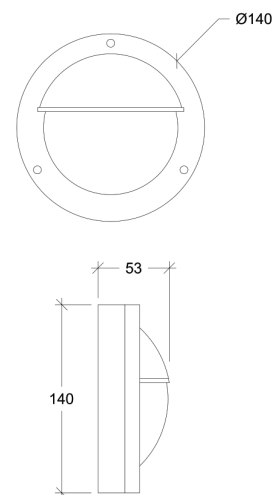

70008.G9.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70008	G9	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

Orichalcum Surface




Vistrum

70009



GOOD NIGHT

Orichalcum Surface

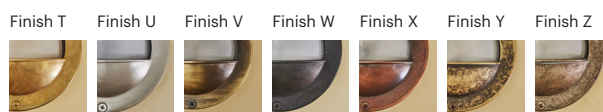

Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	G9
Lumen output	G9
Connection	230V
Driver	Not required
Dimmable	G9

CRI	G9
Life Time	G9
Dimensions	Ø140 h62mm
Adjustable	No

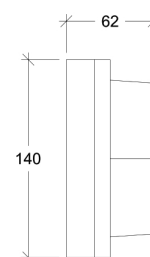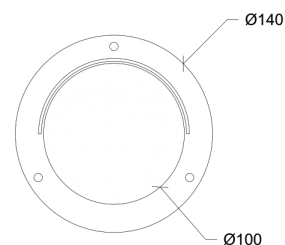

70009.G9.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70009	G9	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter





Prandium

70010


GOOD NIGHT

Orichalcum Surface

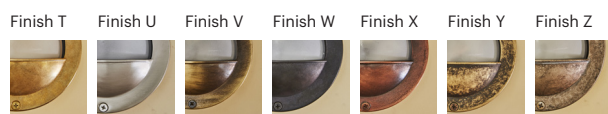





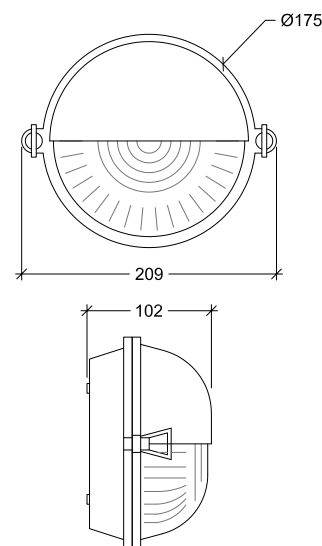



Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø175 h102mm
Adjustable	No



70010.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70010	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

Camelum


70011

GOOD NIGHT



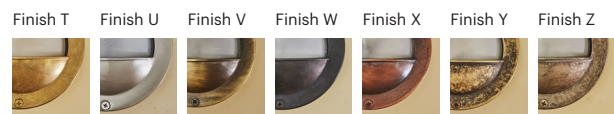



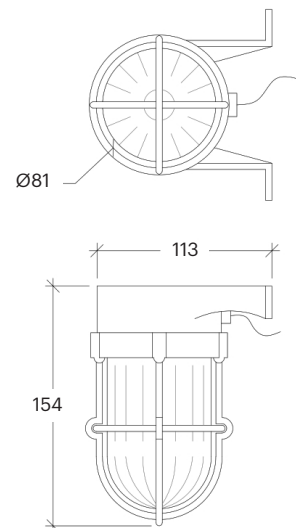

Orichalcum Surface



Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	64	Dimensions	Ø81x154 h113mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27		
Connection	230V		
Driver	Not required		
Dimmable	E27		



70011.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70011	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

Candidus

70012


GOOD NIGHT

Orichalcum Surface

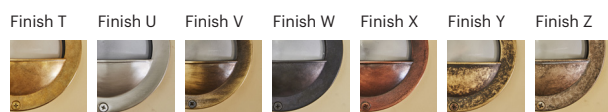





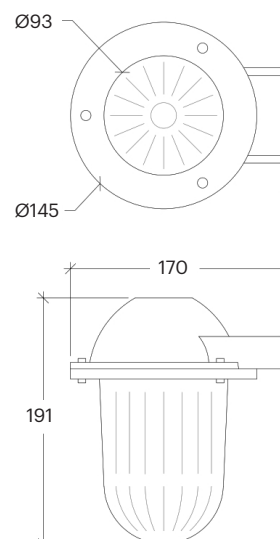



Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	-
Connection	230V
Driver	Not required
Dimmable	-

CRI	E27
Life Time	E27
Dimensions	Ø93x191 h170mm
Adjustable	No



70012.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70012	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

Pharus



70013

GOOD NIGHT

Orichalcum Surface

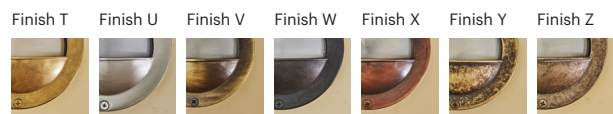

Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	64	Dimensions	Ø147 h169mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27		
Connection	230V		
Driver	Not required		
Dimmable	E27		

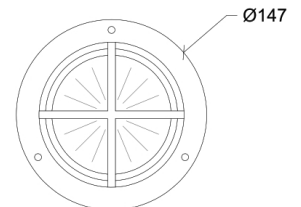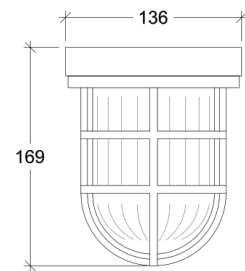

70013.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70013	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

Antillus

70014



GOOD NIGHT

Orichalcum Surface

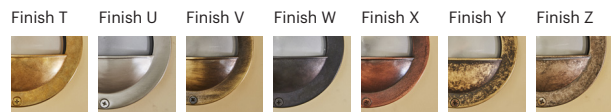





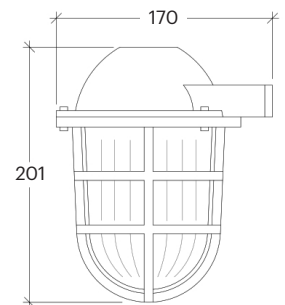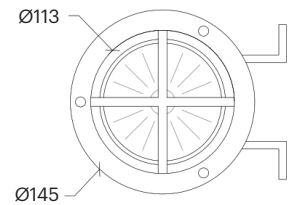



Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø113x201 h170mm
Adjustable	No



70014.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70014	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

Clinatus

70015


GOOD NIGHT

Orichalcum Surface

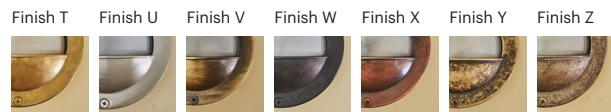

Installation	Outdoor
Mounting Position	Surface
IP	44
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø210x124 h330mm
Adjustable	No

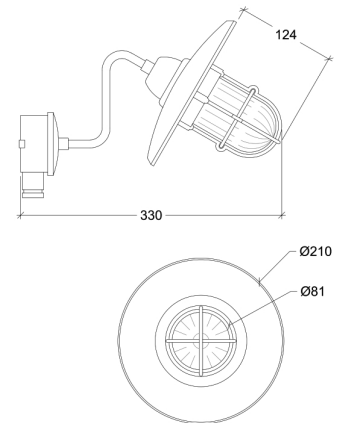

70015.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70015	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter





Proclivis


70016

GOOD NIGHT



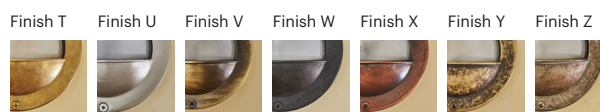



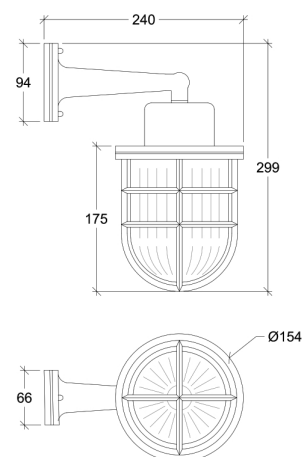

Orichalcum Surface



Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	64	Dimensions	Ø154x299 h240mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27		
Connection	230V		
Driver	Not required		
Dimmable	27		



70016.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70016	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter




Promptus

70017


GOOD NIGHT

Orichalcum Surface

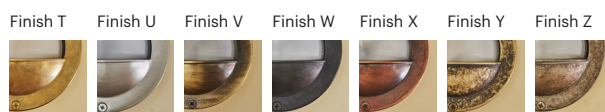

Installation	Outdoor
Mounting Position	Surface
IP	23
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø404 h722mm
Adjustable	No

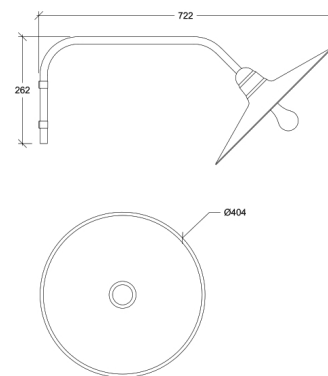

70017.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70017	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

lugatus


70018

GOOD NIGHT



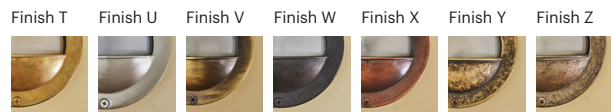



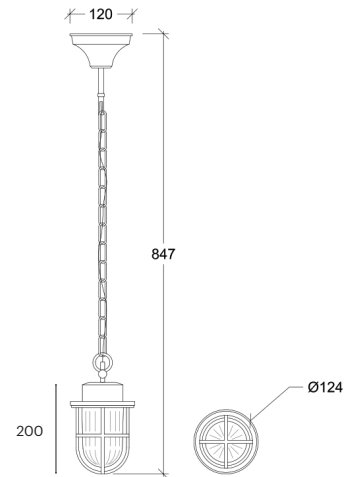

Orichalcum Suspended



Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	44	Dimensions	Ø124 h200mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27	Chain	550mm
Connection	230V		
Driver	Not required		
Dimmable	E27		



70018.E27.XX.4.*



Number	W	Colour Temperature	Light Distribution	Finish
70018	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

Cluens


70019

GOOD NIGHT

Orichalcum Suspended

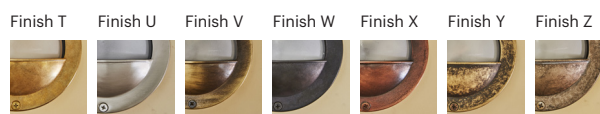

Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	44	Dimensions	Ø220 h260mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27	Chain	550mm
Connection	230V		
Driver	Not required		
Dimmable	E27		

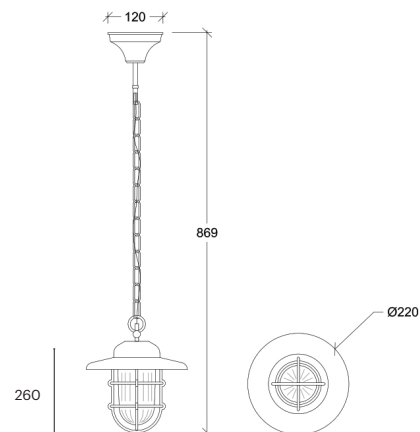

70018.E27.XX.4.*


Number	W	Colour Temperature	Light Distribution	Finish
70018	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

Ambactus


70020

GOOD NIGHT

Orichalcum Suspended

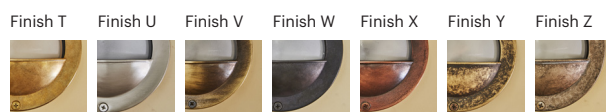

Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	44	Dimensions	Ø280 h320mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27	Chain	550mm
Connection	230V		
Driver	Not required		
Dimmable	E27		

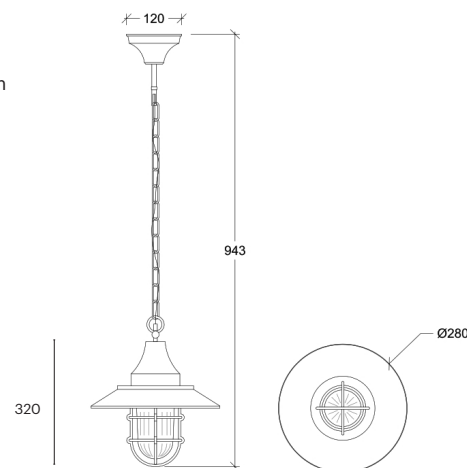

70018.E27.XX.4.*


Number	W	Colour Temperature	Light Distribution	Finish
70018	E27	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

Situs


70021

GOOD NIGHT



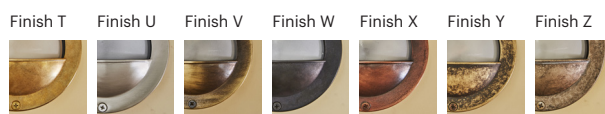



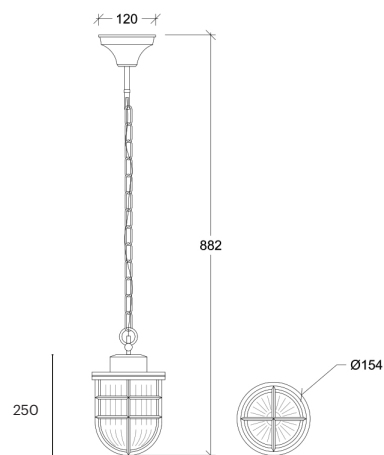

Orichalcum Suspended




Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	44	Dimensions	Ø154 h250mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27	Chain	550mm
Connection	230V		
Driver	Not required		
Dimmable	E27		




70021.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70021	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

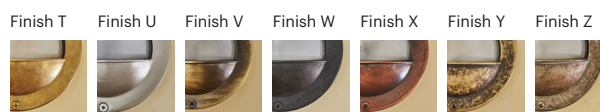





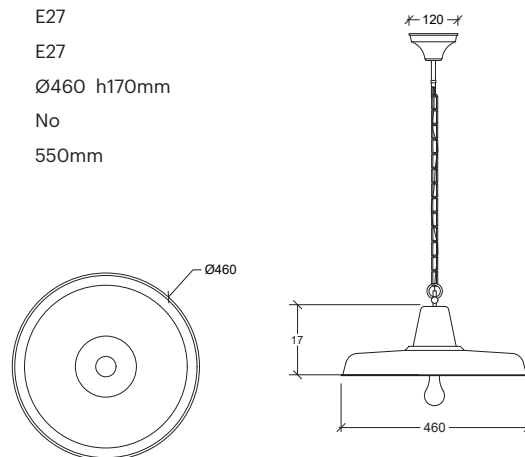



Installation	Interior
Mounting Position	Surface
IP	23
Wattage	max. 40W
Lumen output	E27
Connection	230V
Driver	Not required
Dimmable	E27

CRI	E27
Life Time	E27
Dimensions	Ø460 h170mm
Adjustable	No
Chain	550mm



70022.E27.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70022	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter




Velum


70023

GOOD NIGHT



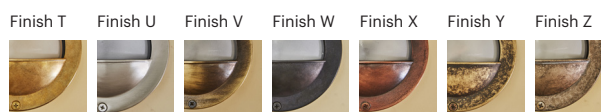



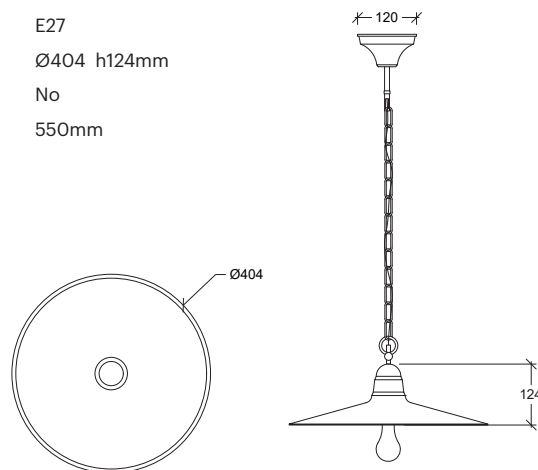

Orichalcum Suspended



Installation	Outdoor	CRI	E27
Mounting Position	Surface	Life Time	E27
IP	23	Dimensions	Ø404 h124mm
Wattage	max. 40W	Adjustable	No
Lumen output	E27	Chain	550mm
Connection	230V		
Driver	Not required		
Dimmable	E27		



70023.E27.XX.4.*


Number	W	Colour Temperature	Light Distribution	Finish
70023	E27	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter

Lama

70024


GOOD NIGHT

Orichalcum Surface

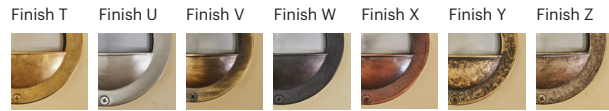

Installation	Outdoor
Mounting Position	Surface
IP	65
Wattage	G9
Lumen output	G9
Connection	230V
Driver	Not required
Dimmable	G9

CRI	G9
Life Time	G9
Dimensions	Ø67 h87mm
Adjustable	Yes

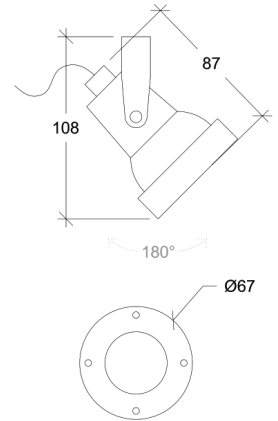

70024.G9.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70024	G9	XX	4 Superwide	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter




Loculus


70025

GOOD NIGHT



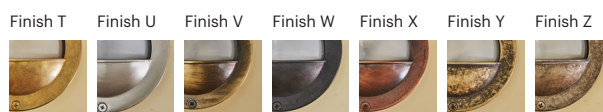



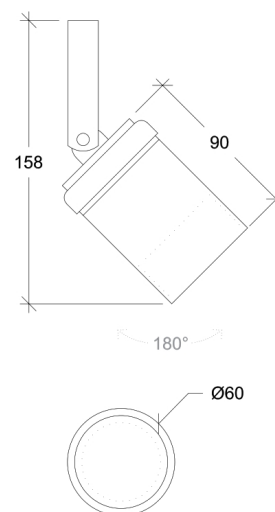

Orichalcum Surface





Installation	Outdoor	CRI	GU10
Mounting Position	Surface	Life Time	GU10
IP	64	Dimensions	Ø60 h90mm
Wattage	GU10	Adjustable	Yes
Lumen output	GU10		
Connection	230V		
Driver	Not required		
Dimmable	GU10		



70025.GU10.XX.4.*


Number	W	Colour Temperature	Light Distribution	Finish
70025	GU10	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter



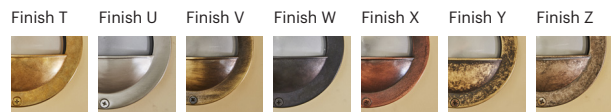





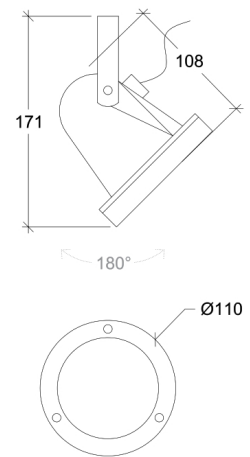



Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	GU10

CRI	GU10
Life Time	GU10
Dimensions	Ø110 h108mm
Adjustable	Yes



70026.GU10.XX.4.*

Number	W	Colour Temperature	Light Distribution	Finish
70026	GU10	XX	 4 Superwide	<ul style="list-style-type: none">  T Raw Brass  U Nickel matte  V Antique Brass  W Black Oxidation  X Antique Cooper  Y Matte Oxidation  Z Pewter





Pignus

70027



GOOD NIGHT

Orichalcum Surface

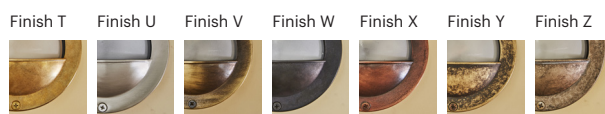

Installation	Outdoor
Mounting Position	Surface
IP	54
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	GU10


CRI	GU10
Life Time	GU10
Dimensions	Ø97x78 h117mm
Adjustable	No



70027.GU10.XX.X.*



Number	W	Colour Temperature	Light Distribution	Finish
70027	GU10	XX	X	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter



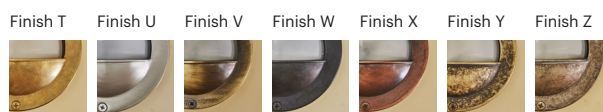

Installation	Outdoor
Mounting Position	Surface
IP	64
Wattage	GU10
Lumen output	GU10
Connection	230V
Driver	Not required
Dimmable	GU10

CRI	GU10
Life Time	GU10
Dimensions	Ø108x136 h119mm
Adjustable	No

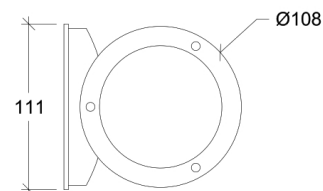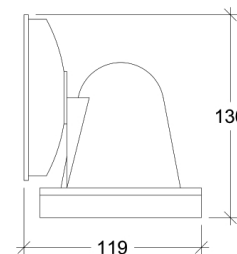

70028.GU10.XX.X.*


Number	W	Colour Temperature	Light Distribution	Finish
70028	GU10	XX	X	<ul style="list-style-type: none"> T Raw Brass U Nickel matte V Antique Brass W Black Oxidation X Antique Cooper Y Matte Oxidation Z Pewter

Formosus



70029

GOOD NIGHT

Orichalcum Surface

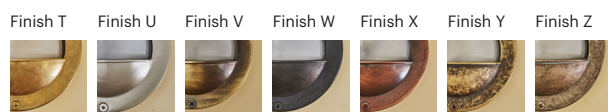

Installation	Outdoor	CRI	GU10
Mounting Position	Surface	Life Time	GU10
IP	64	Dimmensions	Ø60x94 h90mm
Wattage	GU10	Adjustable	No
Lumen output	GU10		
Connection	230V		
Driver	Not required		
Dimmable	GU10		



70029.GU10.XX.X.*



Number	W	Colour Temperature	Light Distribution	Finish
70029	GU10	XX	X	<ul style="list-style-type: none"> ● T Raw Brass ● U Nickel matte ● V Antique Brass ● W Black Oxidation ● X Antique Cooper ● Y Matte Oxidation ● Z Pewter

Ervum

70030



GOOD NIGHT

Orichalcum Surface

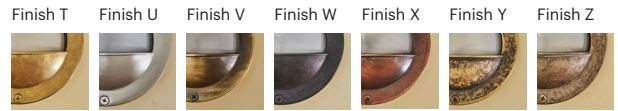


Installation	Outdoor
Mounting Position	Surface
IP	44
Wattage	2xGU10
Lumen output	2xGU10
Connection	230V
Driver	Not required
Dimmable	GU10

CRI	GU10
Life Time	GU10
Dimensions	Ø60x107 h160mm
Adjustable	No

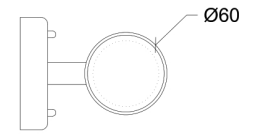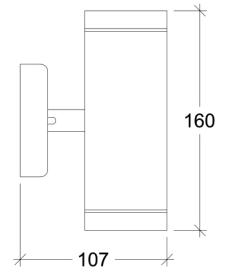

70030.GU10.XX.**

Number	W	Colour Temperature	Light Distribution	Finish
70030	2xGU10	XX	X	<ul style="list-style-type: none"> ● T Raw Brass ● U Nickel matte ● V Antique Brass ● W Black Oxidation ● X Antique Cooper ● Y Matte Oxidation ● Z Pewter


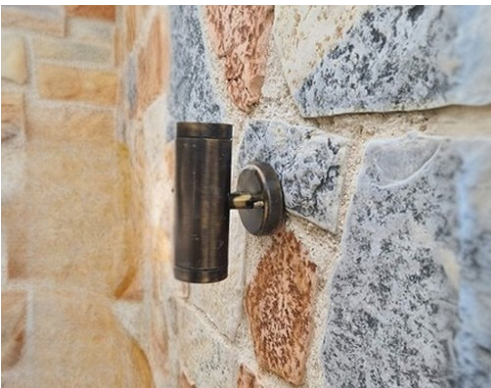


Orichalcum Supplementum

70999

GOOD NIGHT

Orichalcum Surface

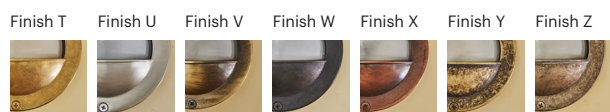

Installation	Outdoor
Mounting Position	Surface
Connection	230V

70999.**.*.*.*

Number	Finish
70999	T Raw Brass
	U Nickel matte
	V Antique Brass
	W Black Oxidation
	X Antique Cooper
	Y Matte Oxidation
	Z Pewter

Good Night Lighting Special Products is the result of a passion for light, of a deep knowledge about lighting and a long experience in lights. It comes with the intention to bring good light to all areas, to make them more pleasant and appealing, by adapting to their particular needs and making lighting synonymous with beauty and atmosphere.

We understand our products as quality lighting solutions based on technology, design and awareness of light that only experience can provide. Our lights are carefully selected to meet the requirements that allow us to fulfill our commitment in terms of comfort, quality and guarantee

Contact us

Good Night Lighting
Santiago Rusiñol, 14 nave B5
Pol. Ind. Can Humet de Dalt
08213 - Polinyà
Barcelona

+34 935 285 434
info@goodnight-lighting.com
www.goodnight-lighting.com

GOOD NIGHT

Graphic design
EXITDESIGN

Product photography
EXITDESIGN

Good Night assumes no liability or responsibility for any errors or omissions in the content of this catalogue.

Good Night reserves the right to alter any model or characteristics without prior notice.

This catalogue replaces all previous catalogues.

Good Night® is a registred trademark.

www.goodnight-lighting.com