





MGS48 is a system that is smart, modular and very easy to install. Its magnetic system allows for great flexibility with the lighting design of each space and lets us decide at the last moment which models we are going to use, since we can install the luminaires without the need for screws or any kind of tool. And, on top of that, the end user has the possibility to change the lighting design of his room depending on the needs of each moment. These qualities make the MGS48 system one of the most adaptable to current needs, plus we should always keep in mind that it also adjusts well to different kind of budgets

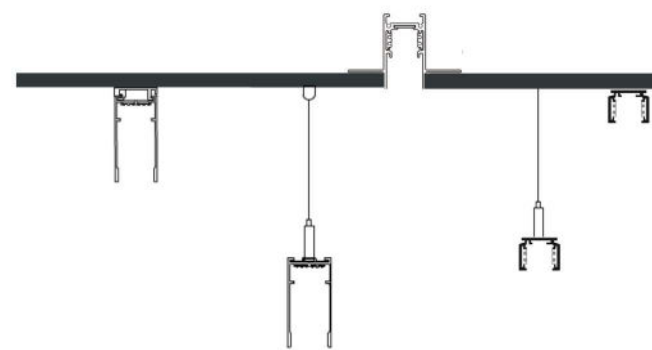


Suspended, Surface & Recessed

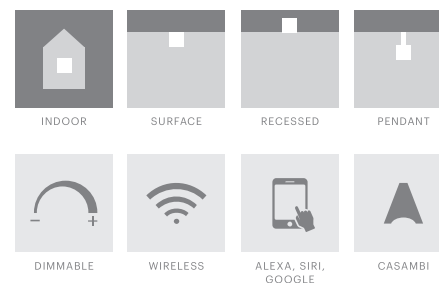



RIERA ORDEIX SHOP / PROJECT: SANDRA SOLER STUDIO / PHOTO: MONTSE CAPDEVILA

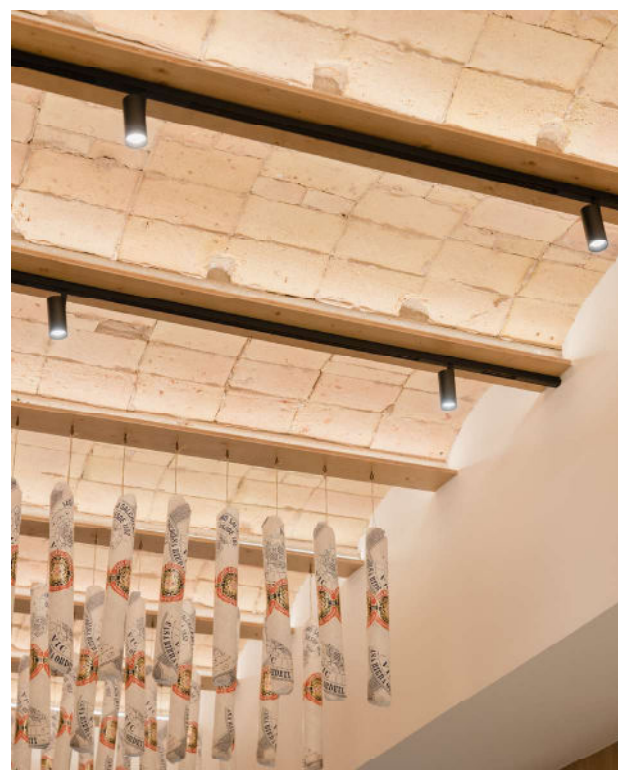



RIERA ORDEIX SHOP / PROJECT: SANDRA SOLER STUDIO / PHOTO: MONTSE CAPDEVILA







PROJECT: SANDRA SOLER STUDIO

1. Profile





Reference	Description	Finish
58.UM2M	Track 2m Short Surface / Suspended	○ 10 White ● 20 Black *Additional finishes available upon request

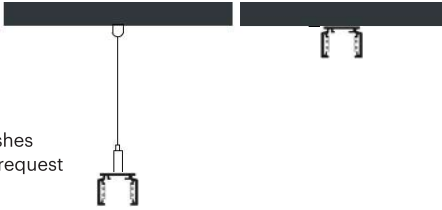

2. Accessories

Reference	Description	Finish	Detail
58.UMLCON	L Connector for ceiling	○ 10 White ● 20 Black	 
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	○ 10 White ● 20 Black	 
58.UMI	I Connector	○ 10 White ● 20 Black	 
58.UMFA	Flexible Connector	○ 10 White ● 20 Black	 
58.UMGNW	End Cover	○ 10 White ● 20 Black	 






Reference	Description	Finish	Detail
58.UMGW	End Cover with side hole for wire	○ 10 White ● 20 Black	 
58.UMLCOU	Coupler 180° between track-track or corner-track	○ 10 White ● 20 Black	 
58.UMD	Pendant Kit	○ 10 White ● 20 Black	 
58.UMA 58.UMB	L Corner 90° Horizontal - mechanical L Corner 90° Vertical - mechanical	○ 10 White ● 20 Black	 




1. Profile

Reference	Description	Finish
58.UMA2M	Track 2m High Surface / Suspended	○ 10 White ● 20 Black *Additional finishes available upon request

2. Accessories



Reference	Description	Finish	Detail	
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	○ 10 White ● 20 Black		
58.UMI	I Connector	○ 10 White ● 20 Black		
58.UMFA	Flexible Connector	○ 10 White ● 20 Black		
58.UMABGNW	End Cover	○ 10 White ● 20 Black		
58.UMABGW	End Cover with side hole for wire	○ 10 White ● 20 Black		

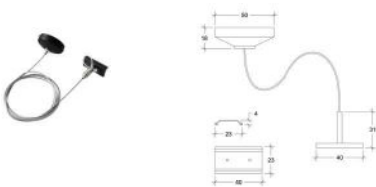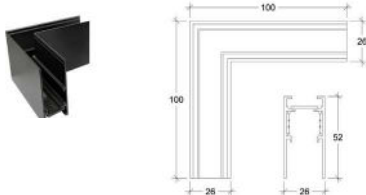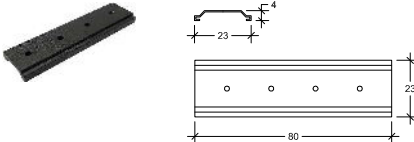




Reference	Description	Finish	Detail
58.UMABD	Pendant Kit	○ 10 White ● 20 Black	 The image shows a pendant kit consisting of a black cable with a plug and a mounting bracket. The dimensions are: cable length 100, plug diameter 25, mounting bracket width 40, and mounting bracket height 25.
58.UMBA	L Corner 90° Horizontal - mechanical	○ 10 White ● 20 Black	 The image shows an L-shaped corner bracket. The dimensions are: overall length 100, overall width 26, and corner radius 52.
58.UMABL	Coupler 180° between track-track or corner-track	○ 10 White ● 20 Black	 The image shows a coupler bracket. The dimensions are: overall length 80, overall width 23, and corner radius 4.
58.UMABM	Dust-Proof Cover 1.00 M	○ 10 White ● 20 Black	 The image shows a dust-proof cover. The dimensions are: overall length 24, overall width 5.

1. Profile




Reference	Description	Finish
58UMBM2	Track Recessed 2.00 M	10 White 20 Black *Additional finishes available upon request

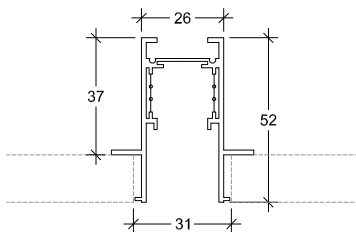

2. Accessories




Reference	Description	Finish	Detail
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	10 White 20 Black	 
58.UMI	I Connector	10 White 20 Black	 
58.UMFA	Flexible Connector	10 White 20 Black	 
58.UMABGNW	End Cover	10 White 20 Black	 
58.UMABGW	End Cover with side hole for wire	10 White 20 Black	 




Reference	Description	Finish	Detail
58.UMABD	Pendant Kit	10 White 20 Black	 
58.UMBA	L Corner 90° Horizontal - mechanical	10 White 20 Black	 
58.UMABL	Coupler 180° between track-track or corner-track	10 White 20 Black	 
58.UMABM	Dust-Proof Cover 1.00 M	10 White 20 Black	 

58110.*.*.*.NDI/DAL


3. Light Modules

NANO PUNCTO	Number	Description	W	CCT	Beam angle	Finish	Dim
 	58110	Spotlight S 480 lm	6	27 2700K	1 15°	○ 10 White	NDI (only 2700K)
				30 3000K	2 24°	● 20 Black	DAL (only 3000K)
					3 36°		
MICRO PUNCTO	Number	Description	W	CCT	Beam angle	Finish	Dim
 	58110	Spotlight M 1010 lm	12	27 2700K	1 15°	○ 10 White	DAL
				30 3000K	2 24°	● 20 Black	
					3 36°		
PUNCTO	Number	Description	W	CCT	Beam angle	Finish	Dim
 	58110	Spotlight L 2400 lm	30	30 3000K	1 15°	○ 10 White	DAL
					2 24°	● 20 Black	
					3 36°		

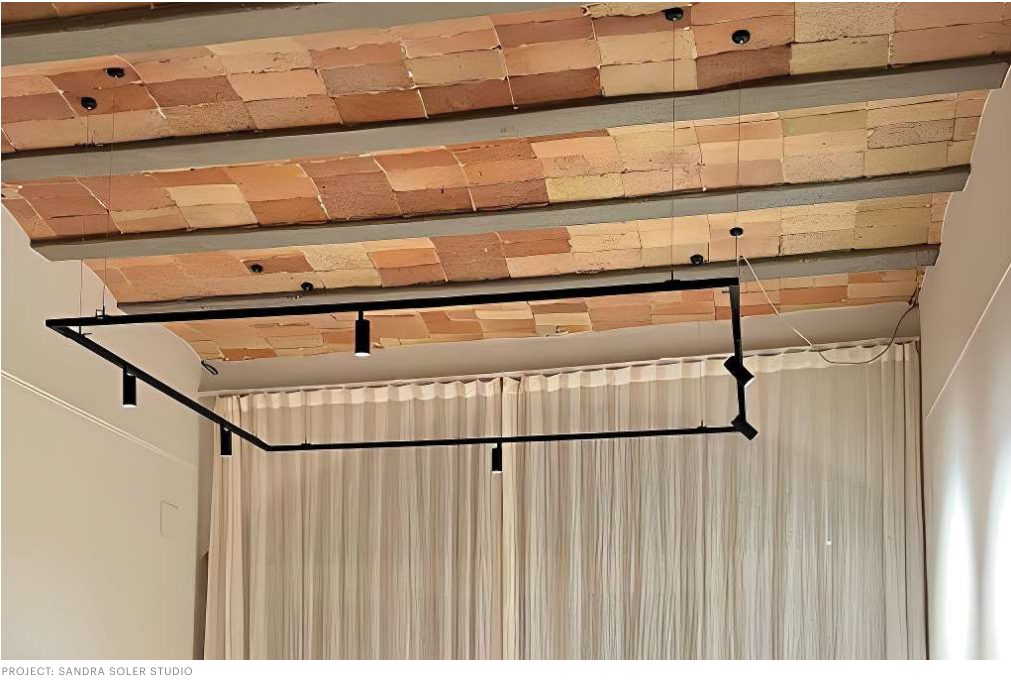


3. Light Modules

PANOPTES

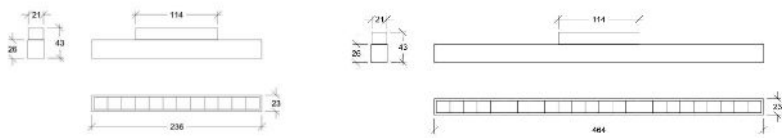

Number	Description	W	CCT	Beam angle	Finish	Dim
58120	Linearlight S 236 mm 400 lm	8	27 2700K	2 24°	○ 10 White	NDI
				3 45°	● 20 Black	
58120	Linearlight M 464 mm 1040 lm	16	30 3000K	2 24°	○ 10 White	DAL
				3 45°	● 20 Black	


CONTINUUM

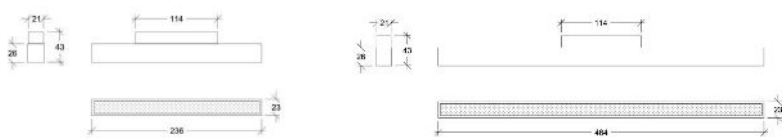

Number	Description	W	CCT	Beam angle	Finish	Dim
58120	Linear Opal S 236 mm 350 lm	8	27 2700K	4 100°	○ 10 White	NDI
					● 20 Black	
58120	Linear Opal M 464mm 850 lm	16	30 3000K	4 100°	○ 10 White	DAL
					● 20 Black	

Recessed / Surface / Suspended

POLYPHEMUS









Number	Description	W	CCT	Beam angle	Finish	Dim
58130	Pendant Light 800 lm	10	30 3000K	1 15°	○ 10 White	DAL
				2 25°	● 20 Black	
				3 35°		











PROJECT: SANDRA SOLER STUDIO





4. Accessories Summary

Detail	Reference	Description	Short	High	Rec	Finish	
	58.UMF30	Power Inlet Connector with Cable 30cm ON-OFF	x	x	x	○ 10 White ● 20 Black	
	58.UMF30DAL	Power Inlet Connector with Cable 30cm DALI	x	x	x		
	58.UMF60	Power Inlet Connector with Cable 180cm ON-OFF	x	x	x		
	58.UMF60DAL	Power Inlet Connector with Cable 180cm DALI	x	x	x		
	58.UMI	I Connector	x	x	x	○ 10 White ● 20 Black	
	58.UMFA	Flexible Connector	x	x	x	○ 10 White ● 20 Black	
	58.UMLCON	L Connector for ceiling	x	-	-	○ 10 White ● 20 Black	
	58.UMA	L Corner 90° Horizontal - mechanical	x	-	-	○ 10 White ● 20 Black	
	58.UMB	L Corner 90° Vertical - mechanical	x	-	-	○ 10 White ● 20 Black	
	58.UMAA	L Corner 90° Horizontal - mechanical	-	x	-	○ 10 White ● 20 Black	
	58.UMBA	L Corner 90° Horizontal - mechanical	-	-	x	○ 10 White ● 20 Black	

Detail	Reference	Description	Short	High	Rec	Finish	
	58.UMD	Pendant Kit	x	-	-	○ 10 White ● 20 Black	
	58.UMABD	Pendant Kit	-	x	x	○ 10 White ● 20 Black	
	58.UMLCOU	Coupler 180° between track-track or corner-track	x	-	-	○ 10 White ● 20 Black	
	58.UMABL	Coupler 180° between track-track or corner-track	-	x	x	○ 10 White ● 20 Black	
	58.UMGNW	End Cover	x	-	-	○ 10 White ● 20 Black	
	58.UMGW	End Cover with side hole for wire	x	-	-	○ 10 White ● 20 Black	
	58.UMABGNW	End Cover	-	x	x	○ 10 White ● 20 Black	
	58.UMABGW	End Cover with side hole for wire	-	x	x	○ 10 White ● 20 Black	
	58.UMABM	Dust-Proof Cover 1.00 M	-	x	x	○ 10 White ● 20 Black	


5. Drivers

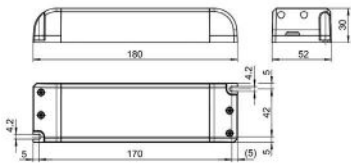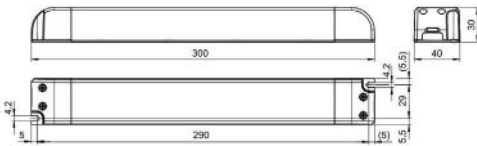Reference	Description	W	Dim
D4875	Driver 48VDC 75W VSLH 186691	75W	Non-Dimmable
			
D48120	Driver 48VDC 120W VSLH 186692	120W	Non-Dimmable
			




6. Examples


Profile 58.UM2M Short Suspended

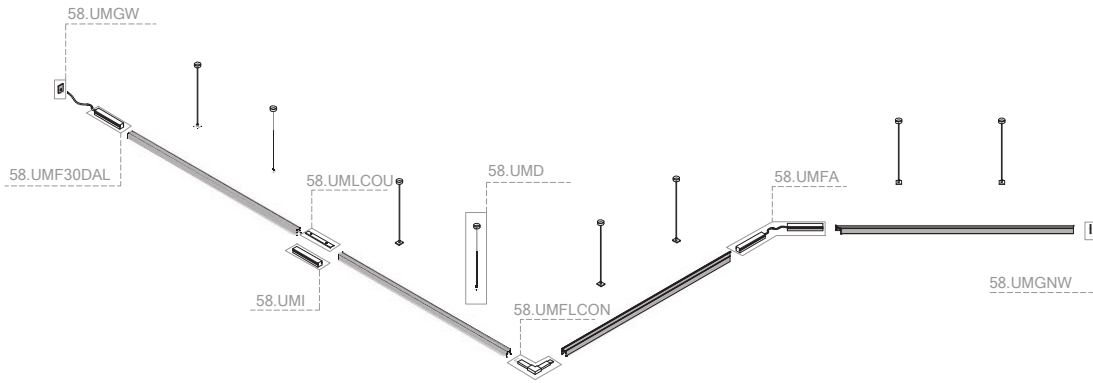

Profile 58.UMA2M High Suspended

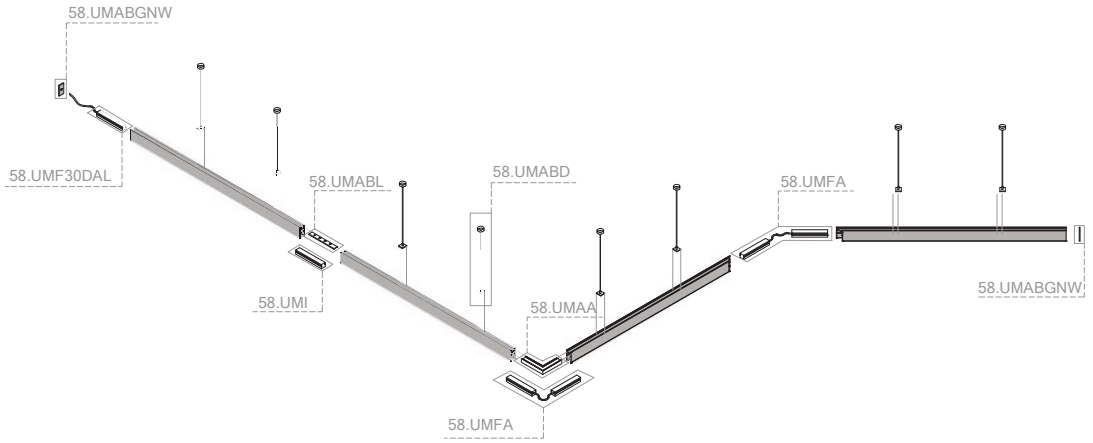

Profile 58.UM2M2 Recessed

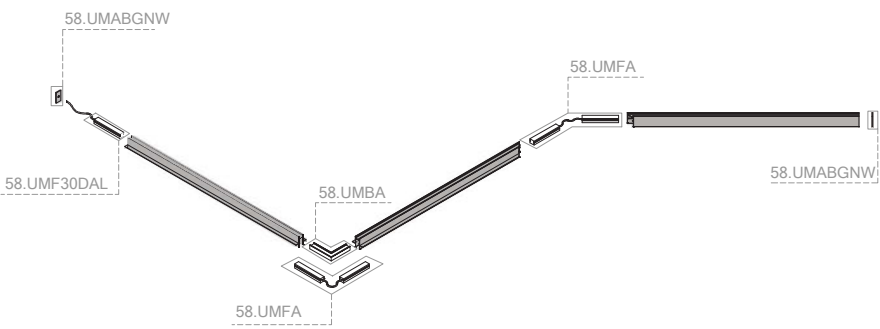


Ocultus

Recessed System

400


GOOD NIGHT

Smart System

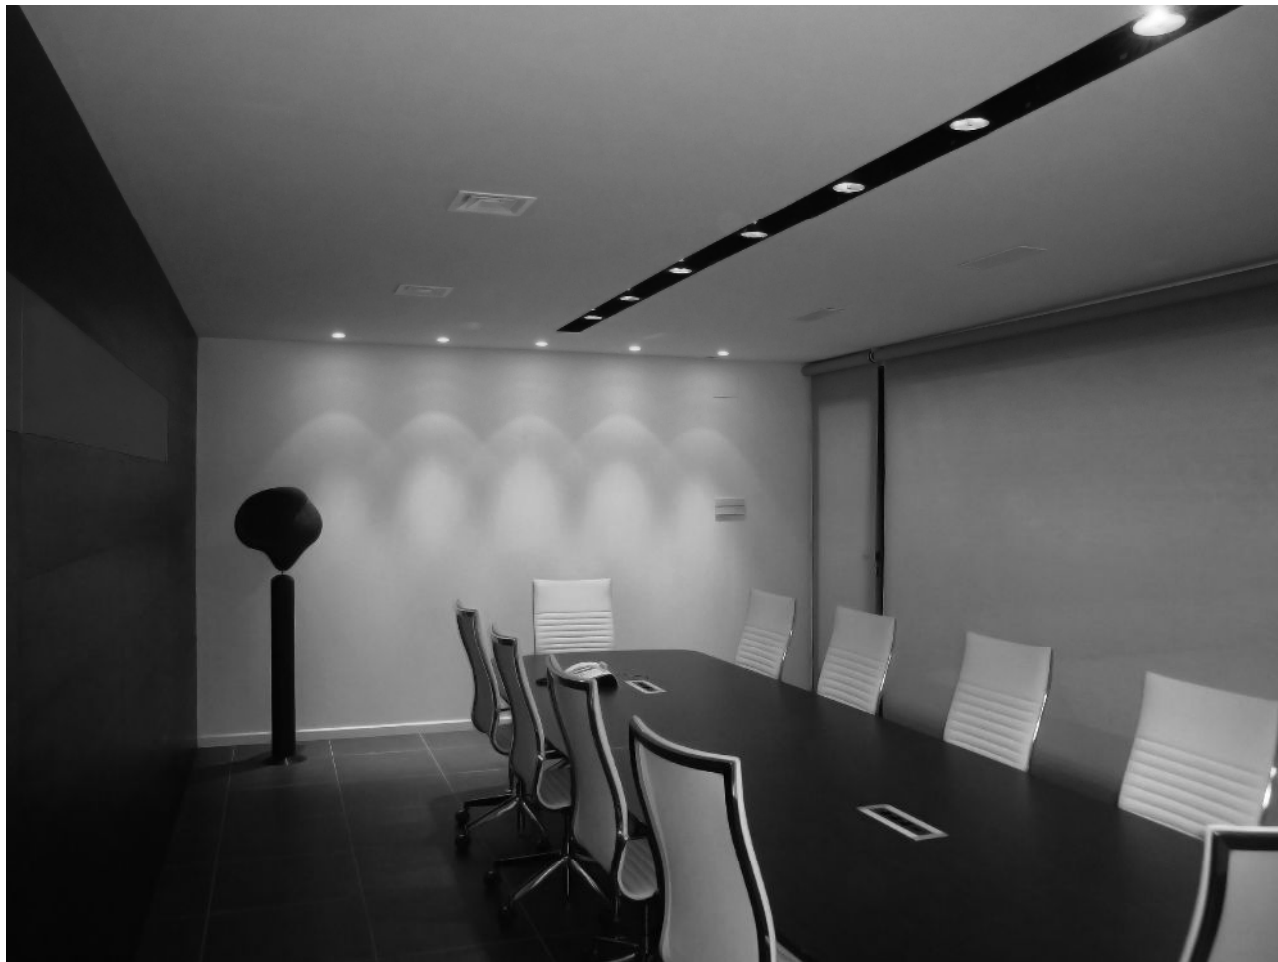


VILAR RIBA / PROJECT: SANDRA SOLER STUDIO

Ocultus is made up of a design of hidden aluminum tucked away within the ceiling that offers useful and discrete lighting capacities. Ocultus is designed to be out of sight while incorporating projectors that illuminate from within or, if desired, they can also be visible in any type of space inside of a store, museum, houses, etc...

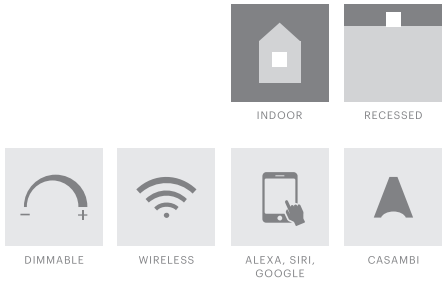

*Remote Driver. Custom configuration available upon request



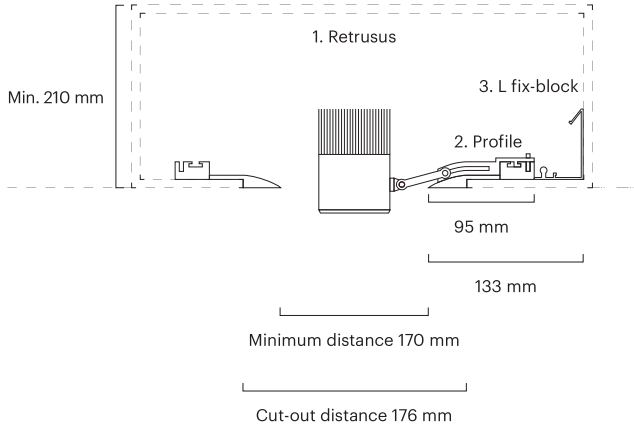


GOOD NIGHT

Recessed



Installation	Indoor	CRI	>85
Mounting Position	Recessed	Life Time	30.000 h
IP	20		
Wattage	15W 26W		
Connection	700mA		
Driver	Included (remote)		
Dimmable	1-10V dimming Dali dimming Non-dimmable		






Ocultus Profile

1. Profile

Ocultus codification	Model	Finish
Ocultus profile	40001.20.M	● 20 Black
Ocultus L fix-block	40001.A.1	
90° corner cut	40002	

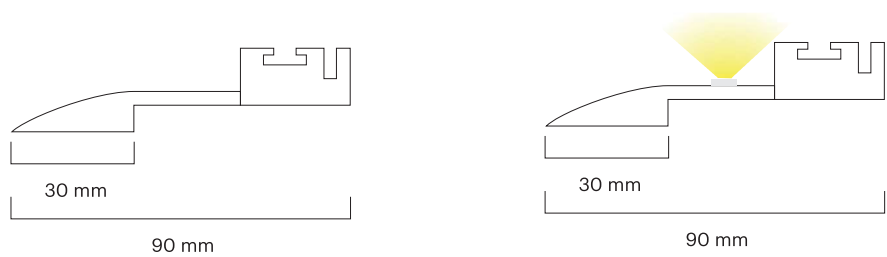

*Linear LED available upon request



Ocultus Spot

2. Retrusus

Ocultus codification	Model	W	K	Light distribution	Finish	Lumen output	Dimension
Retrusus-70	40015	15	2700	▲ 1 Narrow 15°	● 20 Black	1100	Ø65 L110
				▲ 2 Medium 24°			
				▲ 3 Wide 36°			

Ocultus codification	Model	W	K	Light distribution	Finish	Lumen output	Dimension
Retrusus-80	40026	26	3000	▲ 1 Narrow 15°	● 20 Black	2500	Ø81 L122
				▲ 2 Medium 24°			
				▲ 3 Wide 36°			

3. Driver

Driver Retrusus-70	113 x 42 x 31 mm (Remote included)
Driver Retrusus-80	103 x 65 x 31 mm (Remote included)



40001.A.1 (1 unit / 1m)