



INDOOR

OUTDOOR

SURFACE

WIRELESS

ALEXA, SIRI,
GOOGLE

DIMMABLE

CASAMBI

SPECIAL LED
FOOD AND
OTHERS

OTHER COLOUR
TEMPERATURE

BIODYNAMIC

DIGITAL RGB

RGB



Opticus is the product of the miniaturization of the LED profile combined with the capacity to control light through a single lens. The position of the LED using brackets in different locations makes it possible to set up the light according to the needs of the project: Narrow, Medium, Wide.



1. Profile

Reference	Description	Finish	Size
401.00	Opticus 2	10 White 20 Black 30 Aluminium	M Linear meter
*Additional finishes available upon request			


2. Cover

Reference	Light Distribution	Size
401.01	1 Narrow 15° 2 Medium 30° 3 Wide 60° 6 Opal 120°	M Linear meter

3. Endcap


Reference	Description	Finish
401.11	Endcap (2 units)	10 White 20 Black 30 Aluminium
401.11.01	Endcap plastic (2 units)	

Beam Angles

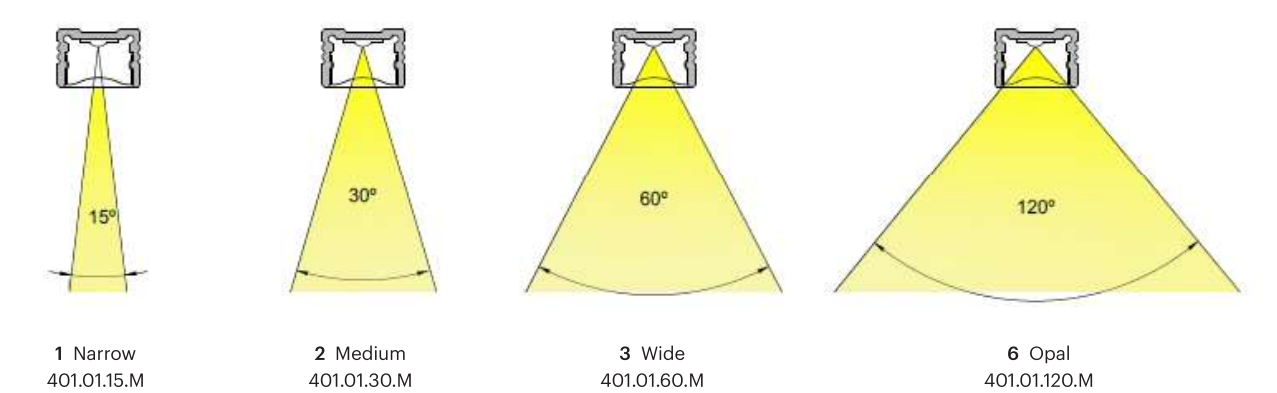

4. Fixations / Mounting kits

Reference	Description
401.21	Fixation clip (2 pieces)
401.22	Fixation clip 45° (2 pieces)
401.23	Fixation clip pivotable (2 pieces)

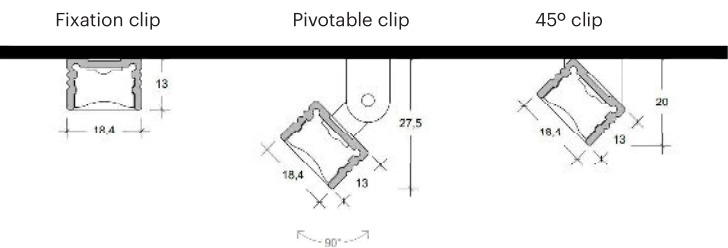

Pivotable clip




45° clip

5. Mechanical connections

Reference	Description
401.24	180° connector

6. LED Strip See LedStrip Section

7. Driver See Driver Section

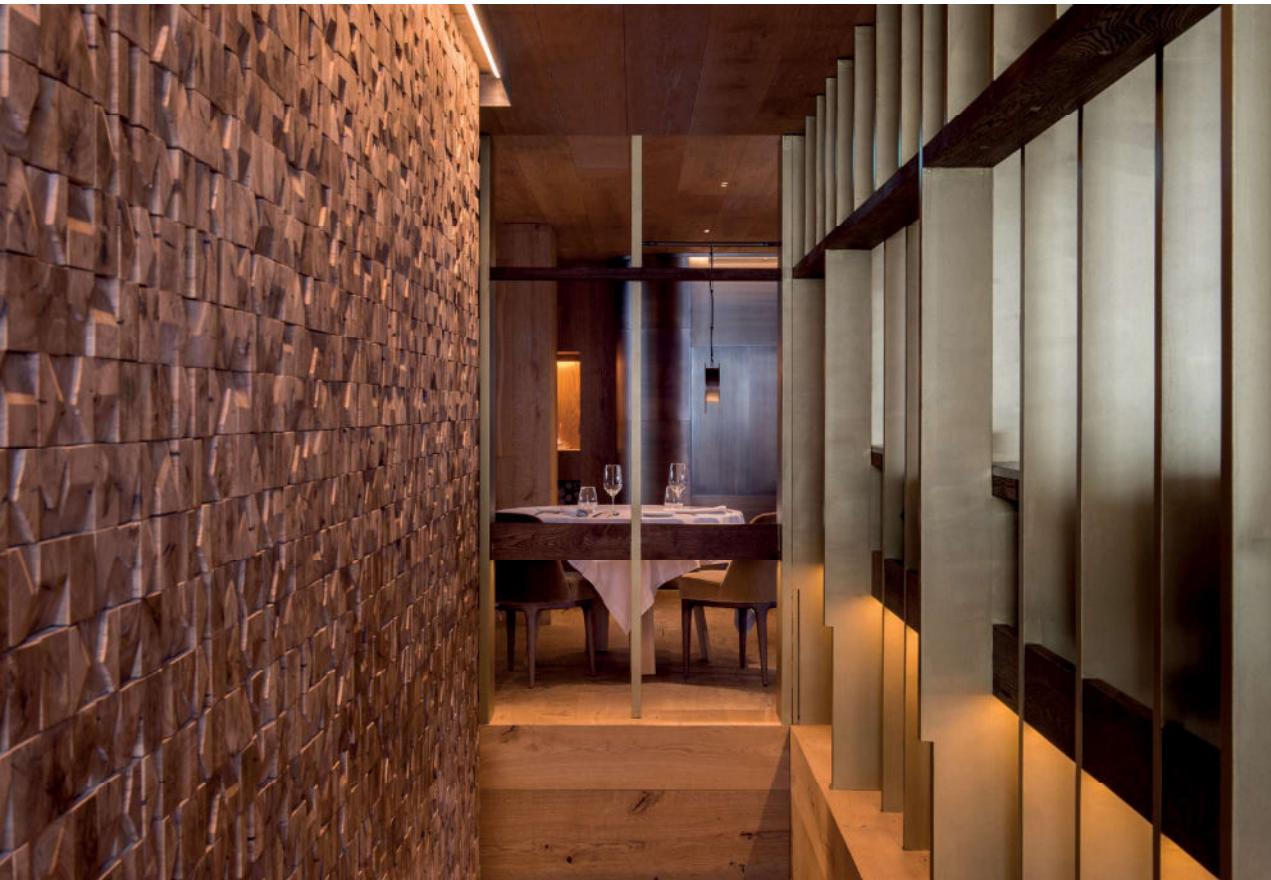

HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS / PHOTO: OLGA PLANAS



Pivotable



45°

Opticus-2

401




GOOD NIGHT

Compact Profiles

GOOD NIGHT

Surface

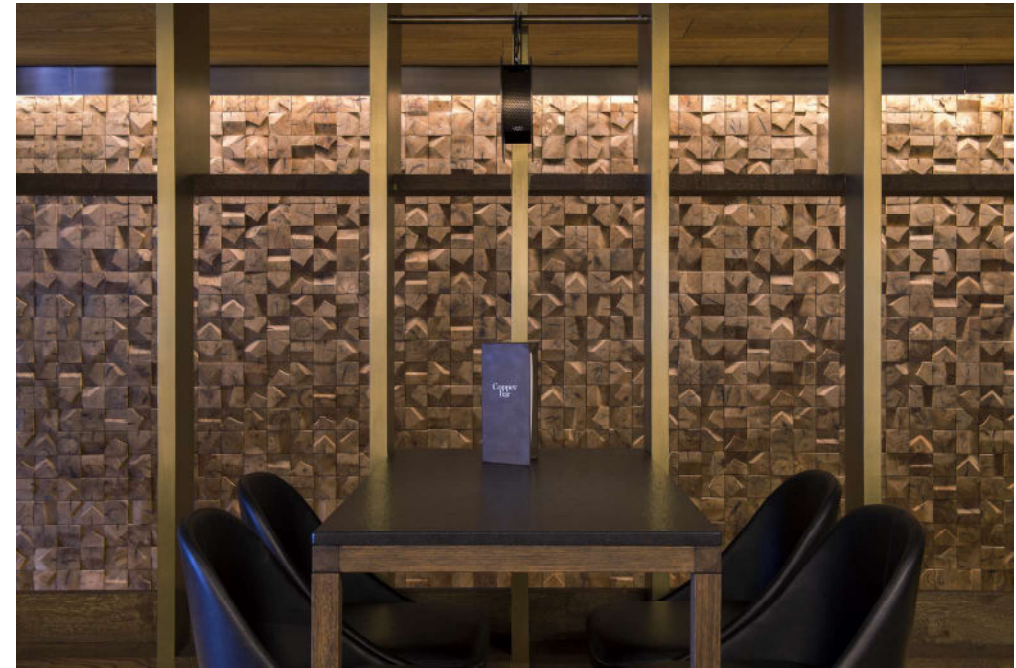

HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS / PHOTO: OLGA PLANAS



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCÉ GOST PHOTO