

2026/01

GOOD NIGHT

Lighting Special Products

Systems



Systems

Systems

Smart Systems



MGS 48
page 4



Ocultus
page 22



Sabrolumo
page 26

High Output Profiles



Momentum
Surface
page 32



Momentum
Recessed
page 42



Cubus-2
Surface
page 46



Cubus Recessed
page 56



Omnia
page 60



Mitis
page 64




Versatile
Surface
page 68

Compact Profiles



Abscondere
page 74



Aresta
page 80



Opticus-2
page 82



Magneticus
page 88




Supellex
Page 90




Macreo
Surface
page 94



Macreo
Recessed
Page 96



Murus
page 98



Flexibilis
page 102




Totus
page 106



Trahea
page 110



Angulus
page 114




Refundus-p
Page 116




Refundus-i
Page 118



Refundus-e
page 120



Big Refundus
page 122



Elis
page 124



Minimus-2
Surface
page 128





Minimus-2
Recessed
page 132



Big Minimus
page 136



MGS48 is a system that is smart, modular and very easy to install. Its magnetic system allows for great flexibility with the lighting design of each space and lets us decide at the last moment which models we are going to use, since we can install the luminaires without the need for screws or any kind of tool. And, on top of that, the end user has the possibility to change the lighting design of his room depending on the needs of each moment. These qualities make the MGS48 system one of the most adaptable to current needs, plus we should always keep in mind that it also adjusts well to different kind of budgets

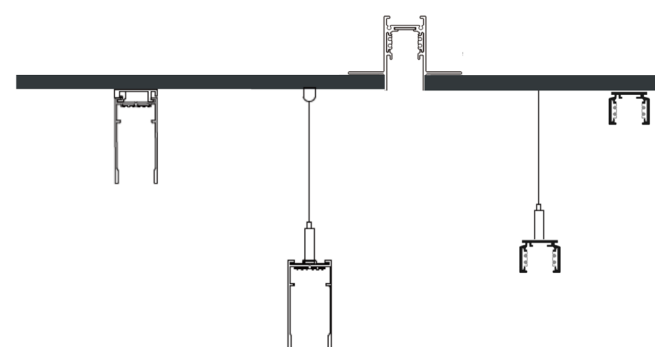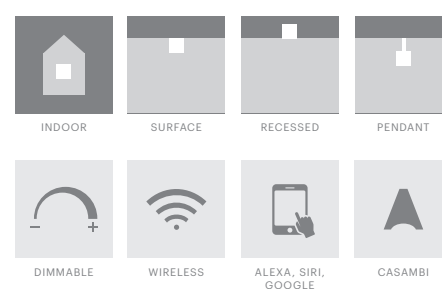

Suspended, Surface & Recessed





RIERA ORDEIX SHOP / PROJECT: SANDRA SOLER STUDIO / PHOTO: MONTSE CAPDEVILA





RIERA ORDEIX SHOP / PROJECT: SANDRA SOLER STUDIO / PHOTO: MONTSE CAPDEVILA




PROJECT: SANDRA SOLER STUDIO











1. Profile

Reference	Description	Finish
58.UM2M	Track 2m Short Surface / Suspended	<div><div></div>10 White</div> <div><div></div>20 Black</div> <div>*Additional finishes available upon request</div>

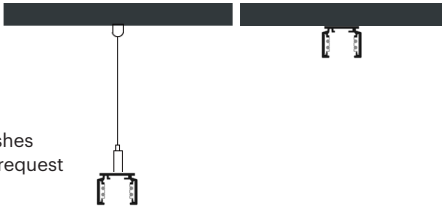











2. Accessories



Reference	Description	Finish	Detail
58.UMLCON	L Connector for ceiling	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMI	I Connector	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMFA	Flexible Connector	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMGNW	End Cover	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 




Reference	Description	Finish	Detail
58.UMGW	End Cover with side hole for wire	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMLCOU	Coupler 180° between track-track or corner-track	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMD	Pendant Kit	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMA 58.UMB	L Corner 90° Horizontal - mechanical L Corner 90° Vertical - mechanical	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 









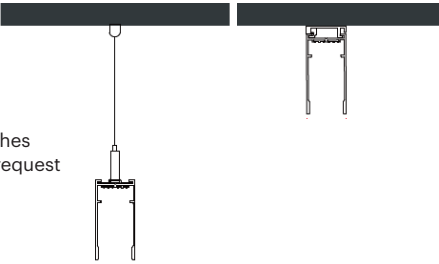

1. Profile

Reference	Description	Finish
58.UMA2M	Track 2m High Surface / Suspended	<div><div>○ 10 White</div><div>● 20 Black</div></div> <div>*Additional finishes available upon request</div>












2. Accessories




Reference	Description	Finish	Detail
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 
58.UMI	I Connector	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 
58.UMFA	Flexible Connector	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 
58.UMABGNW	End Cover	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 
58.UMABGW	End Cover with side hole for wire	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 













Reference	Description	Finish	Detail
58.UMABD	Pendant Kit	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 
58.UMBA	L Corner 90° Horizontal - mechanical	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 
58.UMABL	Coupler 180° between track-track or corner-track	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 
58.UMABM	Dust-Proof Cover 1.00 M	<div><div>○ 10 White</div><div>● 20 Black</div></div>	 

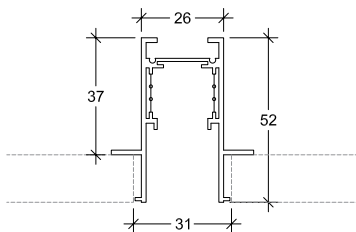1. Profile








Reference	Description	Finish
58UMBM2	Track Recessed 2.00 M	<div><div></div>10 White</div> <div><div></div>20 Black</div> <div>*Additional finishes available upon request</div>



2. Accessories


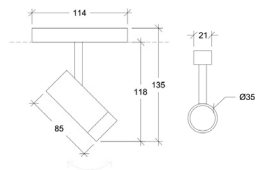

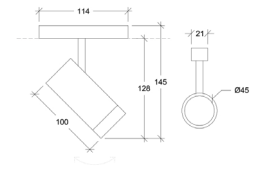

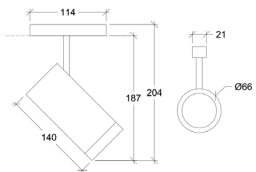
Reference	Description	Finish	Detail
58.UMF30 58.UMF30DAL 58.UMF60 58.UMF60DAL	Power Inlet Connector with Cable 30cm ON-OFF Power Inlet Connector with Cable 30cm DALI Power Inlet Connector with Cable 180cm ON-OFF Power Inlet Connector with Cable 180cm DALI	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMI	I Connector	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMFA	Flexible Connector	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMABGNW	End Cover	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMABGW	End Cover with side hole for wire	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 



Reference	Description	Finish	Detail
58.UMABD	Pendant Kit	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMBA	L Corner 90° Horizontal - mechanical	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMABL	Coupler 180° between track-track or corner-track	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 
58.UMABM	Dust-Proof Cover 1.00 M	<div><div></div>10 White</div> <div><div></div>20 Black</div>	 

58110.*.*.*.NDI/DAL


3. Light Modules

NANO PUNCTO	Number	Description	W	CCT	Beam angle	Finish	Dim
 	58110	Spotlight S 480 lm	6	27 2700K	1 15°	○ 10 White	NDI (only 2700K)
				30 3000K	2 24°	● 20 Black	DAL (only 3000K)
					3 36°		
MICRO PUNCTO	Number	Description	W	CCT	Beam angle	Finish	Dim
 	58110	Spotlight M 1010 lm	12	27 2700K	1 15°	○ 10 White	DAL
				30 3000K	2 24°	● 20 Black	
					3 36°		
PUNCTO	Number	Description	W	CCT	Beam angle	Finish	Dim
 	58110	Spotlight L 2400 lm	30	30 3000K	1 15°	○ 10 White	DAL
					2 24°	● 20 Black	
					3 36°		




3. Light Modules

PANOPTES

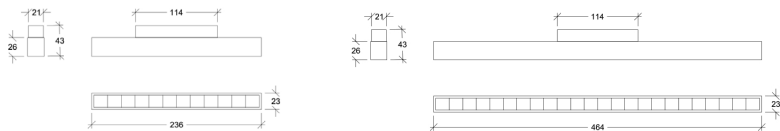


Number	Description	W	CCT	Beam angle	Finish	Dim
58120	Linearlight S 236 mm 400 lm	8	27 2700K	2 24°	○ 10 White	NDI
				3 45°	● 20 Black	
58120	Linearlight M 464 mm 1040 lm	16	30 3000K	2 24°	○ 10 White	DAL
				3 45°	● 20 Black	

CONTINUUM

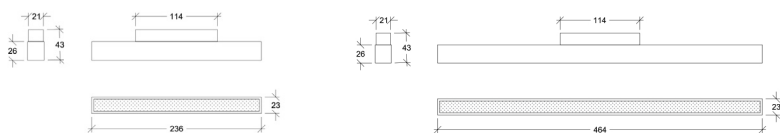

Number	Description	W	CCT	Beam angle	Finish	Dim
58120	Linear Opal S 236 mm 350 lm	8	27 2700K	4 100°	○ 10 White	NDI
					● 20 Black	
58120	Linear Opal M 464mm 850 lm	16	30 3000K	4 100°	○ 10 White	DAL
					● 20 Black	

POLYPHEMUS



















Number	Description	W	CCT	Beam angle	Finish	Dim
58130	Pendant Light 800 lm	10	30 3000K	1 15°	○ 10 White	DAL
				2 25°	● 20 Black	
				3 35°		




















PROJECT: SANDRA SOLER STUDIO





4. Accessories Summary

Detail	Reference	Description	Short	High	Rec	Finish	
	58.UMF30	Power Inlet Connector with Cable 30cm ON-OFF	x	x	x	○ 10 White ● 20 Black	
	58.UMF30DAL	Power Inlet Connector with Cable 30cm DALI	x	x	x		
	58.UMF60	Power Inlet Connector with Cable 180cm ON-OFF	x	x	x		
	58.UMF60DAL	Power Inlet Connector with Cable 180cm DALI	x	x	x		
	58.UMI	I Connector	x	x	x	○ 10 White ● 20 Black	
	58.UMFA	Flexible Connector	x	x	x	○ 10 White ● 20 Black	
	58.UMLCON	L Connector for ceiling	x	-	-	○ 10 White ● 20 Black	
	58.UMA	L Corner 90° Horizontal - mechanical	x	-	-	○ 10 White ● 20 Black	
	58.UMB	L Corner 90° Vertical - mechanical	x	-	-	○ 10 White ● 20 Black	
	58.UMAA	L Corner 90° Horizontal - mechanical	-	x	-	○ 10 White ● 20 Black	
	58.UMBA	L Corner 90° Horizontal - mechanical	-	-	x	○ 10 White ● 20 Black	

Detail	Reference	Description	Short	High	Rec	Finish	
	58.UMD	Pendant Kit	x	-	-	○ 10 White ● 20 Black	
	58.UMABD	Pendant Kit	-	x	x	○ 10 White ● 20 Black	
	58.UMLCOU	Coupler 180° between track-track or corner-track	x	-	-	○ 10 White ● 20 Black	
	58.UMABL	Coupler 180° between track-track or corner-track	-	x	x	○ 10 White ● 20 Black	
	58.UMGNW	End Cover	x	-	-	○ 10 White ● 20 Black	
	58.UMGW	End Cover with side hole for wire	x	-	-	○ 10 White ● 20 Black	
	58.UMABGNW	End Cover	-	x	x	○ 10 White ● 20 Black	
	58.UMABGW	End Cover with side hole for wire	-	x	x	○ 10 White ● 20 Black	
	58.UMABM	Dust-Proof Cover 1.00 M	-	x	x	○ 10 White ● 20 Black	


5. Drivers

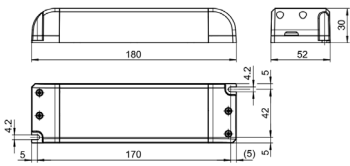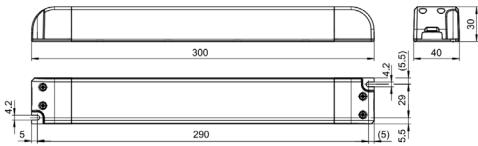Reference	Description	W	Dim
D4875	Driver 48VDC 75W VSLH 186691	75W	Non-Dimmable
			
D48120	Driver 48VDC 120W VSLH 186692	120W	Non-Dimmable
			




6. Examples


Profile 58.UM2M Short Suspended

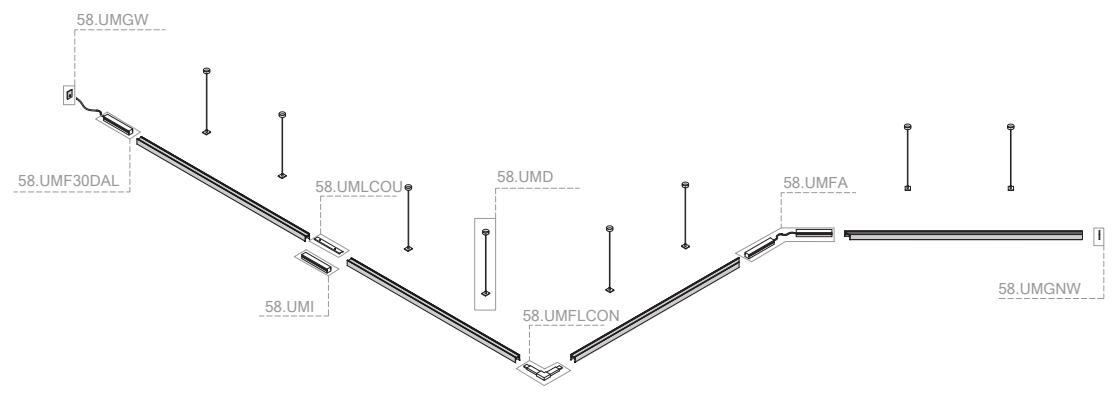

Profile 58.UMA2M High Suspended

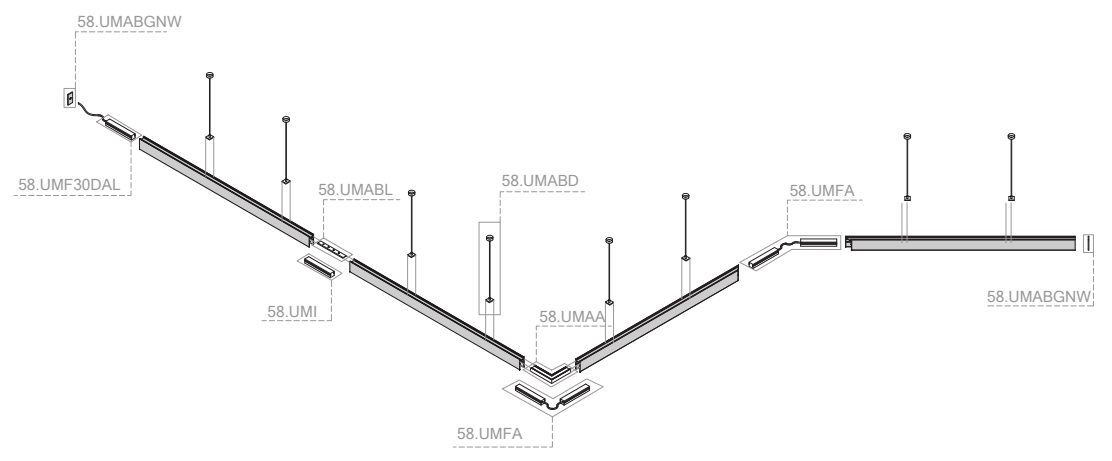

Profile 58.UM2M2 Recessed

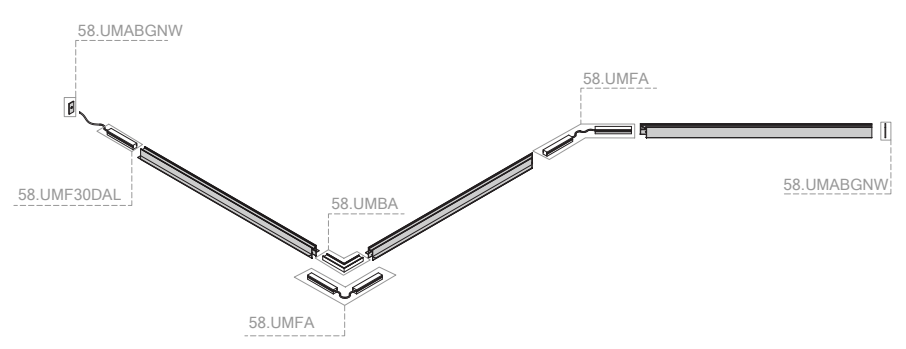


Ocultus
Recessed System
400

GOOD NIGHT
Smart System




VILAR RIBA / PROJECT: SANDRA SOLER STUDIO

Ocultus is made up of a design of hidden aluminum tucked away within the ceiling that offers useful and discrete lighting capacities. Ocultus is designed to be out of sight while incorporating projectors that illuminate from within or, if desired, they can also be visible in any type of space inside of a store, museum, houses, etc...

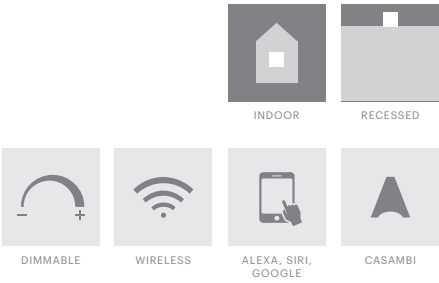

*Remote Driver. Custom configuration available upon request

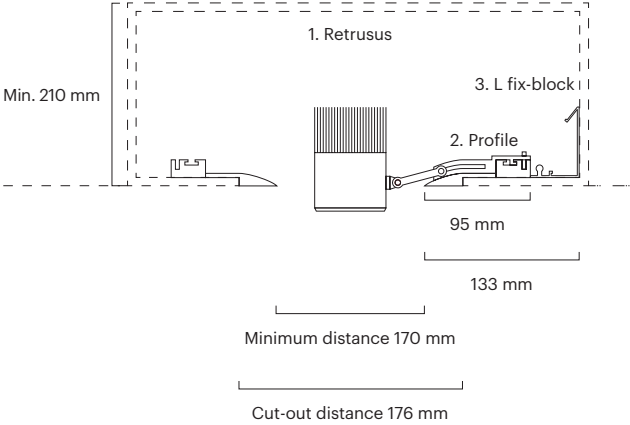


GOOD NIGHT
Recessed



Installation	Indoor
Mounting Position	Recessed
IP	20
Wattage	15W 26W
Connection	700mA
Driver	Included (remote)
Dimmable	1-10V dimming Dali dimming Non-dimmable

CRI	>85
Life Time	30.000 h

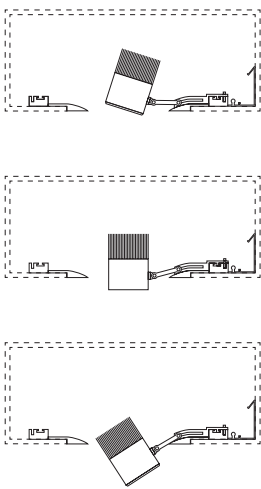




Ocultus Profile

1. Profile

Ocultus codification	Model	Finish
Ocultus profile	40001.20.M	● 20 Black
Ocultus L fix-block	40001.A.1	
90° corner cut	40002	

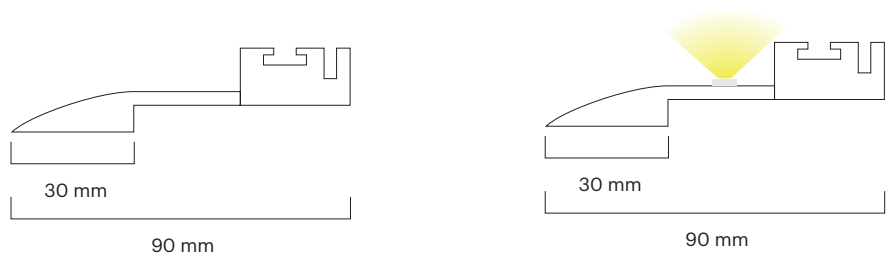

*Linear LED available upon request

Ocultus Spot

2. Retrusus

Ocultus codification	Model	W	K	Light distribution	Finish	Lumen output	Dimension
Retrusus-70	40015	15	2700	▲ 1 Narrow 15°	● 20 Black	1100	Ø65 L110
				▲ 2 Medium 24°			
				▲ 3 Wide 36°			

Ocultus codification	Model	W	K	Light distribution	Finish	Lumen output	Dimension
Retrusus-80	40026	26	3000	▲ 1 Narrow 15°	● 20 Black	2500	Ø81 L122
				▲ 2 Medium 24°			
				▲ 3 Wide 36°			

3. Driver

Driver Retrusus-70	113 x 42 x 31 mm (Remote included)
Driver Retrusus-80	103 x 65 x 31 mm (Remote included)



40001.A.1 (1 unit / 1m)

Sabrolumo
Trunking System


401

GOOD NIGHT

Smart System



Sabrolumo is a linear lighting system with endless combinations. With seamless, multilighting distribution and various bracket accessories, Sabrolumo offers a different lighting system option that allows you to illuminate anywhere you need. Up to 130 lm/W efficacy provides the lighting designer with a perfect lighting solution for many building-wide applications. With function of dimming 1-10V, DALI and emergency line, Sabrolumo is a truly intelligent lighting system.



GOOD NIGHT













Surface / Suspended





ELS GALONS / PROJECT: SANDRA SOLER STUDIO / PHOTO: JORDI PUIG PX77



1. Module

Sabrolumo codification	Model	Lenght mm	W	K	Light distribution	Dimm
Lens 75w 3000K 30°	44157	1437	25 - 75	30	 2	D10
Lens 75w 3000K 60°	44157	1437	25 - 75	30	 3	D10
Lens 75w 3000K 90°	44157	1437	25 - 75	30	 4	D10
Lens 75w 3000K Asy Left	44157	1437	25 - 75	30	 5L	D10
Lens 75w 3000K Asy Right	44157	1437	25 - 75	30	 5R	D10
Lens 75w 3000K Asy Doble	44157	1437	25 - 75	30	 5D	D10
Lens 75w 4000K 30°	44157	1437	25 - 75	40	 2	D10
Lens 75w 4000K 60°	44157	1437	25 - 75	40	 3	D10
Lens 75w 4000K 90°	44157	1437	25 - 75	40	 4	D10
Lens 75w 4000K Asy Left	44157	1437	25 - 75	40	 5L	D10
Lens 75w 4000K Asy Right	44157	1437	25 - 75	40	 5R	D10
Lens 75w 4000K Asy Doble	44157	1437	25 - 75	40	 5D	D10
Blank cover 1200mm	44927	1150				
Blank cover 1500mm	44957	1437				
Spotlight module	44980	1437 (track lenght: 650mm)				

Lumen output 160lm/W

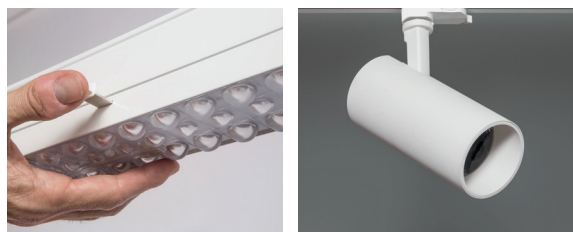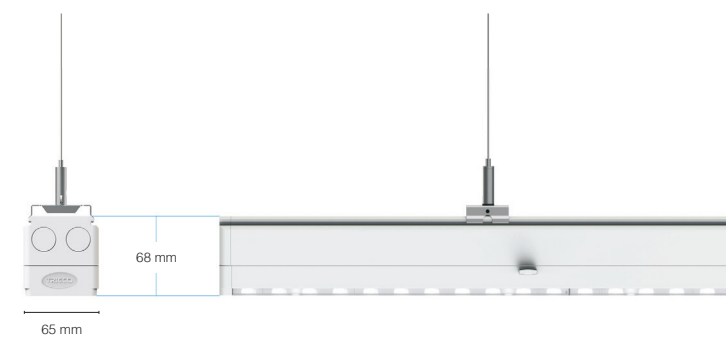

*PIR and daylight sensor available upon request
Emergency battery available upon request

2. Trunk




3. Electrical Feeding

Sabrolumo codification	Model
Electrical module 1437mm	44012
Electrical module 2874mm	44015

Sabrolumo codification	Model
Connection Wires 7x2,5mm ²	44901
Terminal feed with box 7x2,5mm ²	44911

4. Fixing

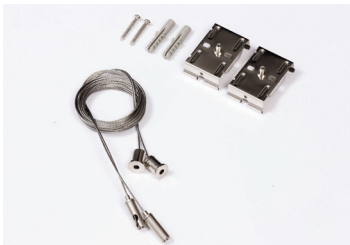

Sabrolumo codification	Model
Surface ceiling kit	44902
Steel Cable suspended Kit	44903
Chain suspended Kit	44904

5. Nodes & Endcaps




Sabrolumo codification	Model
"L" - L connection	44906
"T" - T connection	44907
"+" - X connection	44908
Endcaps 005	44920
Endcapbox 005s	44921

*Custom configuration available upon request

High Output Profiles



Momentum Surface
Page 32




Versatile Surface
Page 68




Momentum Recessed
Page 42




Cubus - 2 Surface
Page 46




Cubus Recessed
Page 56



Omnia
Page 60




Mitis
Page 64



Compact Profiles


Abscondere
Page 74



Magneticus
Page 88



Macreo Recessed
Page 96




Totus
Page 106



Refundus-p
Page 116




Big Refundus
Page 122




Minus-2 Recessed
Page 132




Aresta
Page 80




Supellex
Page 90



Murus
Page 98



Trahea
Page 110



Refundus-i
Page 118



Elis
Page 124



Big Minimus
Page 136




Opticus-2
Page 82



Macreo Surface
Page 94



Flexibilis
Page 102



Angulus
Page 114



Refundus-e
Page 120




Minus-2 Surface
Page 128






A luminaire designed for flexibility, Momentum offers both suspended and surface-mounted configurations, catering to diverse lighting needs. Choose between opal diffuse lighting for a soft ambient glow or UGR<19 optics for precise glare reduction. With its sleek profile and modern design, Momentum seamlessly integrates into any interior, enhancing the aesthetic appeal of the space. Ideal for commercial, hospitality, or residential settings, it sets the standard for versatile lighting solutions.

Up/Down Light



Surface / Suspended / Wall



1. Profile


a. Profile + UGR Light <19

Reference	Wattage	Description	CCT	Light Distribution	Louvre Colour	Finish	Dim	Size
457.UGR	14 14W/m	LED 200mA 2600 lm/m	27 2700K	2 Medium 60°	W White	○ 10 White	NDI On/Off	M Linear meter
	24 24W/m	LED 350mA 4600 lm/m	30 3000K	3 Wide 90°	B Black	● 20 Black	DAL Dali	
			40 4000K			● 30 Aluminium	PDI Push Dimm	

*Additional finishes available upon request




Wide 90°




UGR ≤ 19 for 2600lm/m

Medium 60°



UGR ≤ 19



Louvre Colour





b. Profile + Direct Light Opal

Reference	Wattage	Description	CCT	Light Distribution	Finish	Dim	Size
457.OPD	14 14W/m	LED 350mA 2600 lm/m	27 2700K	6 Opal 120°	○ 10 White	NDI On/Off	M Linear meter
	21 21W/m	LED 500mA 3500 lm/m	30 3000K		● 20 Black	DAL Dali	
			40 4000K		● 30 Aluminium	PDI Push Dimm	




*Additional finishes available upon request



Opal Down 120°




c. Profile + Track 3-Phase

Reference	Position	Finish	Dim	Size
457.TRA	D Down	 10 White	NDI On/Off	M Linear meter
		 20 Black	DAL DALI	
		 30 Aluminium		
		*Additional finishes available upon request		






2. Cover Indirect Light Opal

Reference	Lumen	Description	CCT	Dim	Size
457.OPI	1000	14,4W/m LED 24V 120 Leds/m	27 2700K	NDI On/Off	M Linear meter
	2000	19,2W/m LED 24V 240 Leds/m	30 3000K	DAL Dali	
	3000	24W/m HE LED 24V 128 Leds/m (only 3000K)	40 4000K	PDI Push Dimm	
*Driver Incorporated					



Ledstrip UP Opal 120°

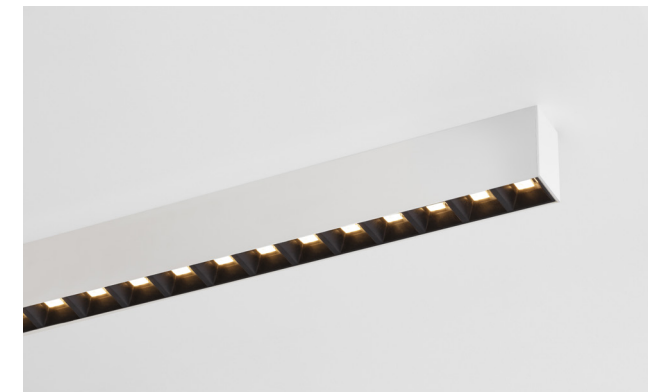

Momentum Surface

457

GOOD NIGHT

High Output Profiles

3. Endcap

Reference	Description	Finish
457.11	Endcap with screws (2 units)	○ 10 White
457.12	Endcap without screws (2 units)	● 20 Black
		● 30 Aluminium

4. Fixations & Connections

Reference	Description
457.21	Momentum & Cubus-2 surface clip for ceiling (1 unit / 1m)
457.22	Momentum & Cubus-2 suspension kit (1 unit / 1m & cable 2m)
457.24	Momentum & Cubus-2 surface clip for wall (1 unit / 1m)
457.31	Momentum linear connection (if length > 3m)
457.32	Momentum connection 90°
457.33.XXX	Momentum custom connection XXX



PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCE GOST PHOTO

GOOD NIGHT

Surface / Wall / Suspended

5. Power feed & Electrification

Surface

Reference	Description
457.41	Momentum & Cubus-2 power feed for surface mounting

Suspension

Reference	Description	Finish	Dim
457.42	Momentum power feed kit and electrification for suspension (cable 2m)	○ 10 White	NDI On/Off
		● 20 Black	DAL Dali
		● 30 Aluminium	PDI Push Dimm





PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA



PIMEC / PROJECT: PARIS CAMPS / PHOTO: PARIS CAMPS



PIMEC / PROJECT: PARIS CAMPS / PHOTO: PARIS CAMPS



PIMEC / PROJECT: PARIS CAMPS / PHOTO: PARIS CAMPS



OFFICE BUILDING BARCELONA / PROJECT: PARIS CAMPS / PHOTO: JORGE DE JORGE

Momentum Recessed



458

GOOD NIGHT

High Output Profiles



A luminaire designed for flexibility, Momentum offers both suspended and surface-mounted configurations, catering to diverse lighting needs. Choose between opal diffuse lighting for a soft ambient glow or UGR<19 optics for precise glare reduction. With its sleek profile and modern design, Momentum seamlessly integrates into any interior, enhancing the aesthetic appeal of the space. Ideal for commercial, hospitality, or residential settings, it sets the standard for versatile lighting solutions.

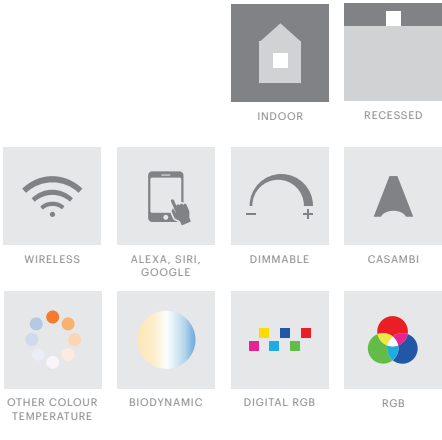

GOOD NIGHT

Recessed

1. Profile


a. Profile + UGR Light <19

Reference	Wattage	Description	CCT	Light Distribution	Louvre Colour	Finish	Dim	Size
458.UGR	14 14W/m	LED 200mA 2600 lm/m	27 2700K	2 Medium 60°	W White	○ 10 White	NDI On/Off	M Linear meter
	24 24W/m	LED 350mA 4600 lm/m	30 3000K	3 Wide 90°	B Black	● 20 Black	DAL Dali	
			40 4000K			● 30 Aluminium	PDI Push Dimm	

*Additional finishes
available upon request




Wide 90°




UGR ≤ 19 for 2600lm/m

Medium 60°



UGR ≤ 19



Louvre Colour





b. Profile + Direct Light Opal

Reference	Wattage	Description	CCT	Light Distribution	Finish	Dim	Size
458.OPD	14 14W/m	LED 350mA 2600 lm/m	27 2700K	6 Opal 120°	○ 10 White	NDI On/Off	M Linear meter
	21 21W/m	LED 500mA 3500 lm/m	30 3000K		● 20 Black	DAL Dali	
			40 4000K		● 30 Aluminium	PDI Push Dimm	

*Additional finishes
available upon request



Opal Down 120°



2. Endcap

Reference	Description	Finish
458.11	Endcap (2 units)	<div><div></div> 10 White</div> <div><div></div> 20 Black</div> <div><div></div> 30 Aluminium</div>

3. Fixations & Connections

Reference	Description
458.08	Momentum recessed bracket (1 unit / 1,5m)




MAGIC BOX




PROJECT: OCTAVIO MESTRE




This fixture boasts the capability to emit light both upwards and downwards, providing a versatile lighting solution adaptable to various environments and applications. Works very well both with low and high power. It is highly resistant, and its design ends up being almost invisible, but when it is visible (either when surface mounted or when suspended), it almost goes unnoticed because of its small size.



Flat difusser



Recessed difusser

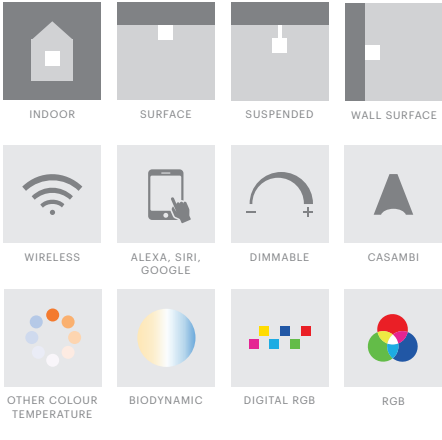

1. Profile


a. Profile + UGR Light <19

Reference	Wattage	Description	CCT	Light Distribution	Louvre Colour	Finish	Dim	Size
465.UGR	14 14W/m	LED 200mA 2600 lm/m	27 2700K	2 Medium 60°	W White	○ 10 White	XXX Driver not included (See Driver Section)	M Linear meter
	24 24W/m	LED 350mA 4600 lm/m	30 3000K	3 Wide 90°	B Black	● 20 Black		
			40 4000K			● 30 Aluminium		

*Additional finishes
available upon request




Wide 90°




UGR ≤ 19 for 2600lm/m

Medium 60°



UGR ≤ 19



Louvre Colour





b. Profile + Direct Light Opal

Reference	Led	Light Distribution	Finish	Dim	Size
465.OPD	LedStrip not included (see LedStrip section)	6 Opal 120°	○ 10 White ● 20 Black ● 30 Aluminium	XXX Driver not included (See Driver Section)	M Linear meter




*Additional finishes
available upon request



Opal Down 120°



c. Profile + Direct Light Microprismàtic

Reference	Led	Light Distribution	Finish	Dim	Size
465.MPD	LedStrip not included (see LedStrip section)	6 Microprismàtic	 10 White	XXX Driver not included (See Driver Section)	M Linear meter
			 20 Black		
			 30 Aluminium		
			*Additional finishes available upon request		

2. Cover Indirect Light Opal

Reference	Lumen	Description	CCT	Dim	Size
465.OPI	1000	14,4W/m LED 24V 120 Leds/m	27 2700K	XXX Driver not included (See Driver Section)	M Linear meter
	2000	19,2W/m LED 24V 240 Leds/m	30 3000K		
	3000	24W/m HE LED 24V 128 Leds/m (only 3000K)	40 4000K		

3. Endcap

Reference	Description	Finish
465.11	Cubus-2 endcap (2 units)	○ 10 White
		● 20 Black
		● 30 Aluminium

4.Fixations & Connections

Reference	Description
457.21	Cubus-2 & Momentum surface clip for ceiling (1 unit /1m)
457.22	Cubus-2 & Momentum suspension kit (1 unit / 1m & cable 2m)
457.24	Cubus-2 & Momentum surface clip for wall (1 unit / 1m)
465.31	Cubus-2 linear connection (if length > 3m)
465.32	Cubus-2 connection 90°
465.33.XXX	Cubus-2 custom connection XXX




PROJECT: POLIESTETIC BY PVC, EL VENDRELL





OFFICES IN BARCELONA / PROJECT: PARIS CAMPS / PHOTO: JORGE DE JORGE

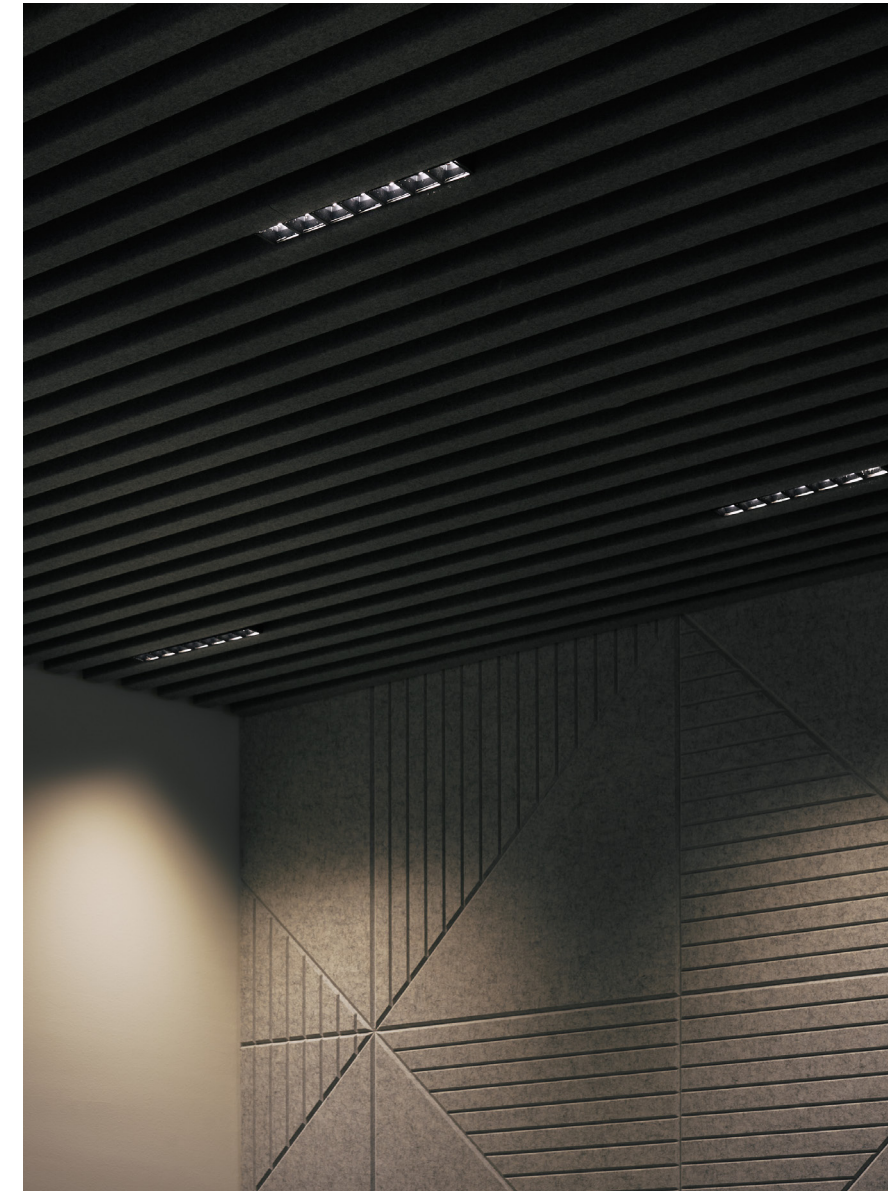

OFFICES IN BARCELONA / PROJECT: BATLLE I ROIG / PHOTO: JORGE DE JORGE

5. Mounting Kits


Surface

Reference	Description
457.41	Cubus-2 & Momentum power feed for surface mounting


Suspension

Reference	Description	Finish
465.42	Cubus-2 power feed kit and electrification for suspension (cable 2m)	<div><div>○ 10 White</div><div>● 20 Black</div><div>● 30 Aluminium</div></div>

Up/Down Light





Upon request

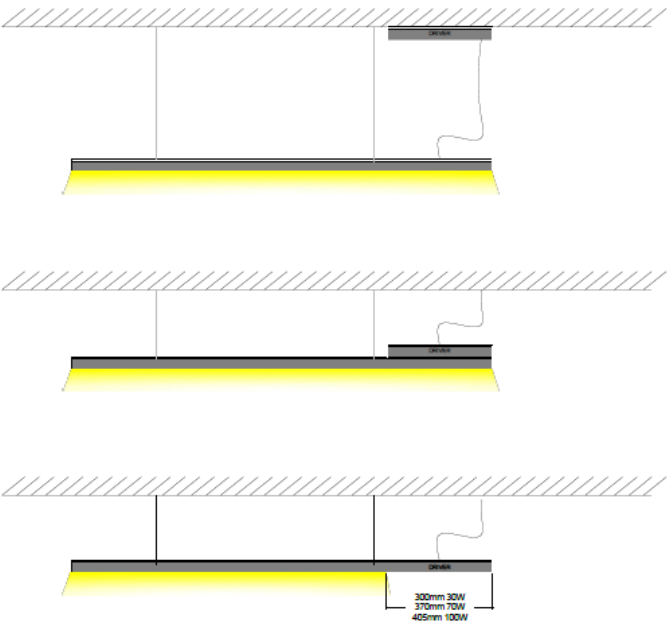


* For those who prefer simplicity or have specific installation requirements, the CUBUS-2 is also available with a built-in driver, with several mounting options


Surface / Suspended / Wall

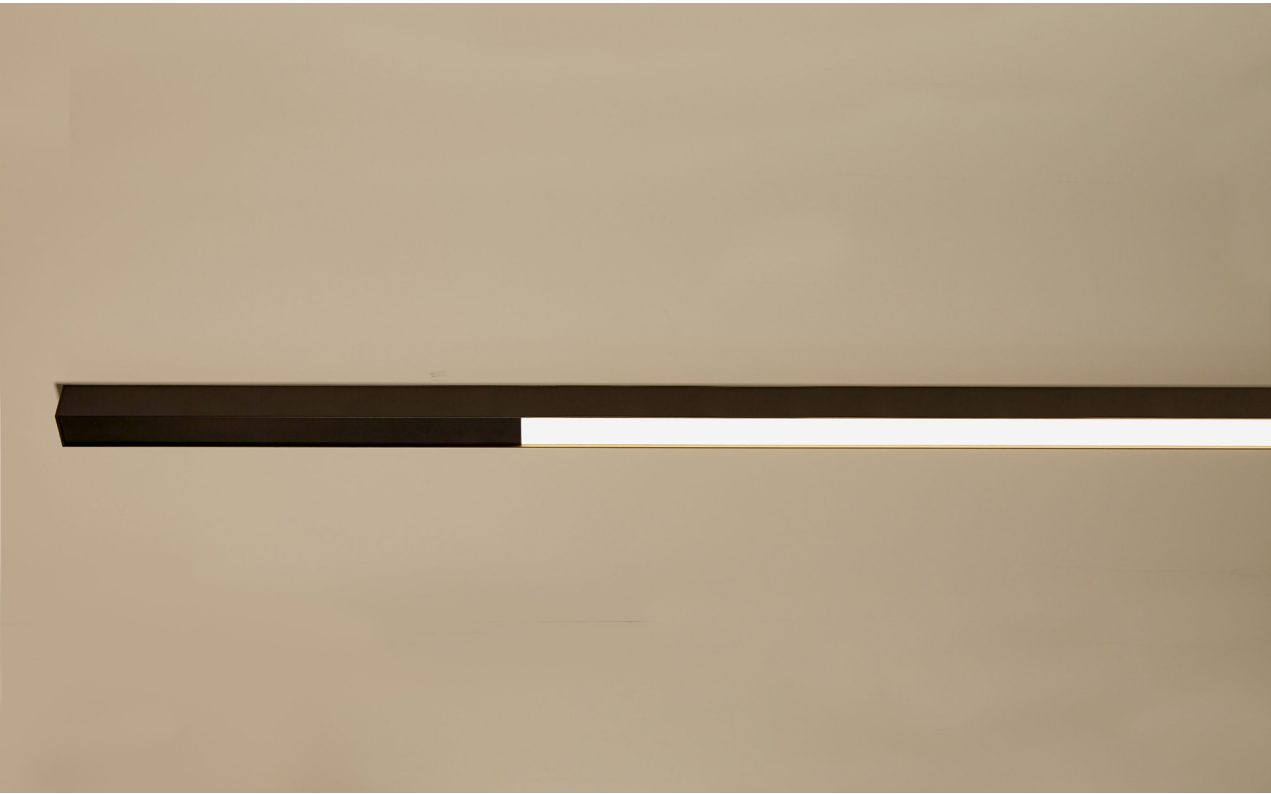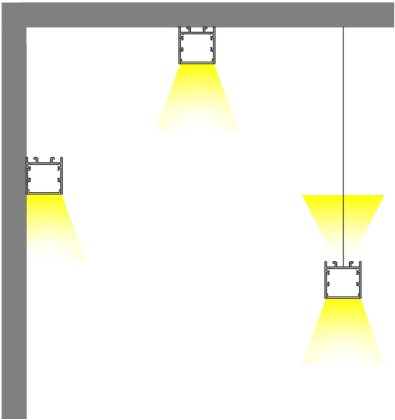

Our customizable Cubus-2 offer the option to have the driver remote or built into the fixture itself. You can choose to have it situated at one end, which leaves a portion of the diffuser non-illuminating, or mounted on the profile, or within a special canopy. These tailored configurations are available upon request to suit your specific design needs.



Flat difusser




Recessed difusser





MARTA'S LEMON PIE / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS

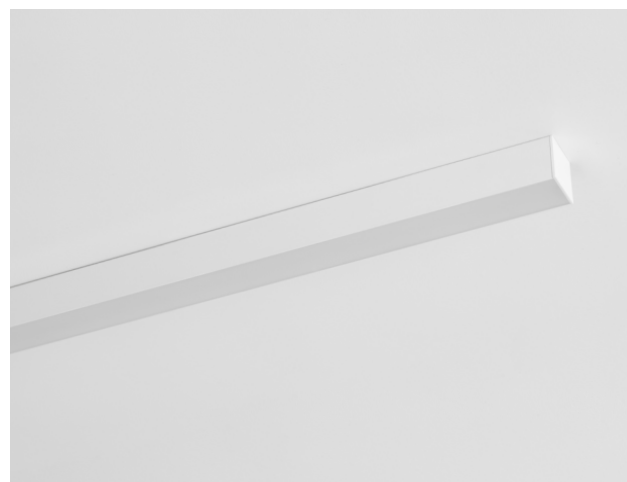



PROJECT: FERRUZ DECORADORS



PRATS INTERNATIONAL BRANDS / PROJECT: VOLDOS ARCHITECTURE & DESIGN STATION



Arefined lighting solution that seamlessly integrates into your space with recessed mounting. Similar to its surface-mounted counterpart, Cubus Recessed ensures a discreet presence that blends harmoniously into its surroundings. Whether used with low or high power, Cubus Recessed delivers exceptional performance while maintaining its unobtrusive profile.

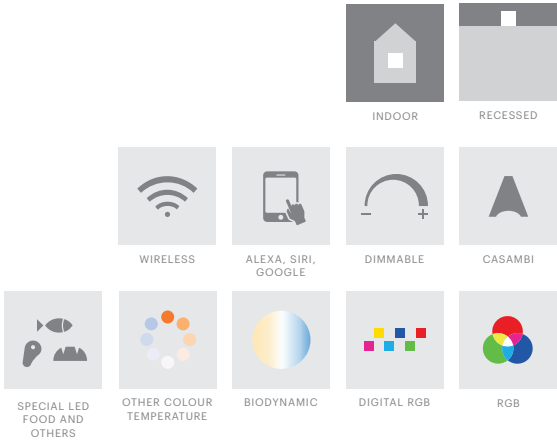

1. Profile


a. Profile + UGR Light <19

Reference	Wattage	Description	CCT	Light Distribution	Louvre Colour	Finish	Dim	Size
464.UGR	M14	14W/m LED 200mA 2600 lm/m	27 2700K	2 Medium 60°	W White	○ 10 White	XXX Driver not included (See Driver Section)	M Linear meter
	M24	24W/m LED 350mA 4600 lm/m	30 3000K	3 Wide 90°	B Black	● 20 Black		
			40 4000K			● 30 Aluminium		

*Additional finishes available upon request




Wide 90°




UGR ≤ 19 for 2600lm/m

Medium 60°



UGR ≤ 19



Louvre Colour





b. Profile + Direct Light Opal

Reference	Led	Light Distribution	Finish	Dim	Size
464.OPD	LedStrip not included (see LedStrip section)	6 Opal 120°	○ 10 White	XXX Driver not included (See Driver Section)	M Linear meter
			● 20 Black		
			● 30 Aluminium		

*Additional finishes available upon request



Opal Down 120°



Cubus Recessed

464




GOOD NIGHT

High Output Profiles

GOOD NIGHT

Recessed

c. Profile + Direct Light Microprismàtic

Reference	Led	Light Distribution	Finish	Dim	Size
464.MPD	LedStrip not included (see LedStrip section)	6 Microprismàtic	 10 White	XXX Driver not included (See Driver Section)	M Linear meter
			 20 Black		
			 30 Aluminium		
			*Additional finishes available upon request		

2. Endcap

Reference	Description	Finish
464.11	Cubus-2 Recessed endcap (2 units)	○ 10 White
		● 20 Black
		● 30 Aluminium

3. Fixations & Connections

Reference	Description
464.08	Cubus-2 Recessed bracket (1 unit / 1,5m)



OFFICES BUILDING IN BARCELONA / PROJECT: BATLLE I ROIG / PHOTO: JORGE DE JORGE




OFFICES IN BARCELONA / PROJECT: BATLLE I ROIG / PHOTO: JORGE DE JORGE



The OMNIA luminaire redefines contemporary lighting solutions, combining elegance with versatility. This suspended luminaire offers both upward and downward lighting, ensuring comprehensive illumination of any space. The upward light creates a serene ambiance by gently illuminating ceilings, while the downward light ensures effective task lighting, making it perfect for offices, galleries, or modern home settings.

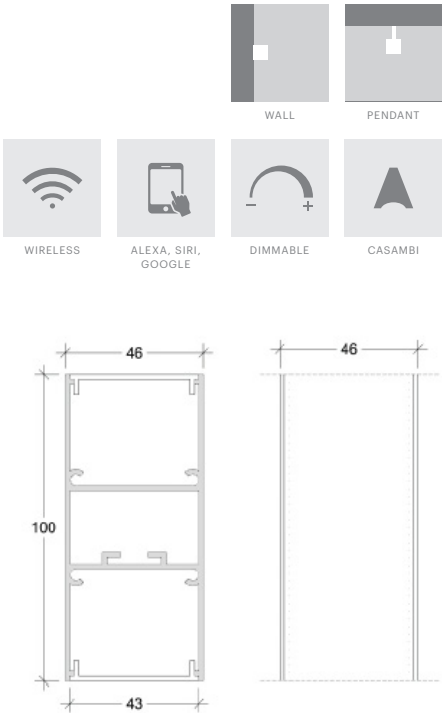


The Omnia Linear Luminaire is more than just a light fixture; it's a statement piece that blends functionality with style, offering customizable lighting solutions for any modern space.



1. Key Features

- Dual Direction Lighting**
Provides both upward and downward illumination for a balanced light distribution.
- Customizable Optics**
Choose from Opal and UGR (Unified Glare Rating) lenses to tailor the light diffusion and glare reduction to your specific needs.
- Built-in Track System**
A unique addition is the integrated track within the luminaire. This feature allows for the connection of multiple spotlights, offering directed and focused lighting perfect for highlighting artworks, products in retail settings, or accenting specific areas in a room.
- Suspended Design**
The sleek, linear form factor, suspended elegantly, adds a touch of modernity to any interior. Its discrete cabling and mounting system ensure a clean and minimal aesthetic.
- Versatile Application**
Ideal for a variety of environments, from professional settings like conference rooms and lobbies to personal spaces such as dining areas and home studios.

2. Profile

Reference	Description	Mounting	Finish	Size
470.00	Omnia Profile	Suspended	 10 White	M Linear meter
			 20 Black	
			 30 Aluminium	
			*Additional finishes available upon request	

3. Endcap

Reference	Description	Finish
470.11	Omnia endcap (2 units)	○ 10 White
		● 20 Black
		● 30 Aluminium

4. Power feed

Surface

Reference	Description
470.41	Omnia power feed kit and electrification for surface mounting

Suspension

Reference	Description	Finish	Dim
470.42	Omnia power feed kit and electrification for suspension	<div></div> 10 White	NDI On/Off
		<div></div> 20 Black	DAL Dali
		<div></div> 30 Aluminium	PDI Push Dimm

5. Fixations & Connections



Reference	Description
470.22	Omnia suspension kit (1 unit/1,5m)
470.24	Omnia surface clip for wall
470.31	Omnia linear connection (if length>2,5m)
470.32	Omnia connection 90°





Wall Opal Down / Opal Up

6. LED & Driver

Reference	Wattage	Description	CCT	Light Distribución	Grid Colour	Dim
470	M14 14W/m	LED 200mA 2600 lm/m	27 2700K	2 Medium 60°	W White Grid	NDI On/Off
	M24 24W/m	LED 350mA 4600 lm/m	30 3000K	3 Wide 90°	B Black grid	DAL Dali
			40 4000K			PDI Push Dimm

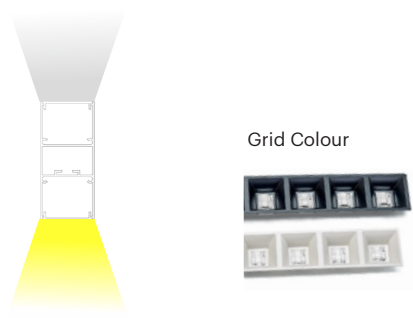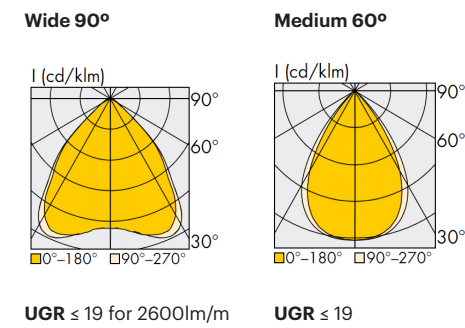




Reference	Direction	Wattage	Description	CCT	Light Distribución	Dim
470	D Down	M14 14W/m	LED 350mA 2600 lm/m	27 2700K	6 Opal 120°	NDI On/Off
	U Up	M21 21W/m	LED 500mA 3500 lm/m	30 3000K		DAL Dali
				40 4000K		PDI Push Dimm

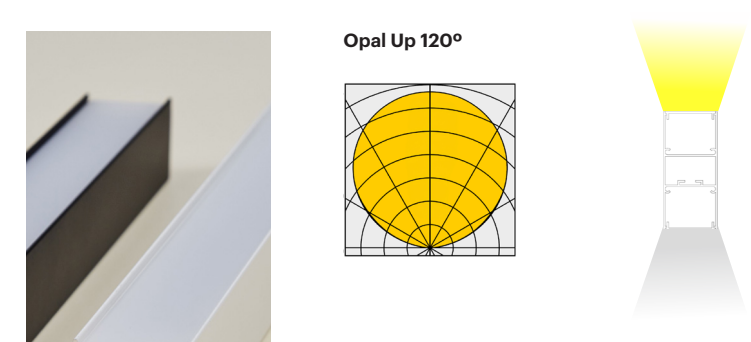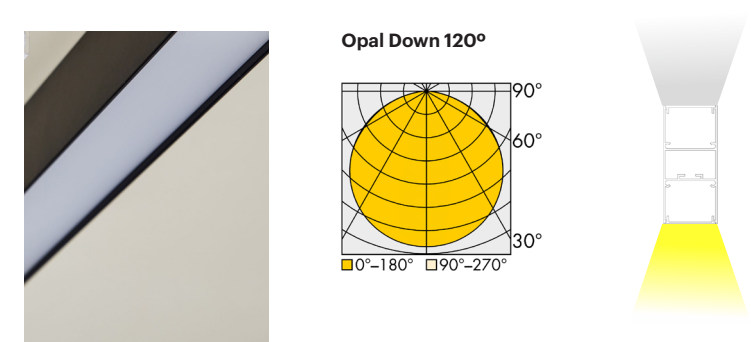

7. Track

Reference	Position	Description	Finish	Dim
470	D Down	TRA Track	<div></div> 10 White	NDI On/Off
	U Up		<div></div> 20 Black	DAL Dali
			<div></div> 30 Aluminium	

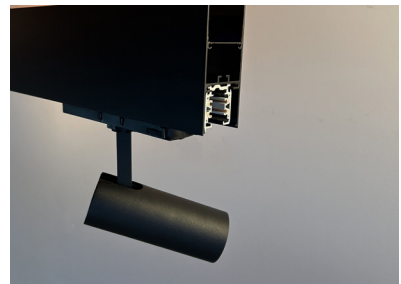

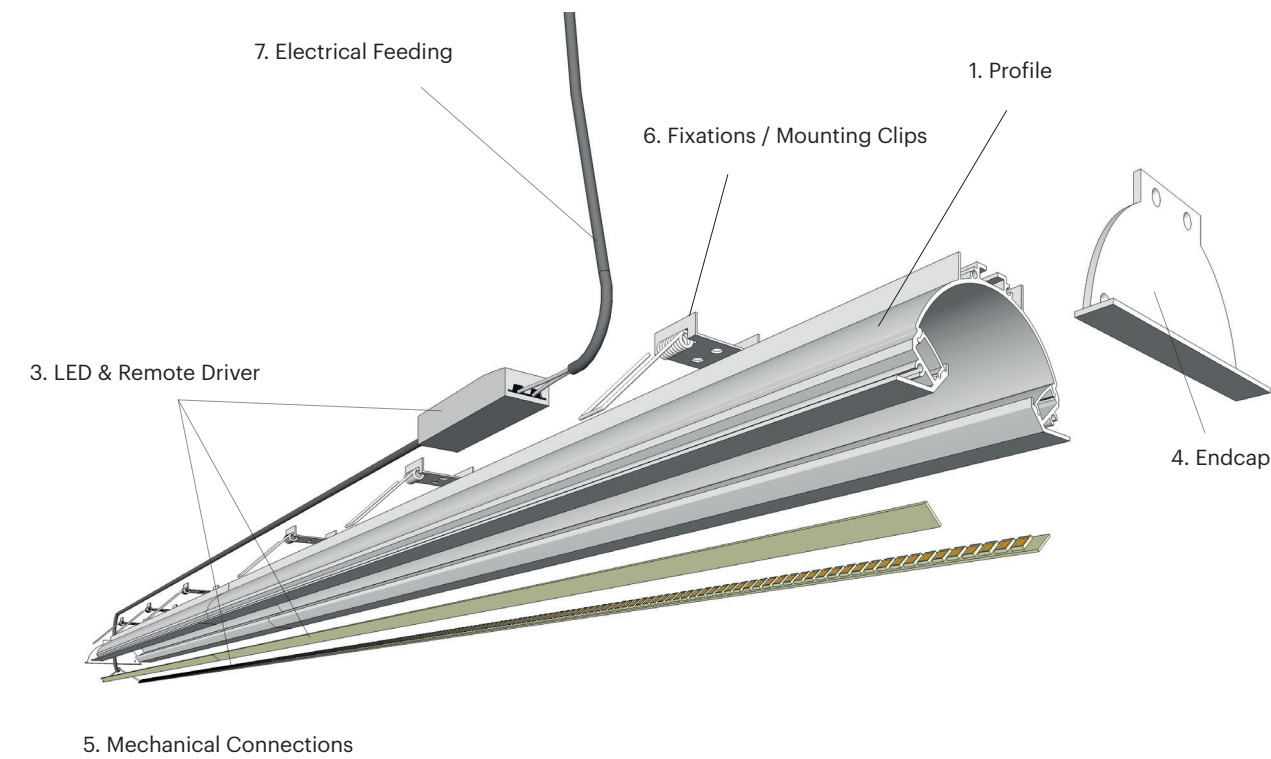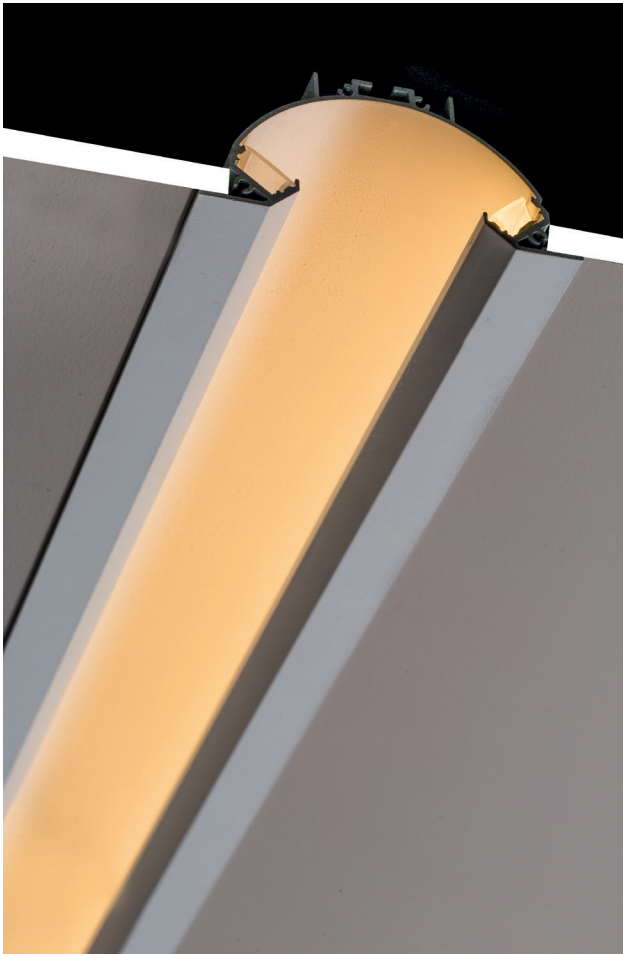

Mitis is a recessed system that achieves the softness and the visual comfort that we are rarely able to get with the usual models in the market. Its soft light, which can be warm or cool depending on our mood, gives us high quality light and at the same time, aesthetics that allow us to play around with interior design. With its different power settings plus its double light system, we can achieve effects that are both highly visual and able to give us the peace-and-quiet feeling that we so often look for.

INDOOR

RECESSED

WIRELESS

ALEXA, SIRI, GOOGLE

DIMMABLE




CASAMBI

OTHER COLOUR TEMPERATURE

BIODYNAMIC


DIGITAL RGB

RGB

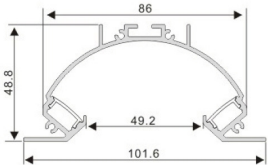Dimensions	Cut-out Size	Finish	Mounting
 	w90xh70mm	<div><div>10 White</div><div>30 Aluminium</div></div>	 <div>RECESSED</div>

1. Profile

Reference	Description	Mounting	Finish	Size
451.00	Mitis profile with difussers	Recessed	<div><div></div>10 White</div> <div><div></div>30 Aluminium</div>	M Linear meter



*Additional finishes
available upon request

2. LED Strip

See LedStrip Section

It is necessary to include two LED Strip. For example, 2m profile requires 4m of LED Strip



3. Endcap

Reference	Description	Finish
451.11	Endcap (2 units)	<div><div></div>10 White</div> <div><div></div>30 Aluminium</div>



4. Mechanical Connections

Reference	Description
451.31	180° linear connection (when longer than 2'5m)
451.32	90° connection
451.33.XXX	Custom connection

5. Fixations / Mounting Kits

Reference	Description
451.23	Recessed bracket (1 unit / 1'5m)





6. Electrical Feeding & Internal Electrification


Reference	Description
451.43	Electrification for recessed mounting

7. Driver

See Driver Section

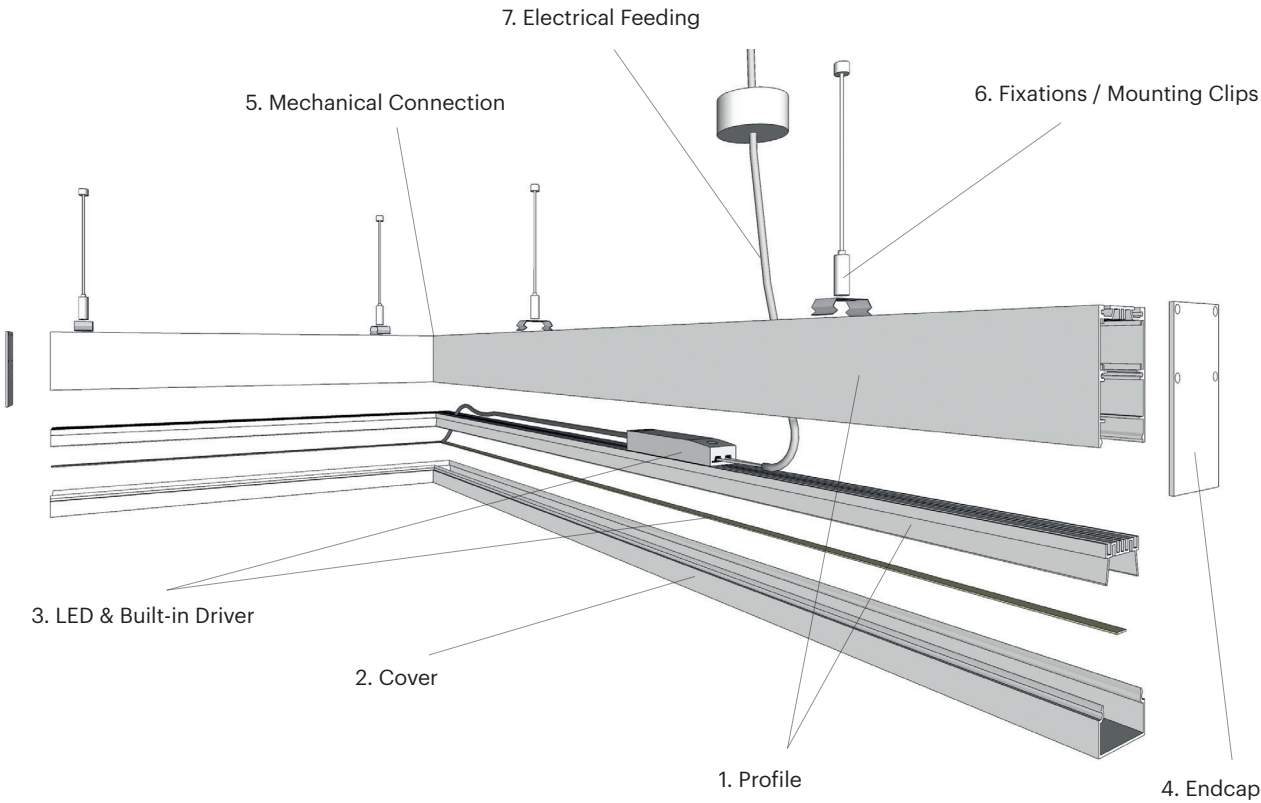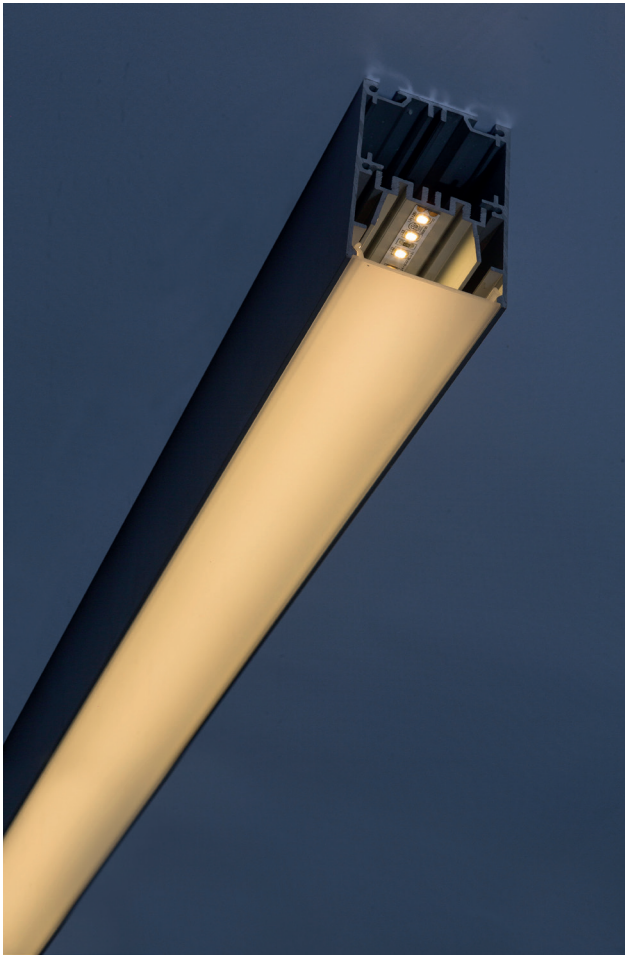

VERSATILE Surface and Recessed, with the FLAT and OUT diffuser, consists of 2 interchangeable models and diffusers for just one versatile concept, as its name indicates. Either recessed (R), surface mounted or suspended (S), with the same design and with only the variation of a tiny frame for the recessed one, they all equally adapt to 2 diffusers that achieve very different looks, that can be both discrete (FLAT) or much more visual (OUT). The VERSATILE system achieves functionality and at the same time is practical, easy to install, and can be part of many day-to-day projects.

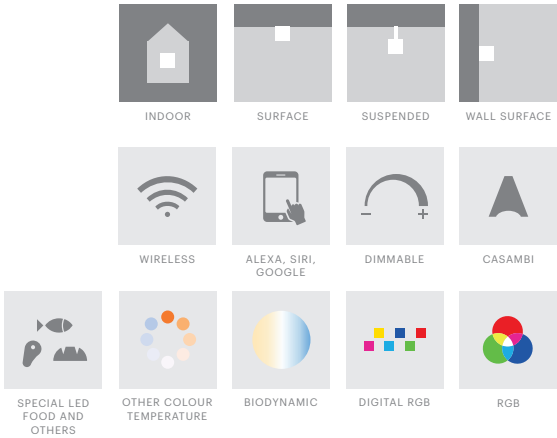

Dimensions		Finish	Mounting
		<ul style="list-style-type: none">○ 10 White● 20 Black● 30 Aluminium	 SURFACE
			 SUSPENDED
		<ul style="list-style-type: none">○ 10 White● 20 Black● 30 Aluminium	 WALL SURFACE
			 SURFACE
			 SUSPENDED
			 WALL SURFACE

Versatile Surface

453

GOOD NIGHT

High Output Profiles






Versatile-s Flat






Versatile-s Out



1. Profile



Reference	Description	Mounting	Finish	Size
453.00	Versatile-s	Surface / Suspended	 10 White	M Linear meter
			 20 Black	
			 30 Aluminium	
			*Additional finishes available upon request	





2. Cover

Reference	Description
453.01.01.M	Flat opal diffuser
453.02.01.M	Out opal diffuser






GOOD NIGHT

Surface / Wall / Suspended

3. LED & Driver


Reference	Wattage	Description	CCT	Light Distribución	Dim
453	M14 14W/m	LED 350mA 2600 lm/m	27 2700K	6 Opal 120°	NDI On/Off
	M21 21W/m	LED 500mA 3500 lm/m	30 3000K		DAL Dali
			40 4000K		PDI Push Dimm



IMMOBILIARIA MGO / PROJECT: SANDRA SOLER STUDIO

4. Endcap

Reference	Description	Type	Finish
453.11	Endcap (2 units)	Flat difusser	○ 10 White
453.12	Endcap (2 units)	Out difusser	● 20 Black
			● 30 Aluminium



5. Mechanical Connections

Reference	Description
453.31	180° linear connection (when longer than 2'5m)
453.32	90° connection
453.33.XXX	Custom connection

6. Fixations / Mounting Kits

Reference	Description
453.21	Surface clip (1 unit / 1'5m)
453.22	Suspended kit (1 unit / 1,5m) (length 2m)
453.25	Wall bracket (1 unit / 1'5m)



7. Electrical feeding & Internal Electrification


Reference	Description	Finish
453.42	Electrification for suspended mounting	○ 10 White
		● 20 Black
		● 30 Aluminium
453.41	Electrification for surface mounting	



CLÍNICA DENTAL PONS / PROJECT: ESTUDI D'ARQUITECTURA INTERIOR MAITE PRATS



Its name *conceals* its body. The Abscondere is the profile that you'll never see. It allows for a beautiful indirect light, soft and warm, a backing light with a design that will enable you to finish up the ceiling in a smooth, elegant, and almost invisible way. This gives the project a quality flair, rather like a luxury item. ABSCONDERE dignifies and adds up to your construction quality. Its NON-presence is its best quality; which is equivalent to say that its quality doesn't go unnoticed.

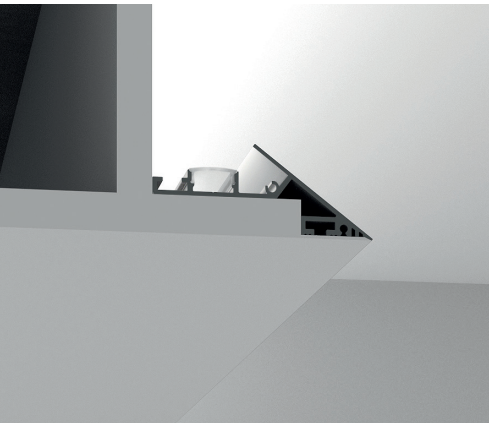

INDOOR

RECESSED

WIRELESS

ALEXA, SIRI,
GOOGLE

DIMMABLE

CASAMBI

OTHER COLOUR
TEMPERATURE

BIODYNAMIC

DIGITAL RGB

RGB

49 mm
73 mm
30.2 mm



PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: FRAGMENTS DE MARC TORRA

1. Profile

Reference	Description	Mounting	Finish	Size
424.00	Abscondere profile with difusser	Recessed	○ 10 White	M Linear meter

*Additional finishes available upon request

For 13 mm plasterboard

2. Endcap

Reference	Description
424.11	Endcap (2 units)



3. Mechanical Connection


Reference	Description
424.32	90° L connector
424.33	90° S connector

4. LED Strip


See LedStrip Section

5. Driver

See Driver Section

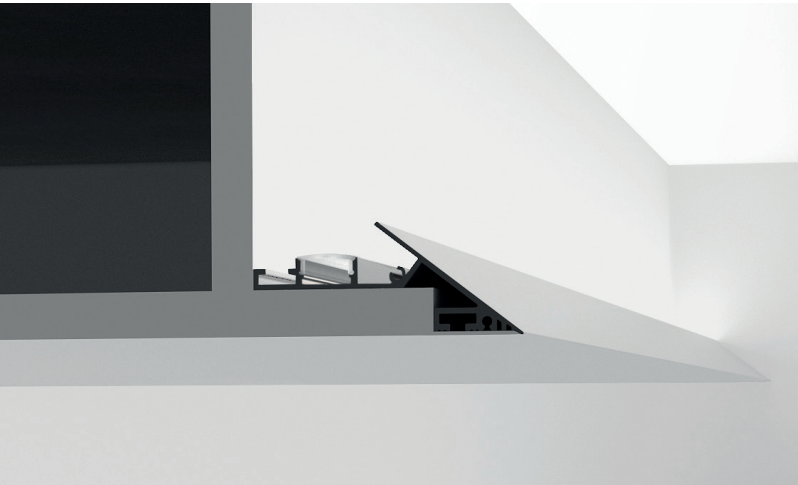

PROJECT: OCTAVIO MESTRE ARCHITECT

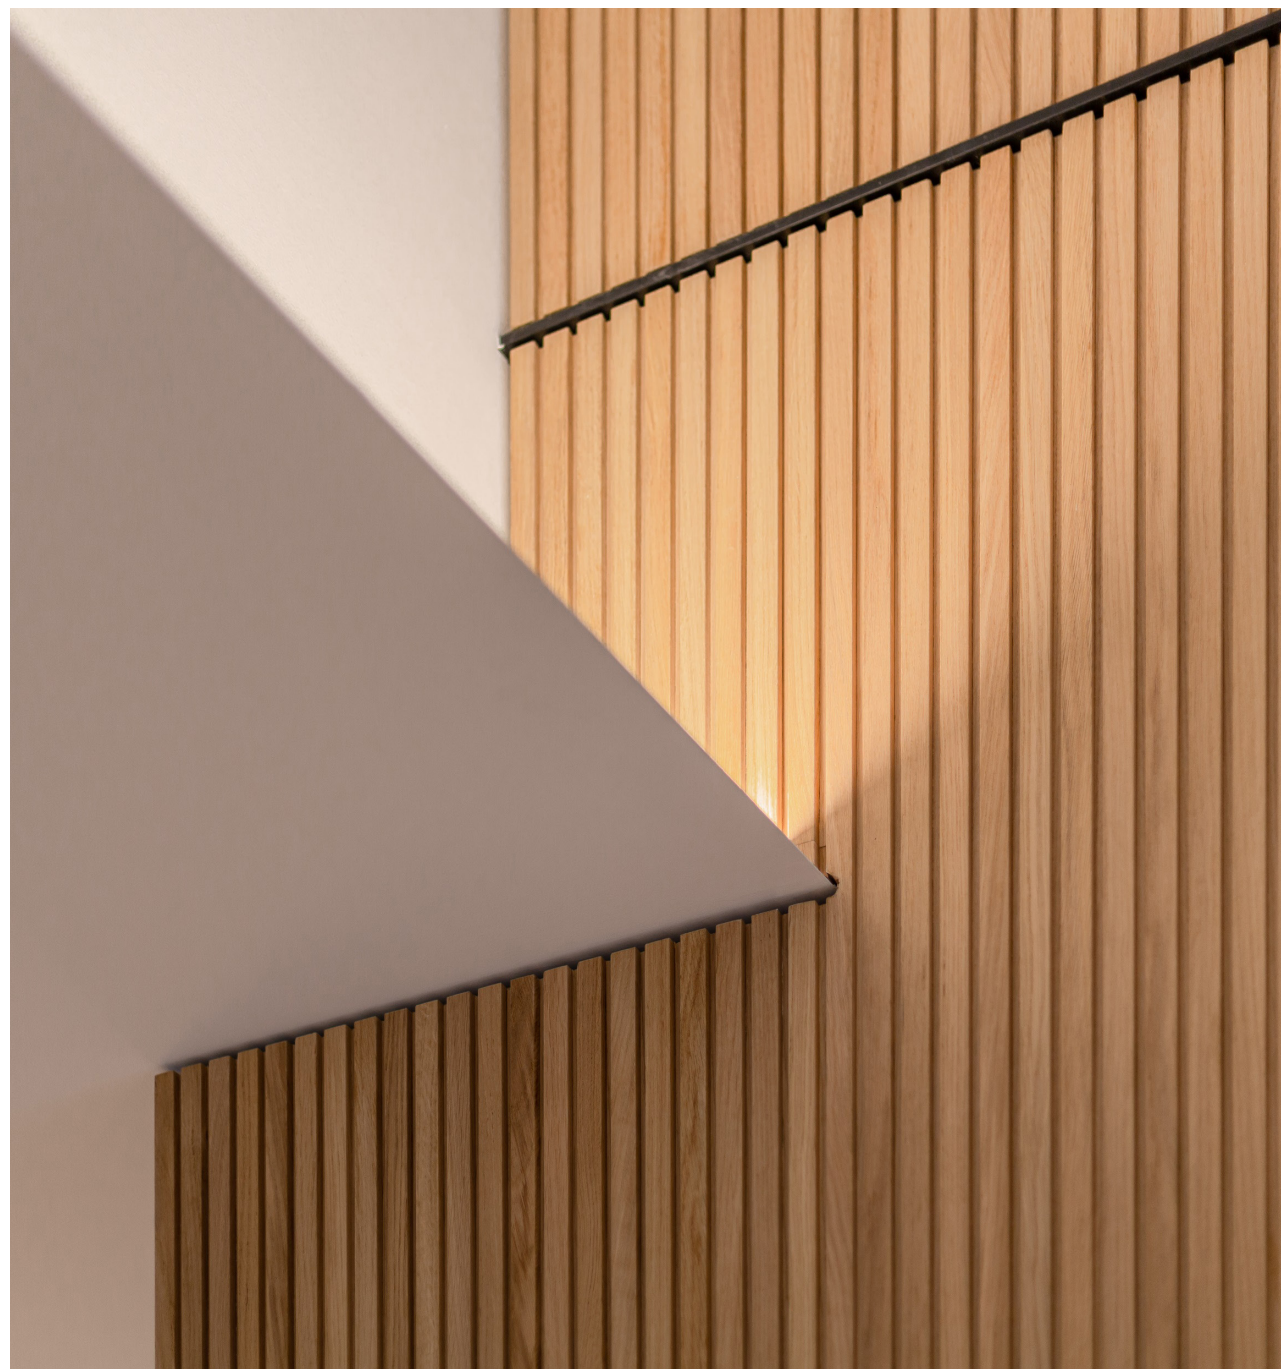

PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: FRAGMENTS DE MARC TORRA





PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: FRAGMENTS DE MARC TORRA




PROJECT: OCTAVIO MESTRE ARCHITECT

This is a small but superbly conceived design. Its profile enables us to easily create visual effects on the wall. It makes the job of the plasterboard assembly a lot easier and, thus, it helps us to save a lot of money.

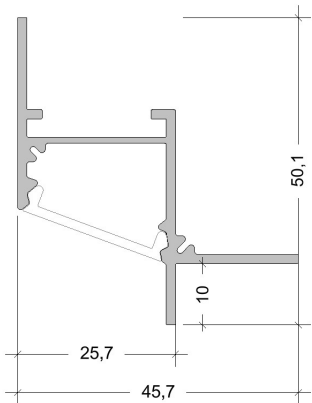





INDOOR




RECESSED




ALEXA, SIRI,
GOOGLE




DIMMABLE




CASAMBI




WIRELESS




OTHER COLOUR
TEMPERATURE



BIODYNAMIC



DIGITAL RGB



RGB

1. Profile

Reference	Description	Mounting	Finish	Size
423.00	Aresta profile with difusser	Recessed	<div></div> 30 Aluminium	M Linear meter
*Additional finishes available upon request				

2. Endcap

Reference	Description
423.11	Endcap (2 units)

3. LED Strip

See LedStrip Section

4. Driver

See Driver Section



Opticus is the product of the miniaturization of the LED profile combined with the capacity to control light through a single lens. The position of the LED using brackets in different locations makes it possible to set up the light according to the needs of the project: Narrow, Medium, Wide.



1. Profile

Reference	Description	Finish	Size
401.00	Opticus 2	10 White 20 Black 30 Aluminium	M Linear meter
*Additional finishes available upon request			

2. Cover


Reference	Light Distribution	Size
401.01	1 Narrow 15° 2 Medium 30° 3 Wide 60° 6 Opal 120°	M Linear meter

3. Endcap

Reference	Description	Finish
401.11	Endcap (2 units)	10 White 20 Black 30 Aluminium


401.11.01	Endcap plastic (2 units)
-----------	--------------------------

Beam Angles

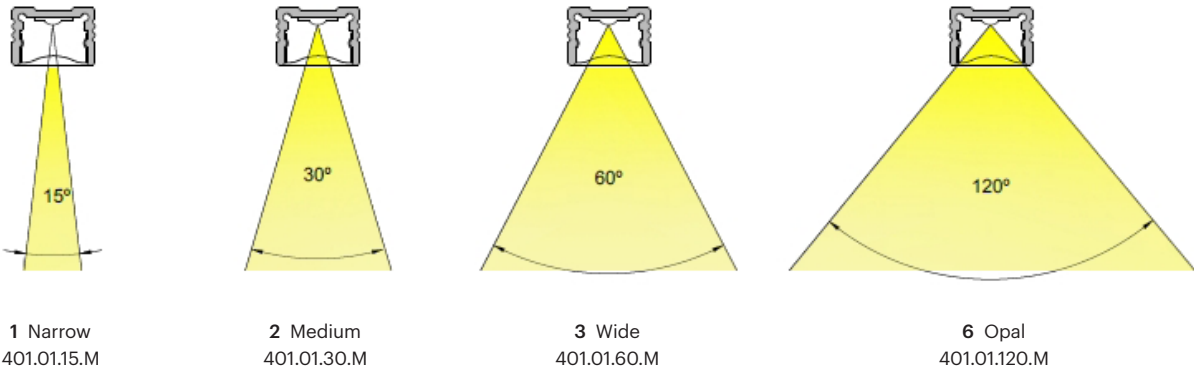

4. Fixations / Mounting kits

Reference	Description
401.21	Fixation clip (2 pieces)
401.22	Fixation clip 45° (2 pieces)
401.23	Fixation clip pivotable (2 pieces)

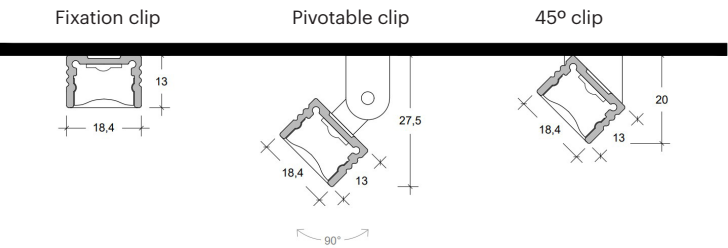

Pivotable clip



45° clip

5. Mechanical connections

Reference	Description
401.24	180° connector

6. LED Strip See LedStrip Section

7. Driver See Driver Section



HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS / PHOTO: OLGA PLANAS



Pivotable



45°



HOTEL GRAU ROIG / PROJECT: ISABEL LÓPEZ VILALTA+ASOCIADOS / PHOTO: OLGA PLANAS



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCÉ GOST PHOTO

Magneticus


415

GOOD NIGHT

Compact Profiles


GOOD NIGHT

Surface

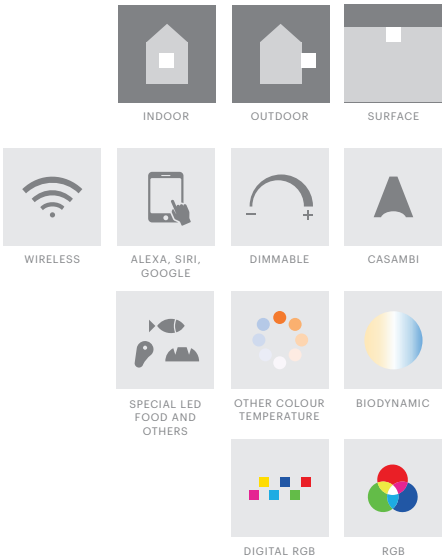


This aluminium lighting profile stands out for its functional elegance and ease of installation. Equipped with high-adhesion magnets, it enables quick and secure mounting on metal surfaces without the need for screws or tools. Its robust yet lightweight structure ensures durability, while the minimalist design blends seamlessly into any architectural space. Ideal for projects requiring efficiency, visual cleanliness, and versatility.

It can also be mounted on other surfaces such as plasterboard, wood, or similar materials using a clip.




2. Endcap

Reference	Description	Finish
415.11	Endcap (2 units)	<div><div>○ 10 White</div><div>● 20 Black</div><div>● 30 Aluminium</div></div>



3. Fixation Clip

Reference	Description
415.21	Fixation clip for ceiling (1 unit / 1m)



4. Mechanical Connections

Reference	Description
415.31	180° connector
415.32	90° connector


5. LED Strip

See LedStrip Section

6. Driver



See Driver Section



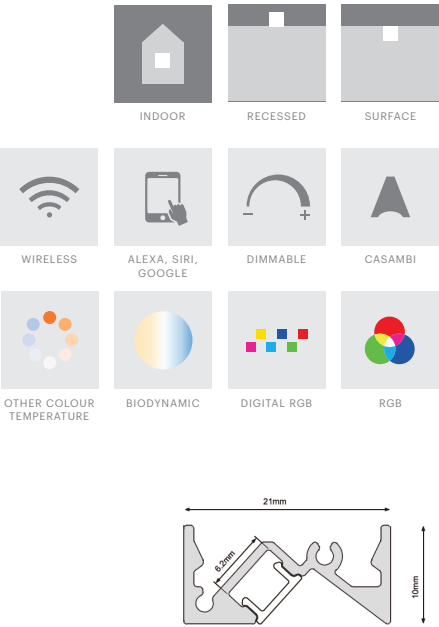

1. Profile

Reference	Description	Mounting	Finish	Size
430.00	Supellex profile with difusser	Recessed / Surface	<div><div></div>10 White</div> <div><div></div>20 Black</div> <div><div></div>30 Aluminium</div>	M Linear meter
*Additional finishes available upon request				

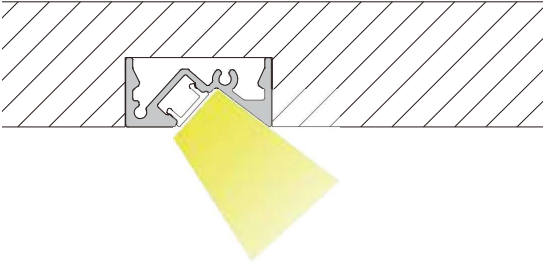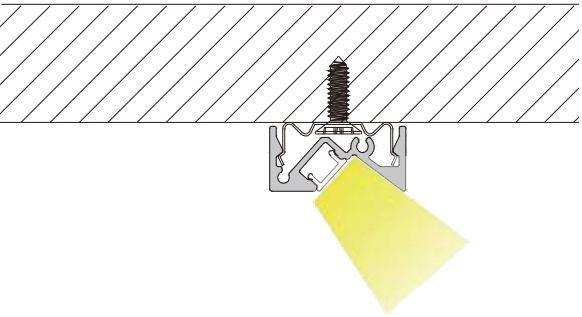

2. Endcap

Reference	Description	Finish
430.11	Endcap (2 units)	<div><div></div>10 White</div> <div><div></div>20 Black</div> <div><div></div>30 Aluminium</div>



3. Fixation Clip

Reference	Description
430.21	Mounting clip metal (1unit/0.5m)



4. LED Strip

See LedStrip Section

5. Driver

See Driver Section



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCE GOST PHOTO

Supellex

430



GOOD NIGHT

Recessed / Surface





Macreo Surface

428

GOOD NIGHT

Compact Profiles

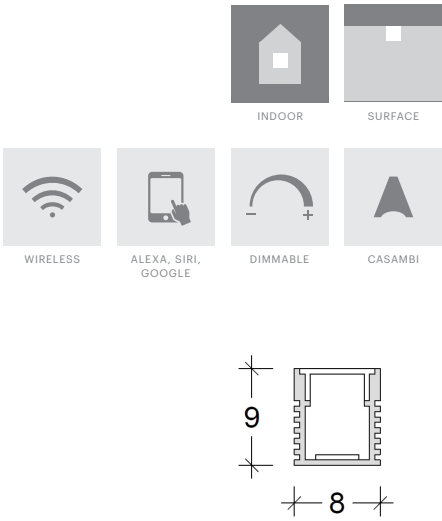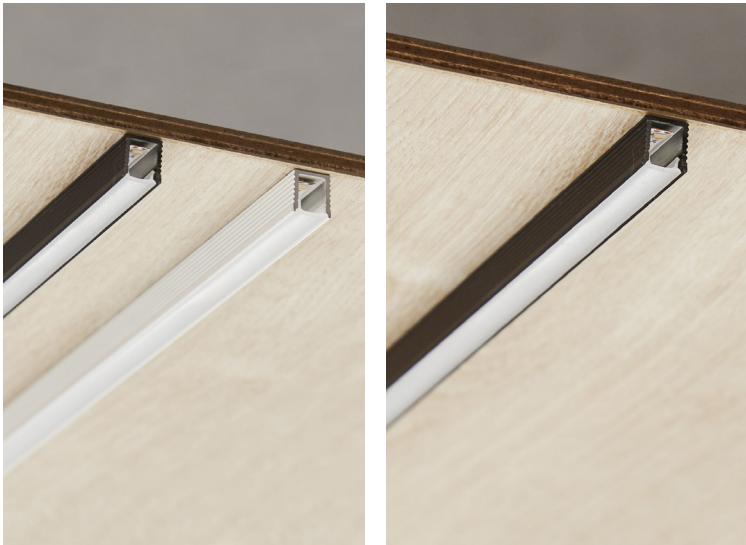

A brilliantly designed lighting solution that blends seamlessly into any space. Despite its tiny size, it delivers substantial illumination while remaining almost entirely hidden. Experience the power of discreet lighting with the Macreo profile with difusser.

1. Profile

Reference	Description	Mounting	Finish	Size
428.00	Macreo Surface profile with difusser	Surface	○ 10 White	M Linear meter
			● 20 Black	
			● 30 Aluminium	

2. Endcap

Reference	Description
428.11	Encap (2 units)

3. Fixation Clip

Reference	Description
428.21	Fixation clip

GOOD NIGHT

Surface

4. LED Strip See LedStrip Section

5. Driver See Driver Section



PROJECT: JOSEP CURANTA + PEPE GASCON / PHOTO: AITOR ESTEVEZ

Macreo Recessed


429

GOOD NIGHT

Compact Profiles

GOOD NIGHT

Recessed

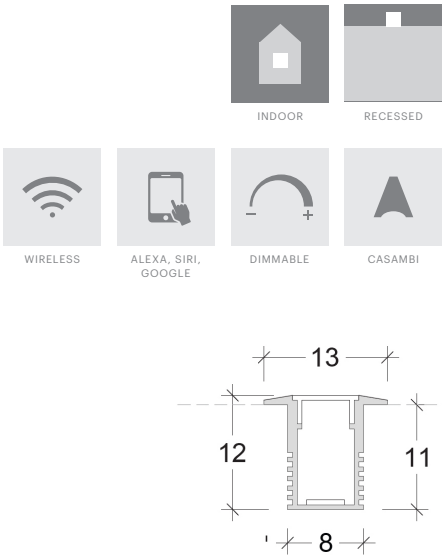

Same as Macreo profile with difusser but with its recessed mounting feature, the Macreo profile with difusser seamlessly integrates into any space, providing subtle yet effective illumination.

1. Profile

Reference	Description	Mounting	Finish	Size
429.00	Macreo Recessed profile with difusser	Recessed	○ 10 White	M Linear meter
			● 20 Black	
			● 30 Aluminium	

2. Endacap

Reference	Description
429.11	Encap (2 units)

*Additional finishes available upon request

3. LED Strip

See LedStrip Section

4. Driver

See Driver Section





EL CROSANET / PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA



PROJECT: SANDRA SOLER STUDIO



A clean, simple and elegant profile, which is both discreet and adaptable to any project. MURUS allows for an indirect, atmospheric, grazing, cool, and warm light. Its two lenses provide very interesting solutions that give the luminaires very different purposes, depending on which one we are using: either the extensive or the intensive. Designed to be assembled on a wall, in a way that it will make it as inconspicuous as possible, MURUS is the solution in any situation when you have no other option. It can either be used as a wall lamp or as a continuous light row.

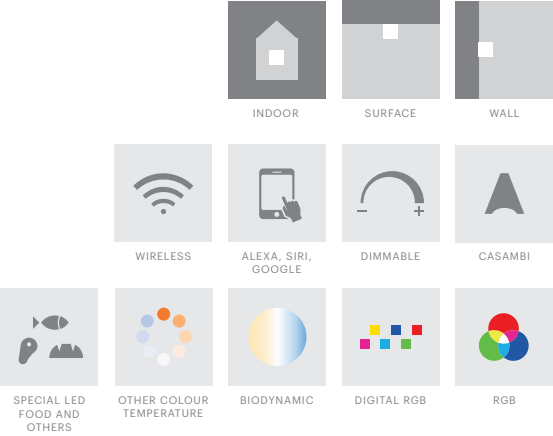

1. Profile

Reference	Description	Mounting	Finish	Size
421.00	Murus	Surface	<input type="radio"/> 10 White <input checked="" type="radio"/> 30 Aluminium	M Linear meter
*Additional finishes available upon request				



2. Cover

Reference	Light Distribution	Size
421.01	6 Opal 120° cover	M Linear meter
421.01	2 30° cover	



Opal cover



30° cover

3. Endcap

Reference	Description	Finish
421.11	Murus Endcap (2 units)	○ 10 White
		● 20 Black
		● 30 Aluminium

4. Fixations/Mounting Kits

Reference	Description
421.21	Wall clip (2 units)

5. LED Strip

See LedStrip Section

6. Driver

See Driver Section



PROJECT: JOSEP CURANTA + PEPE GASCON / PHOTO: AITOR ESTEVEZ




PROJECT: JOSEP CURANTA + PEPE GASCON / PHOTO: AITOR ESTEVEZ




With the arrival of the Flexibilis model, we welcome a new solution that allows us to make a circumference and cast the light either from its interior or its exterior, with aluminum profiles. With FLEXIBILIS, there will be no more need to use the loose led strip, which didn't contribute any safety or quality, and which ended up breaking down before long. No more need either to apply weird inventions that end up being more expensive than the led proper. With the FLEXIBILIS model, which bends easily to adapt to construction, these old problems are over.




INDOOR




OUTDOOR




SURFACE




WIRELESS



ALEXA, SIRI,
GOOGLE




DIMMABLE



CASAMBI




SPECIAL LED
FOOD AND
OTHERS



OTHER COLOUR
TEMPERATURE




BIODYNAMIC



DIGITAL RGB




RGB




6 mm

18 mm

Bracket detail





8 mm

19 mm



SON BRULL SUITES / PROJECT: CARMÉ PINÓS ARQ / PHOTO: ART SÁNCHEZ

Flexibilis

425

GOOD NIGHT

Compact Profiles

1. Profile

Reference	Description	Mounting	Size
425.00	Flexibilis profile with difusser	Surface	M Linear meter


2. Endcap

Reference	Description
425.11	Endcap (2 units)

3. Fixations / Mounting Kits

Reference	Description
425.21	Fixation clip

Bracket detail



4. LED Strip

See LedStrip Section

5. Driver

See Driver Section

GOOD NIGHT

Surface





CLÍNICA DENTAL / PROJECT: GLÒRIA TRULLA



CLÍNICA DENTAL / PROJECT: GLÒRIA TRULLA



This is a much needed, essential and multifunctional profile. TOTUS allows to light up any room and adapts easily to any project, so long as we use our imagination when using it. It can either be a suspended light over a work surface, a wall lamp for a painting, a mirror light, etc... Adaptable to whatever size is needed, this is the wildcard profile that one ends up using in any project. TOTUS solves your problem before you even know it.

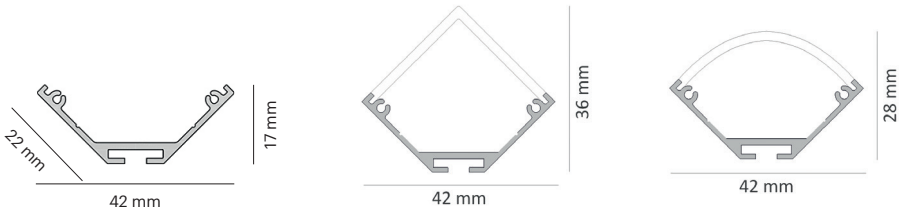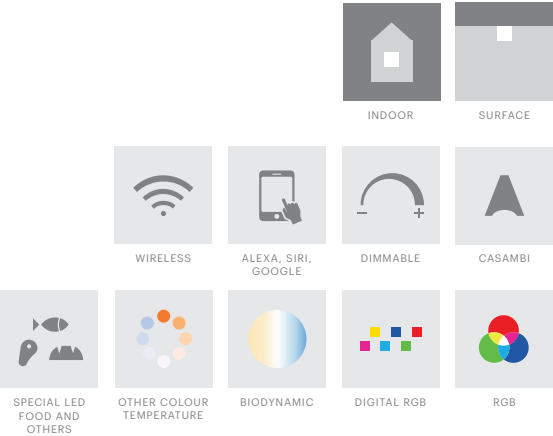

1. Profile

Reference	Description	Mounting	Finish	Size
422.00	Totus	Surface	<div><div></div> 10 White</div> <div><div></div> 20 Black</div> <div><div></div> 30 Aluminium</div>	M Linear meter
*Additional finishes available upon request				



SON BRULL SPA / PROJECT: FORTEZA+APARICIO / PHOTO: ART SÁNCHEZ

2. Cover

Reference	Description	Size
422.01.01	Semi-circle round cover	M Linear meter
422.01.02	Square cover	

3. Endcap

Reference	Description	Finish
422.11.01	Endcap for round cover (2 units)	○ 10 White
422.11.02	Endcap for square cover (2 units)	● 20 Black
		● 30 Aluminium

4. Fixations / Mounting Kits

Reference	Description
422.22	Totus suspended kit (2 wires, 2 holders & feeding)

5. Mechanical Connections

Reference	Description
422.31	Linear (180°) mechanical connection
422.32	90° mechanical connection
422.33.XXX	Custom connection



6. LED Strip

See LedStrip Section

7. Driver

See Driver Section



PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: FRAGMENTS DE MARC TORRA



This is a smart conceived design. Its profile enables us to easily create visual effects on the wall.

INDOOR

SURFACE

WIRELESS

ALEXA, SIRI,
GOOGLE

DIMMABLE


CASAMBI

OTHER COLOUR
TEMPERATURE




BIODYNAMIC

DIGITAL RGB

RGB



1. Profile


Reference	Description	Finish	Size
440.00	Trahea	 10 White	M Linear meter
		 20 Black	
		 30 Aluminium	
		*Additional finishes available upon request	

2. Cover

Reference	Description	Size
440.01.01	Trahea opal cover	M Linear meter
440.01.02	Trahea transparent cover	
440.01.03	Trahea black cover	

3. Endcap

Reference	Description
440.11	Trahea endcap (2 units)

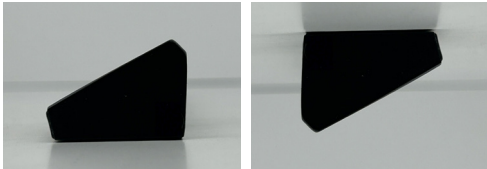

4. Fixations / Mounting Kits

Reference	Description
440.21	Trahea surface clip

5. LED Strip


See LedStrip Section


6. Driver

See Driver Section





PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA

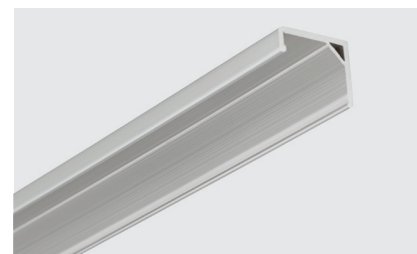

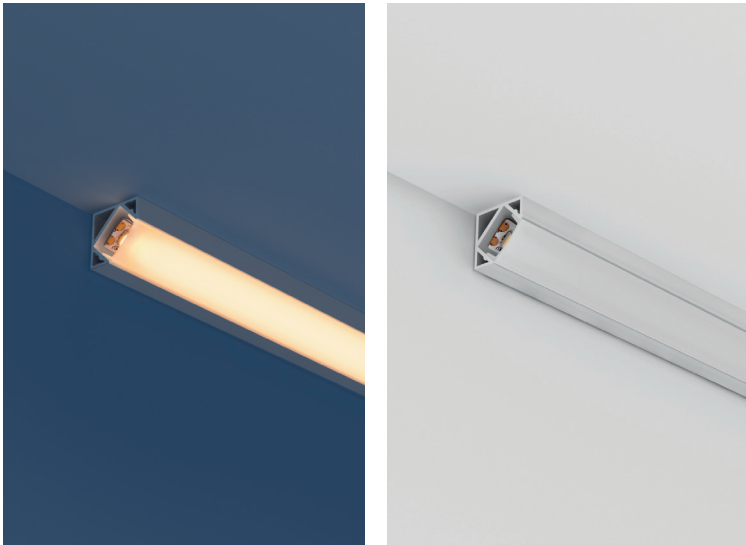

This linear lighting profile is specially designed to adapt effortlessly to corners. The design features precise angles, allowing for easy installation in various architectural settings. Whether used in residential or commercial spaces, this versatile profile delivers consistent, high-quality lighting, creating a clean and modern aesthetic.

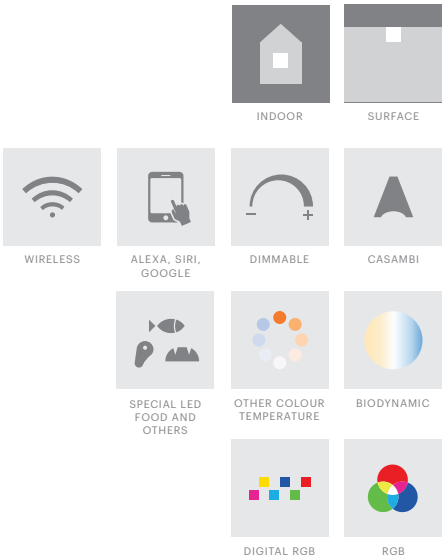

1. Profile

Reference	Description	Mounting	Finish	Size
427.00	Angulus profile with difusser	Surface	<div><div></div>30 Aluminium</div> <div>*Additional finishes available upon request</div>	M Linear meter

2. Endcap

Reference	Description
427.11	Endcap (2 units)

3. LED Strip

See LedStrip Section

4. Driver


See Driver Section



CASA RIERA ORDEIX / PROJECT: SANDRA SOLER STUDIO / PHOTO: IVÁN RAGA




PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR

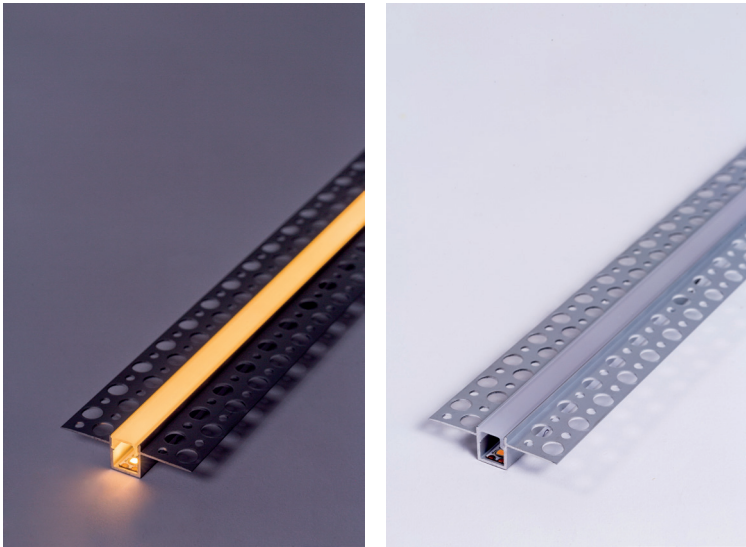

The Refundus is a 4-model family that has similar uses but serves different needs. Its frames are designed to be recessed in plasterboard walls (and ceilings) where there is only one thing in sight: the light. Without glaring the user, they allow to light up such rooms as bedrooms, corridors, dining rooms, living rooms, offices, etc., in a way that they absolutely integrate to architecture. They remain invisible and give off an elegant atmosphere, and the designer can spare himself from using the visible lamps when the architecture doesn't require them. It comes in 4 different versions -(P) flat on the wall, (I) in an interior corner, (E) in an exterior corner, and the Big Refundus, which is the same as the (P) but bigger, to achieve a bigger impact whenever necessary.

1. Profile

Reference	Description	Mounting	Size
406.00	Refundus-p profile with difusser	Recessed	M Linear meter

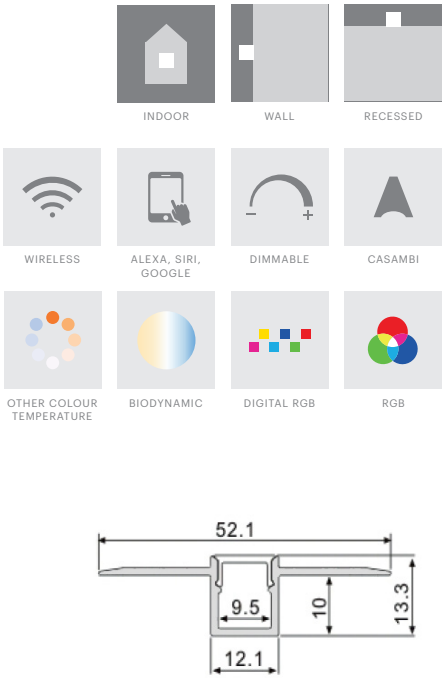

2. Endcap

Reference	Description
406.11	Endcap (2 units)



3. LED Strip

See LedStrip Section

4. Driver

See Driver Section





SIZE / PROJECT: MARTA BACQUELAINE



The Refundus is a 4-model family that has similar uses but serves different needs. Its frames are designed to be recessed in plasterboard walls (and ceilings) where there is only one thing in sight: the light. Without glaring the user, they allow to light up such rooms as bedrooms, corridors, dining rooms, living rooms, offices, etc., in a way that they absolutely integrate to architecture. They remain invisible and give off an elegant atmosphere, and the designer can spare himself from using the visible lamps when the architecture doesn't require them. It comes in 4 different versions -(P) flat on the wall, (I) in an interior corner, (E) in an exterior corner, and the Big Refundus, which is the same as the (P) but bigger, to achieve a bigger impact whenever necessary.

1. Profile

Reference	Description	Mounting	Size
407.00	Refundus-i profile with difusser	Recessed	M Linear meter

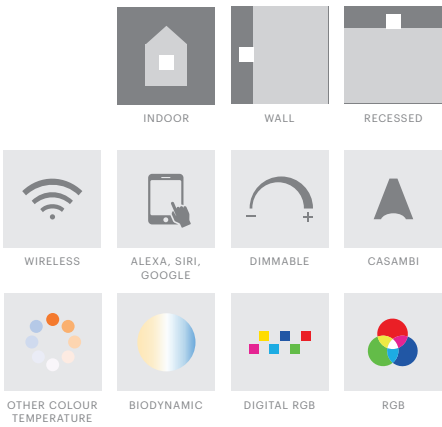

2. Endcap

Reference	Description
407.11	Endcap (2 units)







3. LED Strip

See LedStrip Section

4. Driver

See Driver Section

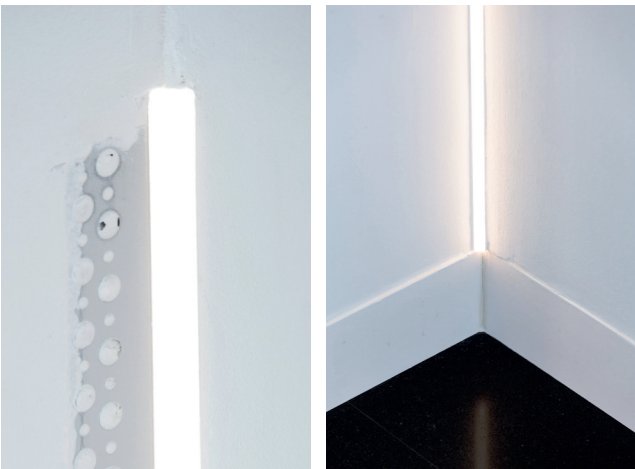

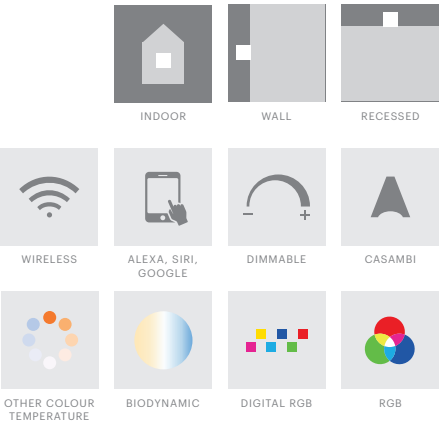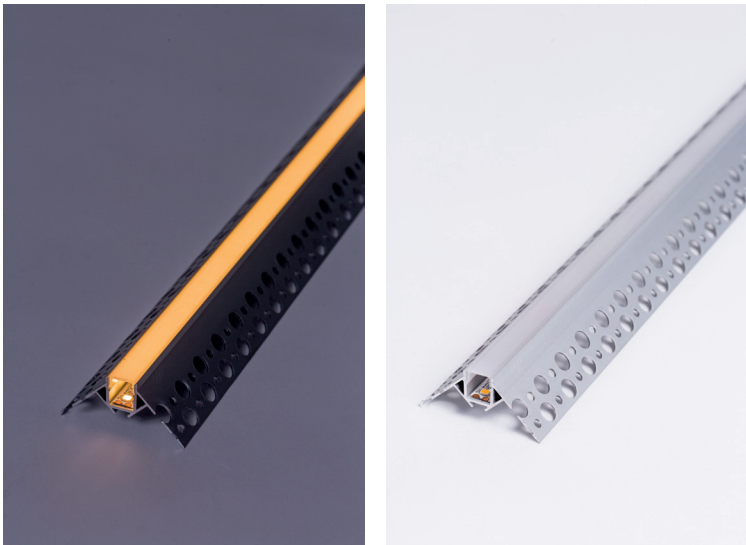

The Refundus is a 4-model family that has similar uses but serves different needs. Its frames are designed to be recessed in plasterboard walls (and ceilings) where there is only one thing in sight: the light. Without glaring the user, they allow to light up such rooms as bedrooms, corridors, dining rooms, living rooms, offices, etc., in a way that they absolutely integrate to architecture. They remain invisible and give off an elegant atmosphere, and the designer can spare himself from using the visible lamps when the architecture doesn't require them. It comes in 4 different versions -(P) flat on the wall, (I) in an interior corner, (E) in an exterior corner, and the Big Refundus, which is the same as the (P) but bigger, to achieve a bigger impact whenever necessary.

1. Profile

Reference	Description	Mounting	Size
408.00	Refundus-e profile with difusser	Recessed	M Linear meter

2. Endcap

Reference	Description
408.11	Endcap (2 units)





3. LED Strip

See LedStrip Section


4. Driver

See Driver Section



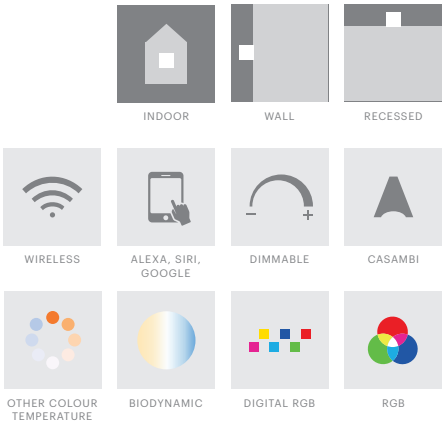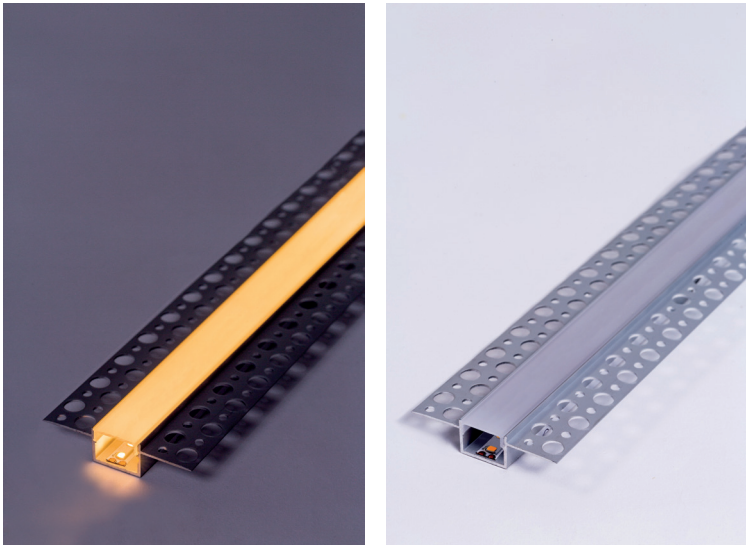

The Refundus is a 4-model family that has similar uses but serves different needs. Its frames are designed to be recessed in plasterboard walls (and ceilings) where there is only one thing in sight: the light. Without glaring the user, they allow to light up such rooms as bedrooms, corridors, dining rooms, living rooms, offices, etc., in a way that they absolutely integrate to architecture. They remain invisible and give off an elegant atmosphere, and the designer can spare himself from using the visible lamps when the architecture doesn't require them. It comes in 4 different versions -(P) flat on the wall, (I) in an interior corner, (E) in an exterior corner, and the Big Refundus, which is the same as the (P) but bigger, to achieve a bigger impact whenever necessary.



1. Profile

Reference	Description	Mounting	Size
409.00	Big Refundus profile with difusser	Recessed	M Linear meter

2. Endcap

Reference	Description
409.11	Endcap (2 units)



3. LED Strip

See LedStrip Section

4. Driver


See Driver Section




MAGIC BOX / PROJECT: ELASTIKO ARCHITECTS / PHOTO: JOSE HEVIA




Designed to provide convenient lighting solutions without the need for recessed installation. This luminaire offers the unique advantage of delivering linear light along walls effortlessly, eliminating the necessity for intricate plasterboard work. With its easy installation process, it seamlessly replaces traditional fixtures, making it a versatile choice for a variety of settings. Say goodbye to the hassle of recessed lighting and embrace the simplicity and efficiency of our surface luminaire.

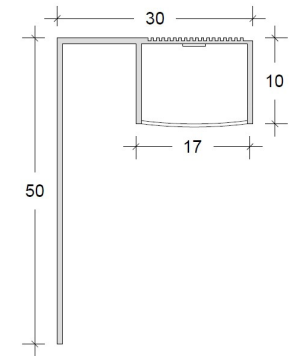





INDOOR




SURFACE




WIRELESS




ALEXA, SIRI,
GOOGLE




DIMMABLE




CASAMBI




OTHER COLOUR
TEMPERATURE



BIODYNAMIC






DIGITAL RGB



RGB

1. Profile

Reference	Description	Mounting	Finish	Size
419.00	Elis profile with difusser	Surface	 10 White	M Linear meter
			 20 Black	
			 30 Aluminium	
			*Additional finishes available upon request	

2. LED Strip

See LedStrip Section

3. Driver

See Driver Section








PROJECT: SANDRA SOLER STUDIO / PHOTO: MARC TORRA



LECIUS / EL CORTE INGLÉS



The Minimus-2 represents the natural technical evolution of the Minimus, while keeping the same expectations. Minimus represents simplicity and practicality brought to your everyday life. With little effort we have achieved a simple, small and practical design that offers several solutions for everyday projects: alcoves, kitchens, ledges, shelves, etc...

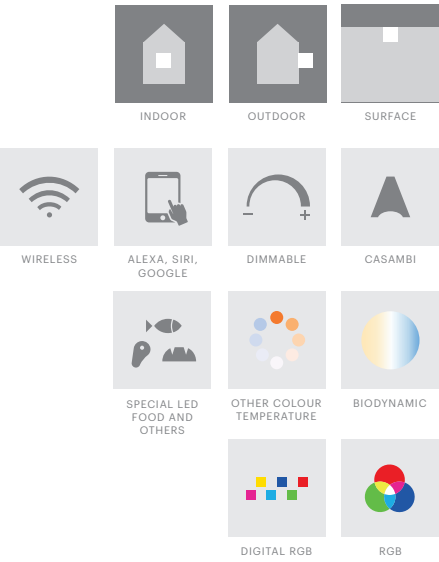

Bracket detail



CAN PERICUS / PROJECT: QUIM ROQUE / PHOTO: JAUME LIS



PROJECT: OCTAVIO MESTRE ARCHITECT



Minimus-2 Surface

412

GOOD NIGHT

Compact Profiles

1. Profile

Reference	Description	Mounting	Finish	Size
412.00	Minimus-2 Surface profile with difusser	Recessed	● 30 Aluminium	M Linear meter
*Additional finishes available upon request				

2. Endcap

Reference	Description
412.11	Endcap (2 units)



3. Fixations / Mounting Kits

Reference	Description
412.21	Fixation clip
412.29	Adjustable clip



4. Mechanical Connections

Reference	Description
412.31	180° connector
412.32	90° connector

5. LED Strip

See LedStrip Section

6. Driver

See Driver Section

GOOD NIGHT

Surface




PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR / PHOTO: FRAGMENTS DE MARC TORRA




PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA




We are expanding the Minimus-2 series with the R model, the recessed model in walls, ceilings, wooden, and metallic finishes... The minimum expression, now recessed and with a frame that allows for an easy installation. Small in size, the different light options in its interior make the MINIMUS series, and specifically the MINUMIS-2R, an essential series and model to practically any project.







INDOOR




RECESSED




WIRELESS




ALEXA, SIRI,
GOOGLE




DIMMABLE




CASAMBI




SPECIAL LED
FOOD AND
OTHERS




OTHER COLOUR
TEMPERATURE



BIODYNAMIC



DIGITAL RGB




RGB

1. Profile

Reference	Description	Mounting	Finish	Size
411.00	Minimus-2 Recessed profile with difusser	Recessed	<div></div> 30 Aluminium	M Linear meter


*Additional finishes
available upon request

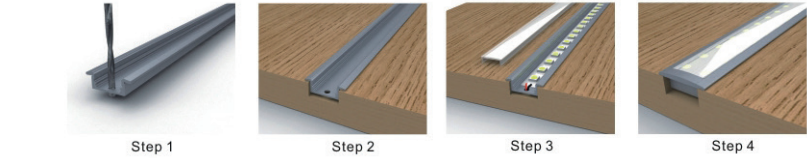

NUADTHAI SPA

2. Endcap

Reference	Description
411.11	Endcap (2 units)



3. LED Strip

See LedStrip Section

4. Driver


See Driver Section





PROJECT: ESTUDI MAITE PRATS ARQUITECTURA INTERIOR



The series is growing. New demands for our MINIMUS range forced us to increase the size of the profile for those rooms where more wattage is required. This new dimension also makes it possible to integrate water proof connectors (IP) within the profile itself. Also in those designs in which requirements demanded greater flexibility and which needed more solutions. The BIG helps us complete any space, no matter how complex, and nowadays, the whole MINIMUS series ended up being essential to solve many designs and adapt to all kind of budgets.



Bracket detail

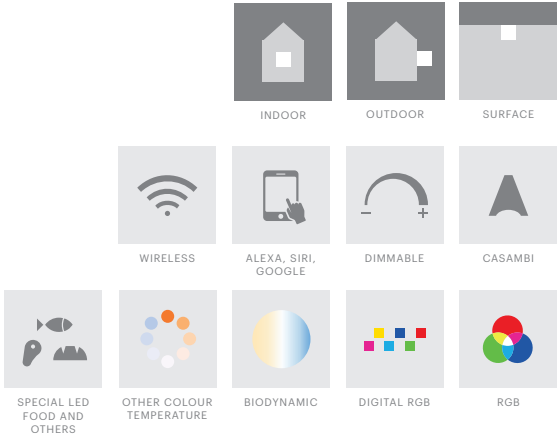


1. Profile

Reference	Description	Mounting	Finish	Size
418.00	Big Minimus profile with difusser	Surface	30 Aluminium	M Linear meter
*Additional finishes available upon request				

2. Endcap

Reference	Description
418.11	Endcap (2 units)



3. Fixations / Mounting Kits

Reference	Description
418.21	Fixation clip

4. LED Strip

See LedStrip Section

5. Driver

See Driver Section



LA MALLORQUINA / PROJECT: FRANCESC PONS

Compact profiles overview

GOOD NIGHT

										Cubus-2 Surface Cubus Recessed Aresta Totus Big Refundus Big Minimus	Cubus-2 Uplight	Minimus-2 Surface Minimus-2 Recessed Abscondere Elis	Trahea Angulus Mitis	Murus Flexibilis Opticus-2 Magneticus	Refundus	Macro Surface Macro Recessed Supellex
Reference	Description	Colour	IP	Cut LED Pitch (mm)	width	Wattage (W/m)	Density (LED/m)	Flux (lm/m)								
40806.27.20.M	LEDstrip teM 4,8W 2700K IP20 60/C90/4mm (€/m)	2700K	20	50	4	4,8	60	450								
40806.30.20.M	LEDstrip teM 4,8W 3000K IP20 60/C90/4mm (€/m)	3000K	20	50	4	4,8	60	450								
40806.40.20.M	LEDstrip teM 4,8W 4000K IP20 60C90/4mm (€/m)	4000K	20	50	4	4,8	60	450								
40810.27.20.M	LEDstrip teM 9,6W 2700K IP20 60/C90/4mm (€/m)	2700K	20	50	4	9,6	120	840								
40810.30.20.M	LEDstrip teM 9,6W 3000K IP20 60/C90/4mm (€/m)	3000K	20	50	4	9,6	120	840								
40810.40.20.M	LEDstrip teM 9,6W 4000K IP20 60/C90/4mm (€/m)	4000K	20	50	4	9,6	120	840								
40209.27.20.M	LEDstrip COB Cet-9W 2700K IP20 COB/C90/4mm (€/m)	2700K	20	16,7	4	9,0	COB	850								
40209.30.20.M	LEDstrip COB Cet-9W 3000K IP20 COB/C90/4mm (€/m)	3000K	20	16,7	4	9,0	COB	850								
40209.40.20.M	LEDstrip COB Cet-9W 4000K IP20 COB/C90/4mm (€/m)	4000K	20	16,7	4	9,0	COB	850								
40505.22.20.M	LEDstrip Tem-4,8W 2200K IP20 60/C90/8mm (€/m)	2200K	20	100	8	4,8	60	450								
40505.27.20.M	LEDstrip Tem-4,8W 2700K IP20 60/C90/8mm (€/m)	2700K	20	100	8	4,8	60	450								
40505.30.20.M	LEDstrip Tem-4,8W 3000K IP20 60/C90/8mm (€/m)	3000K	20	100	8	4,8	60	450								
40505.40.20.M	LEDstrip Tem-4,8W 4000K IP20 60/C90/8mm (€/m)	4000K	20	100	8	4,8	60	450								
40509.22.20.M	LEDstrip Tem-9,6W 2200K IP20 120/C80/8mm	2200K	20	10	8	9,6	120	840								
40509.27.20.M	LEDstrip Tem-9,6W 2700K IP20 120/C80/8mm	2700K	20	10	8	9,6	120	840								
40509.30.20.M	LEDstrip Tem-9,6W 3000K IP20 120/C80/8mm	3000K	20	10	8	9,6	120	840								
40509.40.20.M	LEDstrip Tem-9,6W 4000K IP20 120/C80/8mm	4000K	20	10	8	9,6	120	840								
40514.24.20.M	LEDstrip Tem-14,4W 2400K IP20 120/C80/8mm	2400K	20	10	8	14,4	120	1300								
40514.27.20.M	LEDstrip Tem-14,4W 2700K IP20 120/C80/8mm	2700K	20	10	8	14,4	120	1300								
40514.30.20.M	LEDstrip Tem-14,4W 3000K IP20 120/C80/8mm	3000K	20	10	8	14,4	120	1300								
40514.40.20.M	LEDstrip Tem-14,4W 4000K IP20 120/C80/8mm	4000K	20	10	8	14,4	120	1300								
40614.24.20.M	LEDstrip Tem-14,4W 2400K IP20 182/C90/8mm	2400K	20	33,3	8	14,4	182	1400								
40614.27.20.M	LEDstrip Tem-14,4W 2700K IP20 182/C90/8mm	2700K	20	38	8	14,4	182	1400								
40614.30.20.M	LEDstrip Tem-14,4W 3000K IP20 182/C90/8mm	3000K	20	38	8	14,4	182	1400								
40614.40.20.M	LEDstrip Tem-14,4W 4000K IP20 182/C90/8mm	4000K	20	38	8	14,4	182	1400								
40214.27.20.M	LEDstrip COB Tem-14,4W 2700K IP20 COB/C90/8mm (€/m)	2700K	20	45	8	14,4	COB	1400								
40214.30.20.M	LEDstrip COB Tem-14,4W 3000K IP20 COB/C90/8mm (€/m)	3000K	20	45	8	14,4	COB	1400								
40214.40.20.M	LEDstrip COB Tem-14,4W 4000K IP20 COB/C90/8mm (€/m)	4000K	20	45	8	14,4	COB	1400								
40619.24.20.M	LEDstrip Tem-19,2W 2400K IP20 240/C90/10mm	2400K	20	29	10	19,2	240	2300								
40619.27.20.M	LEDstrip Tem-19,2W 2700K IP20 240/C90/10mm	2700K	20	29	10	19,2	240	2300								
40619.30.20.M	LEDstrip Tem-19,2W 3000K IP20 240/C90/10mm	3000K	20	29	10	19,2	240	2300								
40619.40.20.M	LEDstrip Tem-19,2W 4000K IP20 240/C90/10mm	4000K	20	29	10	19,2	240	2300								
40348.30.20.M	LEDstrip teM-24W 3000K IP20 128/C80/12mm (€/m)	3000K	20	62,5	12	24	128	3042								
40314.24.65.M	LEDstrip Nix-14,4W 2400K IP65 120/C80/10mm	2400K	65	38	10	14,4	120	1000								
40324.24.65.M	LEDstrip Nix-24W 2400K IP65 120/C80/10mm	2400K	65	50,9	10	24	120	2000								
40210.27.65.M	LEDstrip COB Cet-10W 2700K IP65 COB/C90/10mm (€/m)	2700K	65	12	10	10,0	COB	1000								
40210.30.65.M	LEDstrip COB Cet-10W 3000K IP65 COB/C90/10mm (€/m)	3000K	65	12	10	10,0	COB	1000								
40210.40.65.M	LEDstrip COB Cet-10W 4000K IP65 COB/C90/10mm (€/m)	4000K	65	12	10	10,0	COB	1000								
40614.27.67.M	LEDstrip Tem-14,4W 2700K IP67 182/C90/10mm	2700K	67	5	10	14,4	182	1730								
40614.30.67.M	LEDstrip Tem-14,4W 3000K IP67 182/C90/10mm	3000K	67	5	10	14,4	182	1730								
40619.24.67.M	LEDstrip Tem-19,2W 2400K IP67 240/C90/12mm	2400K	67	25	12,5	19,2	240	2300								
40619.27.67.M	LEDstrip Tem-19,2W 2700K IP67 240/C90/12mm	2700K	67	25	12,5	19,2	240	2300								
40619.30.67.M	LEDstrip Tem-19,2W 3000K IP67 240/C90/12mm	3000K	67	25	12,5	19,2	240	2300								
40619.40.67.M	LEDstrip Tem-19,2W 4000K IP67 240/C90/12mm	4000K	67	25	12,5	19,2	240	2300								
40707.RGB.20.M	LEDstrip Cet- RGB 7,5W IP20 120/5mm	RGB	20	50	5	7,5	120	335								
40712.RGB.20.M	LEDstrip Cet- RGB 12W IP20 60/10mm	RGB	20	100	10	12	60	370								
40714.RGB.20.M	LEDstrip Cet- RGB 14W IP20 120/10mm	RGB	20	50	10	14	120	670								
40717.RGBW.20.M	LEDstrip Cet- RGBW 17,4W IP20 60/12mm	RGBW	20	100	12	17,4	60	836								
40719.RGBW.20.M	LEDstrip Cet- RGBW 19,2W IP20 240/12mm	RGBW	20	50	12	19,2	240	900								
40712.RGB.67.M	LEDstrip Cet- RGB 12W IP67 60/12mm	RGB	67	100	12,5	12	60	320								
40714.RGB.65.M	LEDstrip Cet- RGB 14W IP65 120/12mm	RGB	65	50	12,5	14	120	630								
40717.RGBW.65.M	LEDstrip Cet- RGBW 17,4W IP65 60/14mm	RGBW	65	100	14	17	60	815								

- Possible combination
- Possible but external connection between the wire and the LED Strip
- Not possible

Good Night Lighting Special Products is the result of a passion for light, of a deep knowledge about lighting and a long experience in lights. It comes with the intention to bring good light to all areas, to make them more pleasant and appealing, by adapting to their particular needs and making lighting synonymous with beauty and atmosphere.

We understand our products as quality lighting solutions based on technology, design and awareness of light that only experience can provide. Our lights are carefully selected to meet the requirements that allow us to fulfill our commitment in terms of comfort, quality and guarantee

Contact us

Good Night Lighting
Santiago Rusiñol, 14 nave B5
Pol. Ind. Can Humet de Dalt
08213 - Polinyà
Barcelona

+34 935 285 434
info@goodnight-lighting.com
www.goodnight-lighting.com

Graphic design
EXITDESIGN

Product photography
EXITDESIGN

Good Night assumes no liability or responsibility for any errors or omissions in the content of this catalogue.

Good Night reserves the right to alter any model or characteristics without prior notice.

This catalogue replaces all previous catalogues.

Good Night® is a registred trademark.

www.goodnight-lighting.com