







A luminaire designed for flexibility, Momentum offers both suspended and surface-mounted configurations, catering to diverse lighting needs. Choose between opal diffuse lighting for a soft ambient glow or UGR<19 optics for precise glare reduction. With its sleek profile and modern design, Momentum seamlessly integrates into any interior, enhancing the aesthetic appeal of the space. Ideal for commercial, hospitality, or residential settings, it sets the standard for versatile lighting solutions.

Up/Down Light



Surface / Suspended / Wall

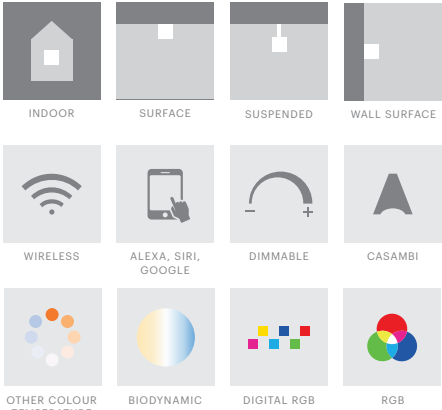

1. Profile


a. Profile + UGR Light <19

Reference	Wattage	Description	CCT	Light Distribution	Louvre Colour	Finish	Dim	Size
457.UGR	14 14W/m	LED 200mA 2600 lm/m	27 2700K	2 Medium 60°	W White	○ 10 White	NDI On/Off	M Linear meter
	24 24W/m	LED 350mA 4600 lm/m	30 3000K	3 Wide 90°	B Black	● 20 Black	DAL Dali	
			40 4000K			● 30 Aluminium	PDI Push Dimm	

*Additional finishes available upon request




Wide 90°



UGR ≤ 19 for 2600lm/m

Medium 60°



UGR ≤ 19



Louvre Colour




b. Profile + Direct Light Opal

Reference	Wattage	Description	CCT	Light Distribution	Finish	Dim	Size
457.OPD	16 16W/m	LED 200mA 2696 lm/m	27 2700K	6 Opal 120°	○ 10 White	NDI On/Off	M Linear meter
	24 24W/m	LED 300mA 4026 lm/m	30 3000K		● 20 Black	DAL Dali	
			40 4000K		● 30 Aluminium	PDI Push Dimm	

*Additional finishes available upon request



Opal Down 120°



c. Profile + Track 3-Phase

Reference	Position	Finish	Dim	Size
457.TRA	D Down	○ 10 White	NDI On/Off	M Linear meter
		● 20 Black	DAL DALI	
		● 30 Aluminium		
		*Additional finishes available upon request		




2. Cover Indirect Light Opal

Reference	Lumen	Description	CCT	Dim	Size
457.OPI	1000	14,4W/m LED 24V 120 Leds/m	27 2700K	NDI On/Off	M Linear meter
	2000	19,2W/m LED 24V 240 Leds/m	30 3000K	DAL Dali	
	3000	24W/m HE LED 24V 128 Leds/m (only 3000K)	40 4000K	PDI Push Dimm	
*Driver Incorporated					



Ledstrip UP Opal 120°



3. Endcap

Reference	Description	Finish
457.11	Endcap with screws (2 units)	○ 10 White
457.12	Endcap without screws (2 units)	● 20 Black
		● 30 Aluminium

4. Fixations & Connections

Reference	Description
457.21	Momentum & Cubus-2 surface clip for ceiling (1 unit / 1m)
457.22	Momentum & Cubus-2 suspension kit (1 unit / 1m & cable 2m) (Only Direct Light)
457.23	Momentum & Cubus-2 suspension kit (1 unit / 1m & cable 2m) (Only Indirect Light)
457.24	Momentum & Cubus-2 surface clip for wall (1 unit / 1m)
457.31	Momentum linear connection (if length > 3m)
457.32	Momentum connection 90°
457.33.XXX	Momentum custom connection XXX



PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA



PROJECT: SANDRA SOLER STUDIO / PHOTO: MERCE GOST PHOTO

5. Power feed & Electrification

Surface

Reference	Description
457.41	Momentum & Cubus-2 power feed for surface mounting

Suspension

Reference	Description	Finish	Dim
457.42	Momentum power feed kit and electrification for suspension (cable 2m)	○ 10 White	NDI On/Off
		● 20 Black	DAL Dali
		● 30 Aluminium	PDI Push Dimm





PROJECT: SANDRA SOLER STUDIO / PHOTO: FRAGMENTS DE MARC TORRA



PIMEC / PROJECT: PARIS CAMPS / PHOTO: PARIS CAMPS



PIMEC / PROJECT: PARIS CAMPS / PHOTO: PARIS CAMPS



PIMEC / PROJECT: PARIS CAMPS / PHOTO: PARIS CAMPS



OFFICE BUILDING BARCELONA / PROJECT: PARIS CAMPS / PHOTO: JORGE DE JORGE